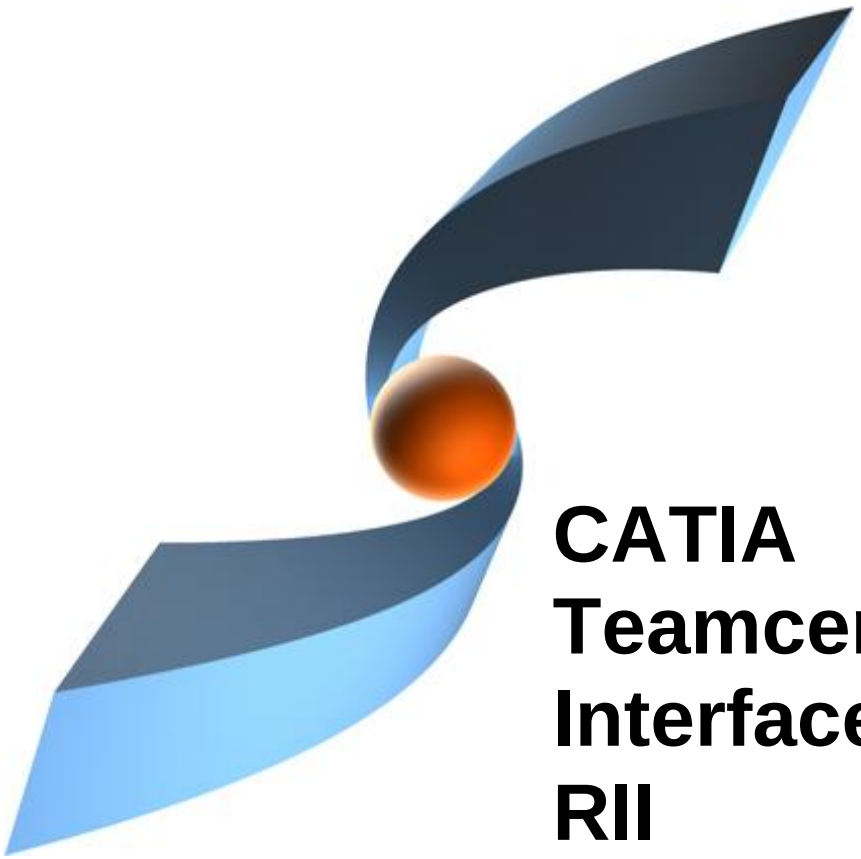

CATIA Teamcenter Interface RII

CMI RII Release 3.5

User Manual

Copyright

© 1999, 2009, 2013 T-Systems International GmbH.
All rights reserved. Printed in Germany.

Contact

T-Systems International GmbH
GDC Product Lifecycle Management
Fasanenweg 5
70771 Leinfelden-Echterdingen
Germany

http://www.cmi-support.com

☎ +49 (0)40 5395-2020
✉ +49 (0)391 5801-25688
mail : *cmi_support@t-systems.com*

Manual History

Version	Date
1.0	December 2008
1.1	February 2009
1.2	March 2009
2.0	July 2009
2.1	October 2009
2.2	April 2010
2.3	November 2010
3.0	April 2011
3.1	November 2011
3.2	April 2012
3.3	November 2012
3.4	April 2013
3.5	November 2013

This edition obsoletes all previous editions.

Trademarks

CATIA is a registered trademark of Dassault Systèmes.

Teamcenter is a registered trademark of Siemens PLM Corporation.

Metaphase is a registered trademark of Metaphase Technology, Inc.

Names of other products mentioned in this manual are used only for identification purpose and may be trademarks of their companies.

Preface

This manual describes the main functionality delivered by the CATIA Teamcenter Interface (CMI RII) and includes the creation, storage, modification, and management of CATIA models and assembly structures in the Teamcenter PDM system.

About this Manual

This manual is intended for end users of the CATIA Teamcenter Interface. It assumes that the reader is familiar with the CATIA application and with Teamcenter Rich Client.

Related Documents

The following manuals contain information about installation, usage and customization of the CATIA Teamcenter Interface:

Manual Title	Version
CATIA Teamcenter Interface RII Installation Manual	3.5
CATIA Teamcenter Interface RII User Manual	3.5
CATIA Teamcenter Interface RII Customizing Manual	3.5

Organization

This manual contains the following chapters:

Chapter 1 provides basic information about the CATIA Teamcenter Interface and describes some features of this application interface.

Chapter 2 describes how to start CATIA within the Teamcenter environment and also how to enable the CMI functionality within CATIA V5.

Chapter 3 introduces the *CMI RII Application* with a general explanation and then by listing its functions. The goal of this chapter is to make the user familiar with this component. The *CMI RII Application* functions will be explained in subsequent chapters.

Chapter 4 describes how to handle CATIA relevant data in Teamcenter.

Chapter 5 explains how to work with CATIA V5.

Glossary contains the CATIA Teamcenter Interface terminology.

Conventions Used in this Manual

This font	Is used for document titles and emphasis.
Item 1→Item 2	Is used to identify a menu path to reach a specific function.
	This icon is used to identify tips and attention advises.
	This icon is used to identify Teamcenter related sections and actions.
	This icon is used to identify CATIA V5 related sections and actions.

Your Comments are Welcome

Please feel free to tell us your opinion; we are always interested in improving our publications. Mail your comments to:

T-Systems International GmbH
GDC Product Lifecycle Management
Fasanenweg 5
70771 Leinfelden-Echterdingen
Germany

E-mail: *cmi_support@t-systems.com*

Table of Contents

CHAPTER 1 1

OVERVIEW 1

INTRODUCING CMI (CATIA TEAMCENTER INTERFACE) 1
CMI RII JOINS THE ADVANTAGES OF CAD WITH PDM 1
CMI ARCHITECTURE 2

CHAPTER 2 3

GETTING STARTED 3

ASSUMPTIONS 3
STARTING APPLICATIONS 3
ENABLING THE CMI TOOLBAR IN CATIA V5 3

CHAPTER 3 5

THE CMI RII APPLICATION 5

WHAT IS THE CMI RII APPLICATION? 5
THE CMI RII APPLICATION MENU 6
Menu item File 6
Menu item Edit 6
Menu item Tools 8
Menu item Window 9
Menu item Help 9
POP-UP MENUS OF CMI RII ITEMS 10
Items in the CMI RII Application 10
Models in the CMI RII Application 11
Single Model handling in the CMI RII Application 11

ENHANCEMENTS IN THE STRUCTURE MANAGER APPLICATION 13

CMI RII MENU BAR IN THE STRUCTURE MANAGER APPLICATION 13
Menu item CMI RII 13

ENHANCEMENTS IN THE MULTI-STRUCTURE MANAGER APPLICATION 19

CMI RII MENU BAR IN THE MULTI-STRUCTURE MANAGER APPLICATION 19
Menu item CMI RII 19

ENHANCEMENTS IN THE MANUFACTURING PROCESS PLANNER APPLICATION22

CMI RII MENU BAR IN THE MANUFACTURING PROCESS PLANNER APPLICATION 22
Menu item CMI RII 22

ENHANCEMENTS IN THE MY TEAMCENTER APPLICATION 25

CMI RII MENU BAR IN THE MY TEAMCENTER APPLICATION 25
Menu item File 25
Menu item CMI RII 26

CHAPTER 4 37

CATIA RELEVANT OBJECTS IN TEAMCENTER 37

PREDEFINED OBJECT STRUCTURE 37
WORKING WITH STRUCTURES 38
Creating an Item 38
Searching for Items 38
Creating a Structure 39
Example Structure for CMI 39
UPDATING A STRUCTURE 43
HIGHLIGHTING AN ITEM IN CATIA 44

SEND TO CATIA 45

CHAPTER 5 47

WORKING WITH CATIA V5 47

INTRODUCTION 47
PRODUCT STRUCTURE CATIA V5 VS. TEAMCENTER 47
CMI TOOLBAR 47
CATDRAWINGS IN CMI RII APPLICATION IN TEAMCENTER 48
CMI TOOLBAR: READ FROM WORKBENCH 50
CMI TOOLBAR: UPDATE TEAMCENTER 50
CMI TOOLBAR: SYNCHRONIZATION IN TEAMCENTER 51
CMI TOOLBAR: HIGHLIGHT IN WORKBENCH 56
CMI TOOLBAR: BROWSE IN TEAMCENTER 56
CMI TOOLBAR: CREATES/ATTACHES AN ARCHIVE 56
CMI TOOLBAR: GET ORIGINAL GEOMETRY FROM TEAMCENTER 57
CMI TOOLBAR: INSERT FROM TEAMCENTER 57
CMI TOOLBAR: REPLACE FROM TEAMCENTER 58
CMI TOOLBAR: ADD TEMP 58
Visualize multiple revisions of an Assembly using Add Temp 59
CMI TOOLBAR: COMPARE VERSION 60
CMI TOOLBAR: BUILD VISUALIZATION 60
CMI TOOLBAR: RECONNECT WITH TEAMCENTER 61
CMI TOOLBAR: MANAGE CATALOGS 62
CMI TOOLBAR: LOCAL SAVE AND RESTORE 63
CMI TOOLBAR: CMI INFO 63
CMI TOOLBAR: CHECK IN/CHECK OUT 65
HANDLING OF CATDRAWINGS 66
Creating a CATDrawing from a Single Model 66
Creating a CATDrawing from a Product Structure 66
Derived files for CATDrawing 67
Automatic Update of CATDrawing title block parameter 67
HANDLING OF CGM FILES 68
HANDLING OF CGR AND MODEL FILES 69
HANDLING OF CATALOGS 70
Manage Catalogs 70
Read Catalog 72
Insert CATScript into Catalog 73
Update or Create Catalog 75
HANDLING OF CMIARCHIVES 77
Creates/Attaches an Archive 77
Modify non CATIA archive content 81
Support for BOM Parts under CMIArchive 82
HANDLING OF CATANALYSIS 84
Analysis stored in a CATAnalysis dataset 84
Analysis stored in a CMIArchive dataset 86
HANDLING OF CATPROCESS 90
HANDLING OF DESIGN TABLES 92
Display Design Table 93
Create Design Table 93
Update Design Table 95
Remove Design Table 97
SUPPORT OF CATIA V5 RELEASED CACHE 99
OPTIONAL COMMANDS 100
SaveAs in Teamcenter 100
Update Position 101
Update Part 101
Restore Positions 101
Choose Update Position 101
Choose Update Geometry 102
Revise 102
Dataset pseudo Revise 103

Automatic CATDUA *103*
Verification of CATIA Release *106*
Representation Formats in CATIA V5 ..... *107*
Import and Export using a mapping file *108*
Export to Folder *109*

GLOSSARY 113

Table of Figures

FIGURE 1: CATIA TEAMCENTER INTERFACE ARCHITECTURE 2
FIGURE 2: TEAMCENTER RICH CLIENT START WINDOW 5
FIGURE 3: CMI RII APPLICATION WINDOW 6
FIGURE 4: CMI RII APPLICATION MENU ITEMS 6
FIGURE 5: CMI RII APPLICATION MENU 'FILE' 6
FIGURE 6: CMI RII APPLICATION MENU 'EDIT' 6
FIGURE 7: THE CMI RII OPTIONS DIALOG 8
FIGURE 8: CMI RII APPLICATION MENU 'TOOLS' 8
FIGURE 9: CMI RII APPLICATION MENU 'WINDOW' 9
FIGURE 10: CMI RII APPLICATION MENU 'HELP' 9
FIGURE 11: CMI RII APPLICATION ABOUT DIALOG. 9
FIGURE 12: CONTEXT MENU ON A LINE IN THE CMI RII APPLICATION 10
FIGURE 13: CONTEXT MENU ON A DATASET IN THE CMI RII APPLICATION 11
FIGURE 14:CMI RII SEND TO CATIA PREFERENCES 12
FIGURE 15:EXTENDED CONTEXT MENU ON A LINE IN THE CMI RII APPLICATION 12
FIGURE 16:EXPANDED MODEL WITH CONTEXT MENU 12
FIGURE 17: STRUCTURE MANAGER APPLICATION WITH CMI RII MENU 13
FIGURE 18: STRUCTURE MANAGER MENU 'CMI RII' 13
FIGURE 19: STRUCTURE MANAGER APPLICATION WITH SEND TO CATIA COMMAND 14
FIGURE 20: STRUCTURE MANAGER APPLICATION WITH SEND DMU TO CATIA COMMAND 14
FIGURE 21: STRUCTURE MANAGER APPLICATION WITH SEND SELECTED TO CATIA COMMAND 15
FIGURE 22: VOLUME DEFINITION DIALOG 16
FIGURE 23: CMI RII PREFERENCES PANEL 16
FIGURE 24: SELECTED RESULT LINES IN STRUCTURE MANAGER 17
FIGURE 25: NEIGHBOURHOOD SEARCH 18
FIGURE 26: MULTI-STRUCTURE MANAGER APPLICATION WITH CMI RII MENU 19
FIGURE 27: MULTI-STRUCTURE MANAGER MENU 'CMI RII' 19
FIGURE 28: MULTI-STRUCTURE MANAGER APPLICATION WITH SEND TO CATIA COMMAND 20
FIGURE 29: MULTI-STRUCTURE MANAGER APPLICATION WITH SEND DMU TO CATIA COMMAND 20
FIGURE 30: MANUFACTURING PROCESS PLANNER APPLICATION WITH CMI RII MENU 22
FIGURE 31: MANUFACTURING PROCESS PLANNER MENU 'CMI RII' 22
FIGURE 32: MANUFACTURING PROCESS PLANNER APPLICATION WITH SEND TO CATIA COMMAND 23
FIGURE 33: MANUFACTURING PROCESS PLANNER APPLICATION WITH SEND DMU TO CATIA COMMAND 24
FIGURE 34: MY TEAMCENTER APPLICATION WITH CMI RII MENU 25
FIGURE 35: MY TEAMCENTER MENU 'FILE' 25
FIGURE 36: MY TEAMCENTER MENU 'CMI RII' 26
FIGURE 37: MY TEAMCENTER APPLICATION 27
FIGURE 38: SEND CONFIGURED TO CATIA DIALOG 27
FIGURE 39: CREATE DIALOG FOR CATIA BOM PART DATASET FOR ITEM REVISION 30
FIGURE 40: CREATE DIALOG FOR CATIA AUX PART DATASET FOR ITEM REVISION 30
FIGURE 41: CREATE DIALOG FOR CATIA PRODUCT DATASET FOR ITEM REVISION 31
FIGURE 42: CREATE DIALOG FOR CATIA DRAWING DATASET FOR ITEM REVISION 32
FIGURE 43: CREATE DIALOG FOR CATIA BOM PART ITEM 33
FIGURE 44: CREATE DIALOG FOR CATIA AUX PART DATASET 33
FIGURE 45: CREATE DIALOG FOR CATIA PRODUCT ITEM 34
FIGURE 46: CREATE DIALOG FOR CATIA DRAWING DATASET 35
FIGURE 47: PREDEFINED CATPRODUCT OBJECT STRUCTURE 37
FIGURE 48: PREDEFINED CATPART OBJECT STRUCTURE 38
FIGURE 49: EXAMPLE OF AN EXPANDED ASSEMBLY IN TEAMCENTER STRUCTURE MANAGER APPLICATION 39
FIGURE 50: EMPTY TEAMCENTER STRUCTURE MANAGER APPLICATION 39
FIGURE 51: STRUCTURE MANAGER APPLICATION WITH "TABLE" 40
FIGURE 52: STRUCTURE MANAGER APPLICATION WITH "TABLE", "PLATE", AND "LEG" 40

FIGURE 53: MY TEAMCENTER APPLICATION WITH "PLATE" 41
FIGURE 54: NEW DATASET DIALOG 41
FIGURE 55: STRUCTURE MANAGER APPLICATION WITH COMPLETE "TABLE" 42
FIGURE 56: CMI RII APPLICATION WITH COMPLETE "TABLE" 42
FIGURE 57: CATIA V5 WITH LOADED "TABLE" 43
FIGURE 58: CATIA V5 WITH UPDATED "TABLE" 43
FIGURE 59: CMI RII APPLICATION WITH COMPLETE "TABLE" 44
FIGURE 60: "TABLE" ITEM IN MY TEAMCENTER 44
FIGURE 61: HIGHLIGHT IN CATIA IN POP-UP MENU IN CMI RII APPLICATION 45
FIGURE 62: HIGHLIGHTED ITEM IN CATIA V5 45
FIGURE 63: MY TEAMCENTER CONTEXT MENU FOR ITEM REVISION 46
FIGURE 64: PRODUCT STRUCTURE IN TEAMCENTER AND CATIA V5 47
FIGURE 65: CMI TOOLBAR IN CATIA V5 48
FIGURE 66: CMI RII APPLICATION WITH A CATDRAWING DATASET 49
FIGURE 67: DRAWING WORKBENCH FOR READ, UPDATE, CREATE OR SAVE AS CATDRAWING 49
FIGURE 68: DIALOG WINDOW FOR UPDATE TEAMCENTER 51
FIGURE 69: THE SYNCHRONIZE TEAMCENTER DIALOG 52
FIGURE 70: EDIT NEW PDM-PART CATEGORY DIALOG 53
FIGURE 71: THE SYNCHRONIZATION IN TEAMCENTER DIALOG WITH SUCCESS 54
FIGURE 72: THE CREATE ITEM DIALOG 54
FIGURE 73: THE CREATE ITEM DIALOG WITH FORMS 55
FIGURE 74: SELECT THE ITEM TYPE IN THE CREATE ITEM DIALOG 55
FIGURE 75: REMEMBER ATTRIBUTES OF THE CREATE DIALOG 56
FIGURE 76: DO NOT ACTIVATE DEFAULT SHAPES ON OPEN OPTION IN CATIA V5 57
FIGURE 77: RECONNECT DIALOG 61
FIGURE 78: INFORMATION DIALOG WINDOW FOR CATPRODUCT WITH "MORE ATTRIBUTES" 64
FIGURE 79: CMI INFORMATION FOR MULTIPLE ITEMS 65
FIGURE 80: CHECK IN/CHECK OUT DIALOG 65
FIGURE 81: OPTIONS DIALOG IN TEAMCENTER 67
FIGURE 82: CATDRAWING PARAMETER IN CATIA V5 68
FIGURE 83: MANAGE REPRESENTATION DIALOG OF CATIA V5 69
FIGURE 84: MANAGE REPRESENTATION DIALOG OF CATIA V5 WITH NEW MODEL FILE 70
FIGURE 85: SELECT CATALOG FOR BROWSING DIALOG 71
FIGURE 86: BOLT CATALOG OPENED IN CATIA V5 71
FIGURE 87: SELECT CATALOG FOR EDITING DIALOG 72
FIGURE 88: EDIT CATALOG IN CATIA V5 73
FIGURE 89: QUERY SCRIPT DATASET DIALOG 74
FIGURE 90: QUERY RESULT DIALOG FOR SCRIPT DATASETS 74
FIGURE 91: CATALOG WITH INSERTED SCRIPT 74
FIGURE 92: SYNCHRONIZE CATALOG DIALOG 75
FIGURE 93: CONFIRMATION DIALOG FOR UNKNOWN ENTRIES IN THE SYNCHRONIZE CATALOG COMMAND 76
FIGURE 94: SYNCHRONIZE CATALOG WITH SUCCESS 76
FIGURE 95: ITEM 000160 IN THE CMI RII APPLICATION WINDOW 77
FIGURE 96: LOADED ITEM 000160 IN CATIA V5 78
FIGURE 97: CMIARCHIVE ROOT PRODUCT WITH THREE CHILDREN 78
FIGURE 98: CREATE CMIARCHIVE DATASET DIALOG 79
FIGURE 99: UPDATE PARENT PRODUCT MESSAGE BOX 79
FIGURE 100: CMI MESSAGES WINDOW 80
FIGURE 101: CMIARCHIVE ITEM IN TEAMCENTER 80
FIGURE 102: CMIARCHIVE INFORMATION 81
FIGURE 103: MODIFY NON CATIA CMIARCHIVE CONTENT 82
FIGURE 104: BOM PART IN CMIARCHIVE 83
FIGURE 105: SYNCHRONIZE TEAMCENTER OF CMIARCHIVE 83
FIGURE 106: CREATED RELATION FOR THE BOM PART 84
FIGURE 107: CATANALYSIS 85
FIGURE 108: SYNCHRONIZE TEAMCENTER OF CATANALYSIS 85
FIGURE 109: EXISTING ITEM IN TEAMCENTER 86
FIGURE 110: EXPAND ANALYSIS IN CMI RII APPLICATION 86
FIGURE 111: EXISTING ITEM IN TEAMCENTER 87
FIGURE 112: ITEM LOADED BY CMI 87

FIGURE 113: CMI PRODUCT WITH EXISTING CATANALYSIS 88
FIGURE 114: CMIARCHIVE ITEM WITH CATANALYSIS IN TEAMCENTER 88
FIGURE 115: CMI RII APPLICATION WITH CMIARCHIVE 89
FIGURE 116: EXISTING CMIARCHIVE WITH CATANALYSIS LOADED BY CMI 89
FIGURE 117: TEAMCENTER NEW DATASET DIALOG 90
FIGURE 118: PART WITH ATTACHED CATPROCESS DATA ITEM 90
FIGURE 119: CMI RII APPLICATION WITH DROPPED PROCESS ELEMENT 91
FIGURE 120: LOADED CATPROCESS IN CATIA V5 92
FIGURE 121: CATIA SETTING FOR DISPLAYING RELATIONS IN THE STRUCTURE TREE 93
FIGURE 122: CATPART WITH DESIGN TABLE 93
FIGURE 123: SYNCHRONIZE DIALOG WITH CREATE DESIGN TABLE OPERATION 94
FIGURE 124: SYNCHRONIZE DIALOG WITH CREATION RESULT FROM TEAMCENTER 94
FIGURE 125: DESIGN TABLE OBJECT IN TEAMCENTER 95
FIGURE 126: EDIT DESIGN TABLE DIALOG IN CATIA V5 95
FIGURE 127: OPENED DESIGN TABLE FILE 96
FIGURE 128: KNOWLEDGE REPORT IN CATIA V5 96
FIGURE 129: CHANGED GEOMETRY IN CATIA V5 97
FIGURE 130: SUCCESS MESSAGE FROM TEAMCENTER 97
FIGURE 131: CATPART WITHOUT DESIGN TABLE 98
FIGURE 132: SYNCHRONIZE DIALOG BEFORE DROP OPERATION 98
FIGURE 133: SUCCESS DIALOG FROM TEAMCENTER 99
FIGURE 134: TOOLS→ OPTIONS DIALOG IN CATIA V5 99
FIGURE 135: CHOOSE MATRIX TO UPDATE DIALOG 101
FIGURE 136: CHOOSE MODEL TO UPDATE DIALOG 102
FIGURE 137: GENERAL PROCESS OF "PSEUDO REVISE" FOR CAD DATASETS 103
FIGURE 138: CATDUAV5 PARAMETER DIALOG 104
FIGURE 139: CLEANING METHOD SELECTION DIALOG 105
FIGURE 140: GLOBAL RESULTS DIALOG 106
FIGURE 141: REPRESENTATION FORMATS IN CATIA V5 (CATIA WORKBENCH) 107
FIGURE 142: REPRESENTATION FORMATS IN CATIA V5 108
FIGURE 143: SYNCHRONIZE DIALOG IN CATIA V5 108
FIGURE 144: MAPPING FILE IN TEAMCENTER 109
FIGURE 145: RECONNECT DIALOG IN CATIA V5 109
FIGURE 146: ASK USE MAPPING DIALOG IN CATIA V5 110
FIGURE 147: EXPORT LOCATION DIALOG IN CATIA V5 110
FIGURE 148: CMI MESSAGES DIALOG IN CATIA V5 111

CHAPTER 1

Overview

This chapter provides basic information about the *CATIA Teamcenter Interface* and lists some features of this application interface.

Introducing CMI (CATIA Teamcenter Interface)

The *CATIA Teamcenter Interface* (CMI RII) was developed by T-Systems as a high-end integration between the CAD system *CATIA V5* and the PDM system *Teamcenter*. With this interface it is possible to manage *CATIA V4* and *CATIA V5* models and assemblies in *Teamcenter* and *CATIA V5*.

CATIA V5 uses assemblies similar to *Teamcenter*. CMI RII makes a bidirectional mapping between the *Teamcenter* structure and the *CATIA V5* structure. So users have the full functionality of *Teamcenter* and *CATIA V5*.

CMI RII joins the advantages of CAD with PDM

The *CATIA Teamcenter Interface* combines the CAD Excellency of CATIA with the power of the PDM system Teamcenter. It provides the user with a more sophisticated way of working with CATIA by allowing the management of product structures and multiple level assembly structures within the PDM system.

The CATIA Teamcenter Interface (CMI RII) permits:

- Integration of CATIA data in workflow (e.g. release control);
- Management of CATIA data in vaults, without knowledge about the underlying file system;
- Updating concurrent engineering processes by different users;
- Distribution of CATIA data in a network;
- Simultaneous management of CATIA data and structures;
- Construction of part structures within Teamcenter;
- Modification of the position of the structures;
- Search for CATIA data by different attributes.

CMI Architecture

The following figure explains the architectural basics of the CATIA Teamcenter Interface (CMI RII).

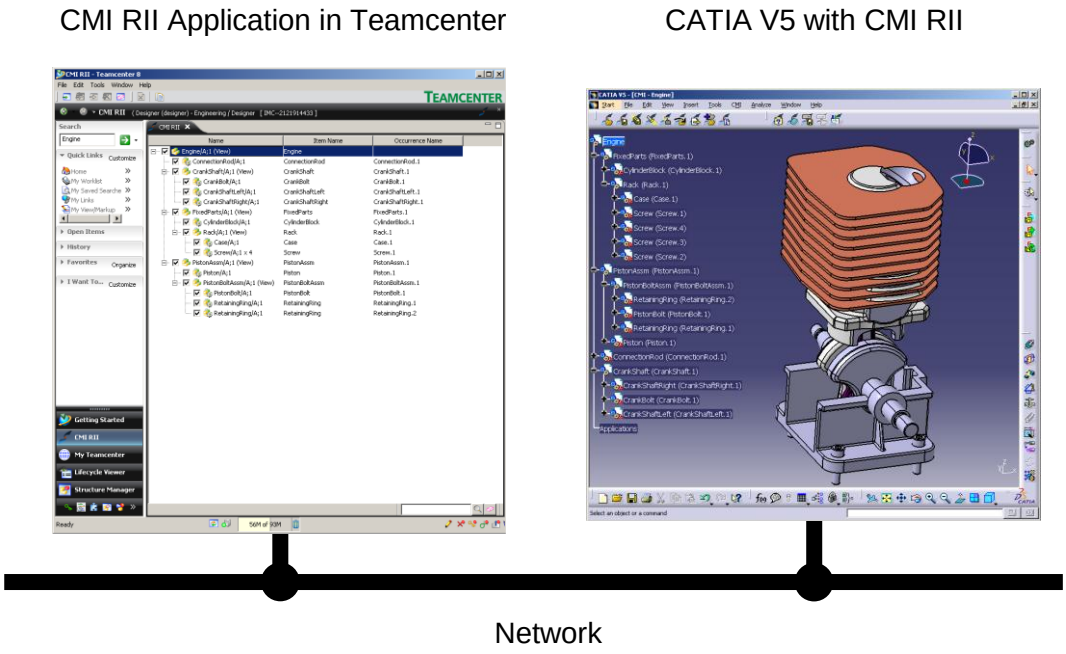

Figure 1: CATIA Teamcenter Interface architecture

The user can expand an assembly within the CMI RII application and send this assembly to CATIA V5. After changing geometries and/or positions in CATIA the user can update the assembly in Teamcenter.

The CMI RII application is not available with Teamcenter 2007. The main functionality can be used similar with the PSE application.

CHAPTER 2

Getting Started

This chapter describes how to start CATIA within the Teamcenter environment and also how to enable the CMI functionality within CATIA V5.

Assumptions

Some assumptions, for a better understanding of the descriptions and examples:

CATIA V5 should display the two CMI toolbars:



UNIX:
Start CATIA V5 with the command cmicatstart.sh

Windows:
Make sure you have set up the right environment (refer to the *CATIA Teamcenter Interface RII Installation Manual*). Launch CATIA V5 with the command:
CNEXT.exe -env CatiaCMIEnv -direnv "C:\<path to the CMIEnv>"

Starting Applications

Before working with CMI RII it is necessary to start the Teamcenter Rich Client, the Teamcenter user interface, and the CATIA V5.

For information on starting Teamcenter Rich Client see the Teamcenter Help Library – Getting Started with Teamcenter provided by Siemens PLM.

For information on starting the CATIA User Interface see the CATIA Solutions User's Guide.

It makes no difference if Teamcenter or CATIA is started first.

Enabling the CMI toolbar in CATIA V5

In CATIA V5, select the menu *View→Toolbars→CMI* and *View→Toolbars→CMI Advanced Tools*.

If the CMI toolbars are not in the list of toolbars, a problem with the installation may have occurred. In this case, contact the *administrator*. Information about this kind of problem can be found in the *CATIA Teamcenter Interface RII Installation Manual*.

CHAPTER 3

The CMI RII Application

This chapter introduces the CMI RII application with a general explanation and then by listing its functions. The goal of this chapter is to make the user familiar with this component. The CMI RII application functions will be explained in subsequent chapters.

The CMI RII application is not available with Teamcenter 2007. The main functionality can be used similar with the PSE application.

What is the CMI RII Application?

The CMI RII application is a Teamcenter application used to interactively prepare an assembly structure for sending to CATIA and to provide several manipulation facilities for the CMI commands found in CATIA. The entire data interchange between Teamcenter and CATIA is achieved via the CMI RII application.

CMI RII defines some new dataset types in Teamcenter that can be used to manage CATIA V5 files (CATPart, model, cgr, CATProduct, and CATDrawing). The management of CATIA V5 files is described in *Chapter 5*.

To start the CMI RII application use the standard Teamcenter start mechanism as shown in Figure 2.

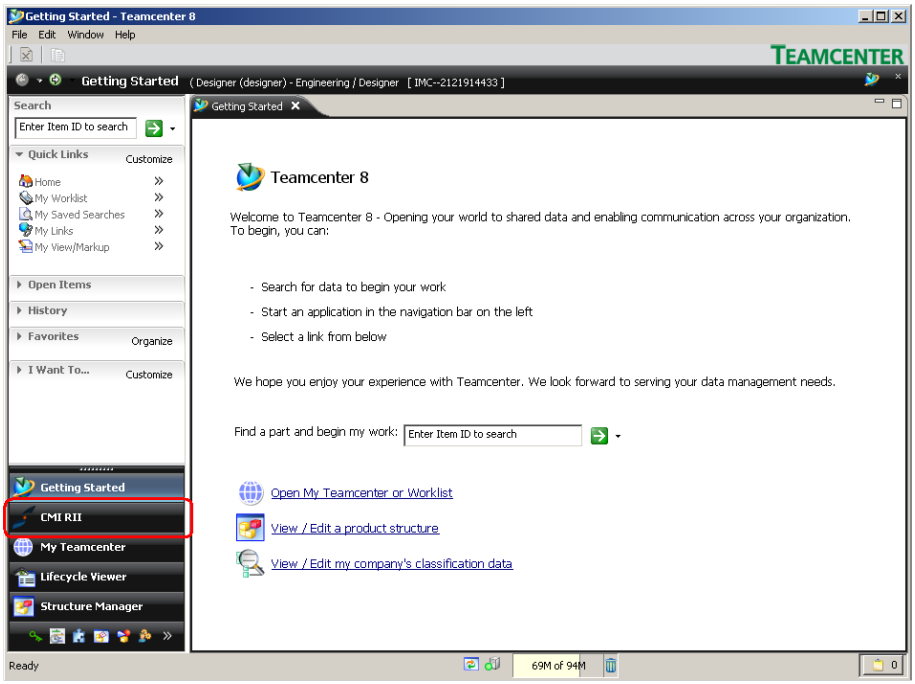
Getting Started - Teamcenter 8
File Edit Window Help
TEAMCENTER
Getting Started (Designer (designer) - Engineering / Designer [IMC--2121914433]
Search
Enter Item ID to search
Quick Links
Customize
Home
My Worklist
My Saved Searches
My Links
My View/Markup
Open Items
History
Favorites
Organize
I Want To...
Customize
Getting Started
CMI RII
My Teamcenter
Lifecycle Viewer
Structure Manager
Getting Started
Teamcenter 8
Welcome to Teamcenter 8 - Opening your world to shared data and enabling communication across your organization.
To begin, you can:
- Search for data to begin your work
- Start an application in the navigation bar on the left
- Select a link from below
We hope you enjoy your experience with Teamcenter. We look forward to serving your data management needs.
Find a part and begin my work:
Enter Item ID to search
Open My Teamcenter or Worklist
View / Edit a product structure
View / Edit my company's classification data
Ready
69M of 94M

Figure 2: Teamcenter Rich Client start window

A window with the CMI RII application will appear after logging in into the PDM system Teamcenter (see Figure 3).

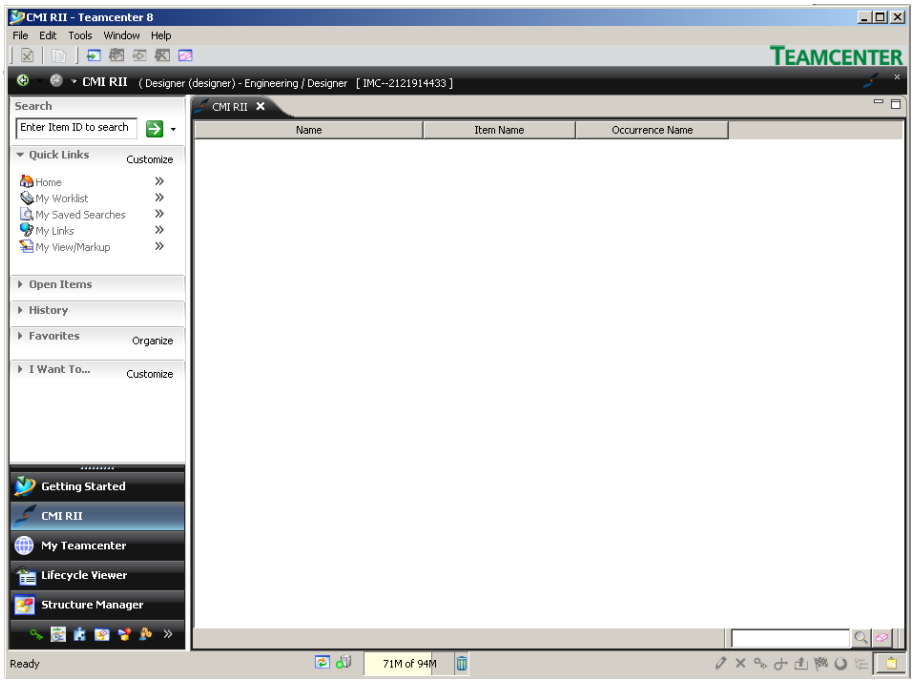

Figure 3: CMI RII application window

The CMI RII Application Menu

Below the CMI RII application menu items will be described.

Figure 4: CMI RII application menu items

Menu item File



Figure 5: CMI RII application menu 'File'

The menu item *File→Close* will close the CMI RII application.

The menu item *File→Exit* will exit the Rich Client application.

Menu item Edit



Figure 6: CMI RII application menu 'Edit'

The menu item *Edit→User Setting…* will open the User Setting dialog of the Rich Client application.

The menu item *Edit→Options…* will open the Preferences dialog of the Rich Client application.

The CMI RII options are shown on a separate tabular (see Figure 7).

Send To CATIA	
Send drawings to CATIA?	Checked if drawing files (CATDrawing) should be sent to CATIA.
Send cgms to CATIA?	Checked if cgm files should be sent to CATIA.
Send visualization files to CATIA?	Checked if visualization files should be sent to CATIA.
Send analysis files to CATIA?	Checked if analysis files should be sent to CATIA.
Transfer CGR files To CATIA	
No	No CGR are sent to CATIA
Only CGR	If a read-only CATPart / V4 model (the file is not checked out by the session user) has a corresponding cgr file, CMI RII transfers only the CGR file to CATIA. For a writable CATPart / V4 model (the file is checked out) CMI RII transfers the CATPart / V4 model file, too.
CGR + geometry	CGR and geometry files are sent to CATIA
Work with CATIA Version	
V5	work with CATIA V5
V4	work with CATIA V4
Read Mode for Read From CATIA	
Use Standard Read Mode	Send the visible (expanded) children to CATIA.
Use DMU Read Mode	Send the DMU marked (checked) children to CATIA.
Use Automatic Read Mode	Use DMU Read Mode if the Viewer is active, use Standard Read Mode if the Viewer is not active.
Newstuff Setting	
It can be defined for new Items and Datasets to which folder they should be linked after create.	
Newstuff Folder	The default Newstuff Folder will be used.
Folder Selection	The link folder is chosen by the user (It is not possible to create a new folder in this dialog).
None	Do not link new objects to a folder.
DMU Settings	
DMU Clearance [mm]	Define the DMU Clearance for the Neighbourhood search and Volume search functions.

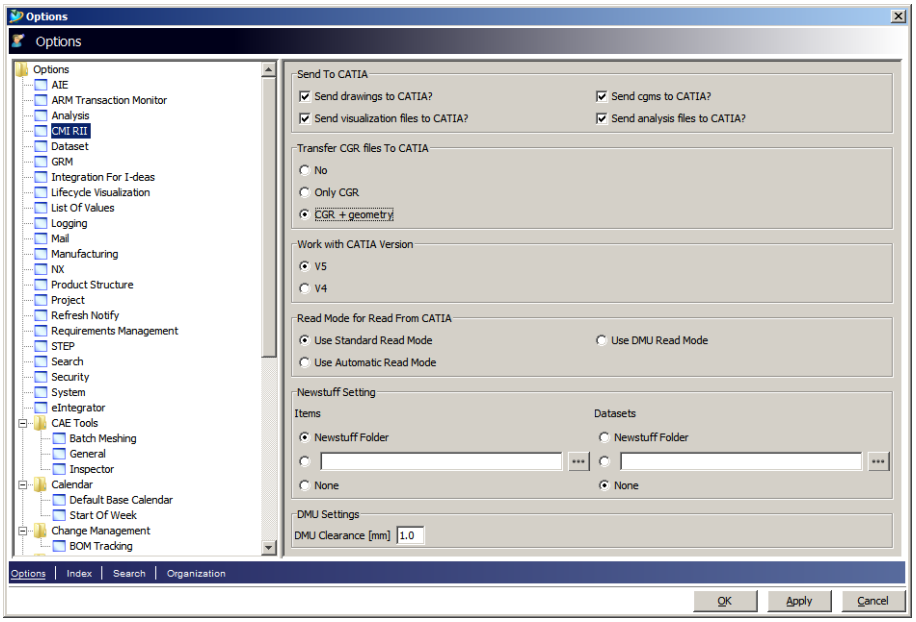

Figure 7: The CMI RII options dialog

Menu item Tools

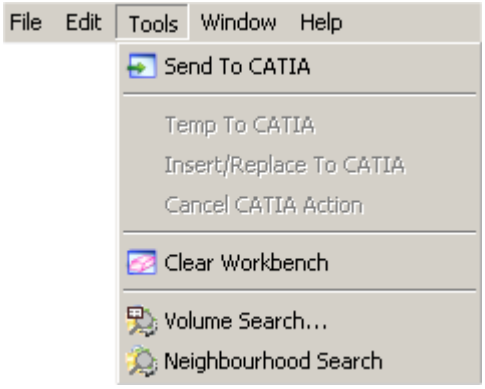

Figure 8: CMI RII application menu 'Tools'

The menu item *Tools→Send To CATIA* starts the *Read To CATIA* action and will read the CMI RII application content to the CATIA.

The menu item *Tools→Temp To CATIA* starts the *Add Temp To CATIA* action and will read the temporary added items to the CATIA. This menu item is only usable if the *Add Temp* action is started from the CATIA.

The menu item *Tools→Insert/Replace To CATIA* starts the *Insert/Replace To CATIA* action and will read the queried items to the CATIA. This menu item is only usable if the *Insert from Teamcenter* action or the *Replace from Teamcenter* action is started from the CATIA.

The menu item *Tools→Cancel CATIA Action* cancels actions which are started from CATIA (e.g. *SaveAs* and *AddTemp*). This menu item is only usable if an action is started from the CATIA (e.g. *SaveAs* and *AddTemp*).

The menu item *Tools→Clear Workbench* removes all items from the CMI RII application window.

The menu item *Tools→Volume Search …* starts the Volume Search (see CMI RII→ Volume Search page 15).

The menu item *Tools→Neighbourhood Search* starts the Neighbourhood Search (see CMI RII→ Neighbourhood search page 17).

Menu item Window

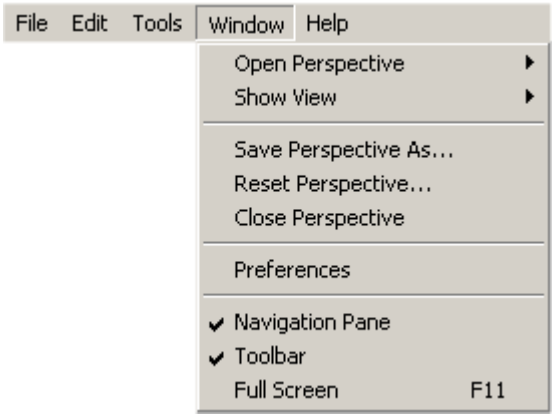

Figure 9: CMI RII application menu 'Window'

The menu item *Window* includes the standard menu items provided by the Teamcenter Rich Client application.

Menu item Help

Figure 10: CMI RII application menu 'Help'

The menu item *Help* points to the standard application Help provided by the Teamcenter Rich Client application.

The menu item *Help→About* opens the About dialog.

The About dialog informs about the actual CMI RII application (see Figure 11).

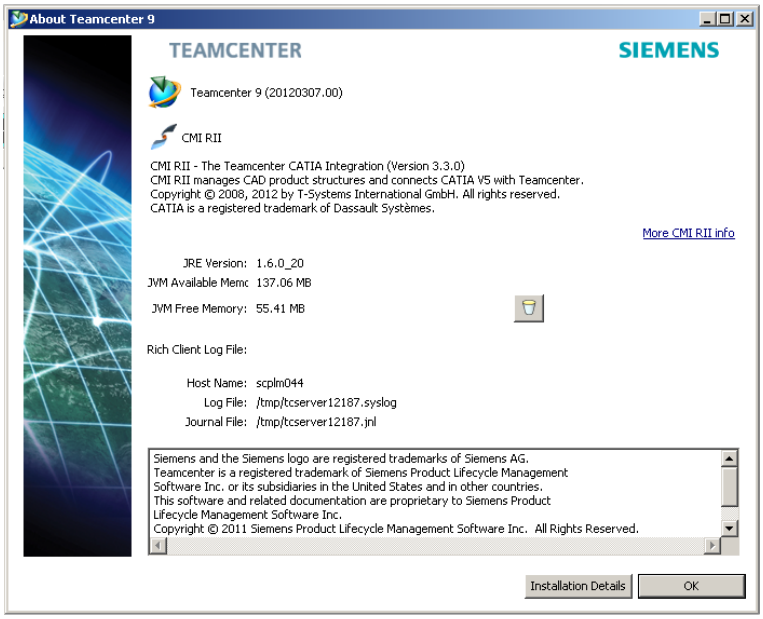
About Teamcenter 9
TEAMCENTER
SIEMENS
Teamcenter 9 (20120307.00)
CMI RII
CMI RII - The Teamcenter CATIA Integration (Version 3.3.0)
CMI RII manages CAD product structures and connects CATIA V5 with Teamcenter.
Copyright © 2008, 2012 by T-Systems International GmbH. All rights reserved.
CATIA is a registered trademark of Dassault Systèmes.
More CMI RII info
JRE Version: 1.6.0_20
JVM Available Memc 137.06 MB
JVM Free Memory: 55.41 MB
Rich Client Log File:
Host Name: scplm044
Log File: /tmp/tcserver12187.syslog
Journal File: /tmp/tcserver12187.jnl
Siemens and the Siemens logo are registered trademarks of Siemens AG.
Teamcenter is a registered trademark of Siemens Product Lifecycle Management
Software Inc. or its subsidiaries in the United States and in other countries.
This software and related documentation are proprietary to Siemens Product
Lifecycle Management Software Inc.
Copyright © 2011 Siemens Product Lifecycle Management Software Inc. All Rights Reserved.
Installation Details
OK

Figure 11: CMI RII application About dialog.

Pop-Up menus of CMI RII Items

If you select an Item and *drop it into*, or *Send it to* the CMI RII application, a BOMLine will be created dynamically. Items which will be handled as geometry items are represented by , structure elements are represented by .

If you select a Drawing dataset and *drop it into*, or *Send it to* the CMI RII application a dataset is shown in the CMI RII application. The Drawing dataset is represented by .

If you select a cgm dataset and *drop it into*, or *Send it to* the CMI RII application a dataset is shown in the CMI RII application. The cgm dataset is represented by .

Items in the CMI RII Application

On the Item objects displayed in the CMI RII application window there are the following functions available:

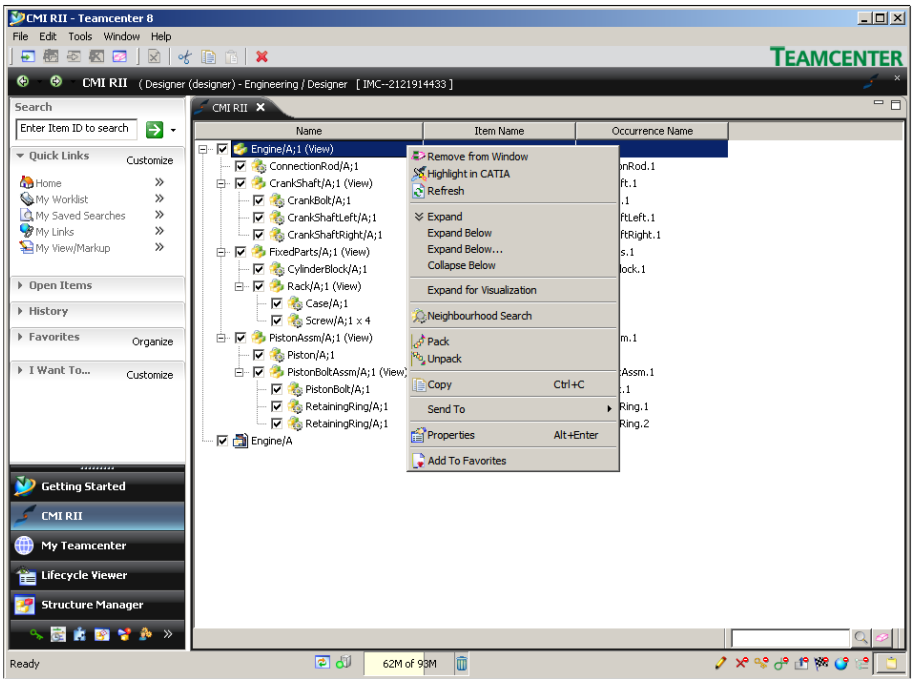

Figure 12: Context menu on a Line in the CMI RII application

The *Remove from Window* command only works on selected top level elements.

Remove from Window	Removes the selected object from the CMI RII application window.
Highlight in CATIA	Highlights the selected objects in CATIA.
Refresh	Refreshes the selected object from the database.
Expand	Expands the object one level.
Expand Below	Expands the object multiple levels.
Expand Below…	Expands the object multiple levels, a dialog will be displayed where the level number can be defined.
Collapse Below	Collapses all children.
Expand for Visualization	Expands the object multiple levels with the visualization option. When a visualization model is found the expand stops and only the Visualization model will be sent to

	CATIA.
Neighbourhood Search	Starts the Neighbourhood Search for the selected items.
Pack Unpack	Pack the selected lines. Unpack the selected lines.
Copy	Copies the selected object to the clipboard.
Send To	Sends the selected object to another Teamcenter application.
Properties	Displays the Teamcenter properties dialog.
Add To Favorites	Adds the selected object to the favorites list on the left.

Models in the CMI RII Application

On the Dataset (CATDrawing, Auxiliary geometries, CMIArchives and cgm) objects displayed in the CMI RII application window there are the following functions available:

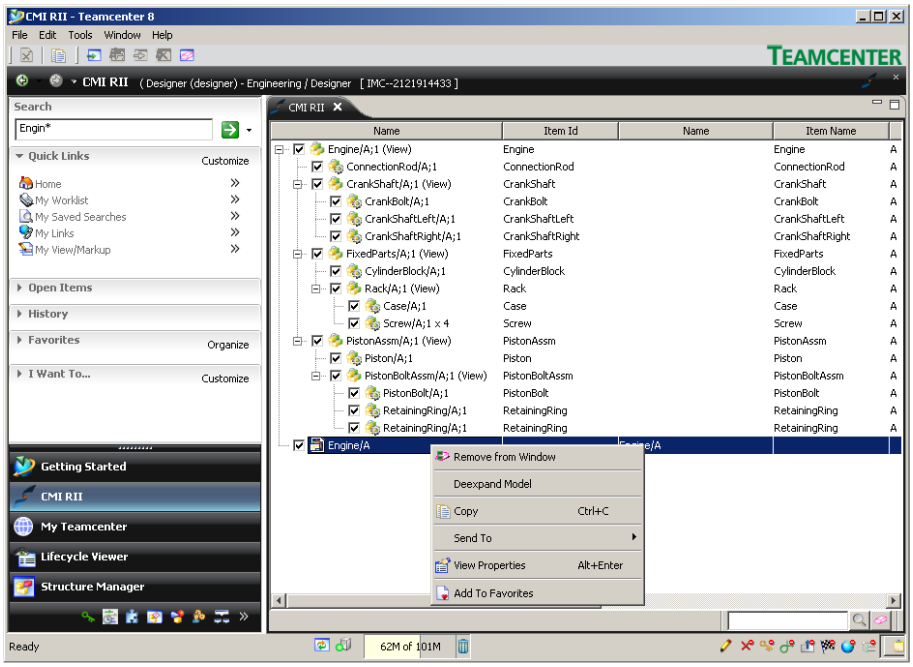

Figure 13: Context menu on a Dataset in the CMI RII application

Remove from Window	Removes the selected object from the CMI RII application window.
Deexpand Model	Deexpands the selected objects from the CMI RII application window.
Copy	Copies the selected object to the clipboard.
Send To	Sends the selected object to another Teamcenter application.
View Properties	Displays the Teamcenter properties dialog.
Add To Favorites	Adds the selected object to the favorites list on the left.

Single Model handling in the CMI RII Application

CATDrawing, CATAnalysis and cgm Models can be separately expanded in the CMI RII application if the global "Send To CATIA" preferences are not checked (see Figure 14).

Figure 14:CMI RII Send To CATIA Preferences

If the *"Send drawings to CATIA?", "Send cgms to CATIA?"* or *"Send analysis files to CATIA?"* preference is not selected, these dataset types can be expanded in the CMI RII application window with the corresponding context menu.

The context menus (see Figure 15) are not visible, if the global preferences (see Figure 14) are checked.

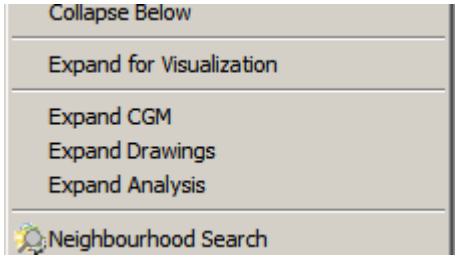

Figure 15:Extended context menu on a Line in the CMI RII application

The expanded Model will be loaded to CATIA if it is visible and checked.

The model can be deexpanded with the *Deexpand Model* command in the context menu (see Figure 16), or if the parent node is normally expanded.

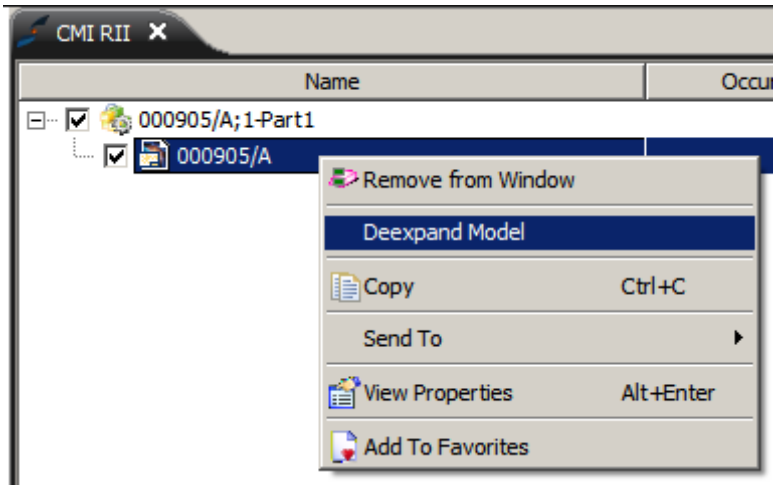

Figure 16:Expanded model with context menu

Enhancements in the Structure Manager Application

This section introduces the enhancements in the Structure Manager application by listing its functions.

CMI RII Menu bar in the Structure Manager Application

The Structure Manager application menu is enhanced by a new CMI RII menu item (see Figure 17).

Figure 17: Structure Manager application with CMI RII menu

Menu item CMI RII

The menu item CMI RII (see Figure 18) contains three commands to send data to CATIA. The next three commands are used to send data which was requested by CATIA or to cancel the CATIA action. The last two commands are used to search in the geometry.

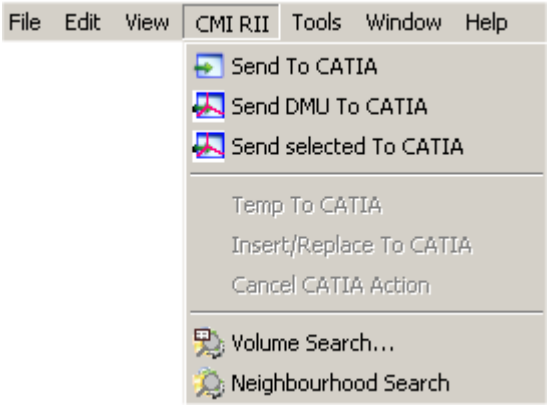

Figure 18: Structure Manager menu 'CMI RII'

CMI RII→Send To CATIA

The menu item *CMI RII→Send To CATIA* will send the expanded Structure Manager content to CATIA.

The *Send To CATIA* command will send the content of the current active Structure Manager application window to CATIA. Only expanded structures will be sent to CATIA. Unexpanded structures will not be sent to CATIA.

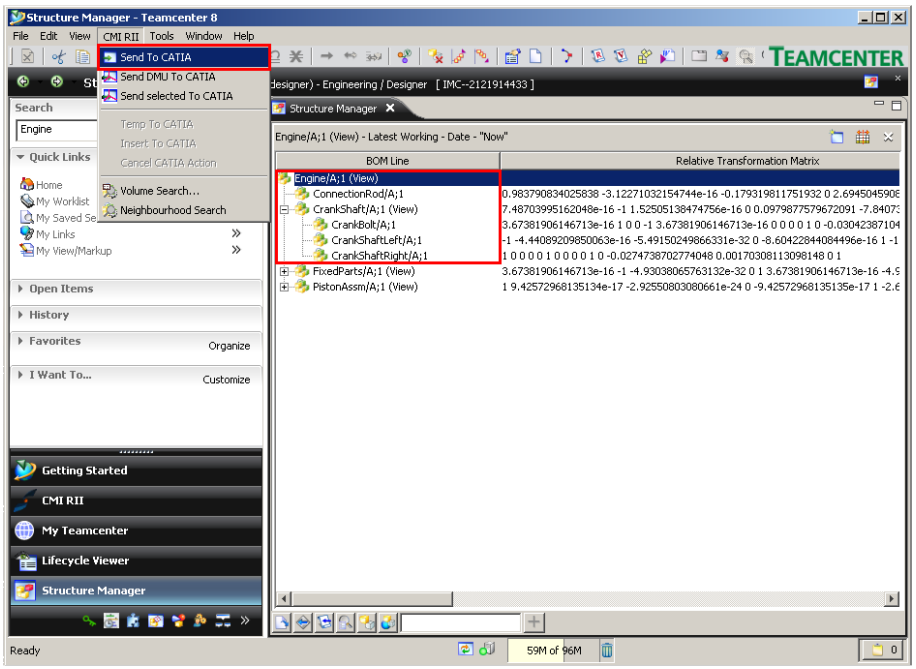

Figure 19: Structure Manager application with Send To CATIA command

Only the expanded structures from the example structure in Figure 19 will be sent to CATIA. The items *FixedParts* and *PistonComplete* are not expanded and the substructures of these items are not sent to CATIA.

CMI RII→Send DMU To CATIA

The menu item *CMI RII→Send DMU To CATIA* will send the DMU 'marked' Structure Manager content to CATIA.

The *Send DMU To CATIA* command will send the checked content (checkboxes are presented by the viewer functionality) of the current active Structure Manager application window to CATIA. Only checked structures will be sent to CATIA. Unchecked structures will not be sent to CATIA.

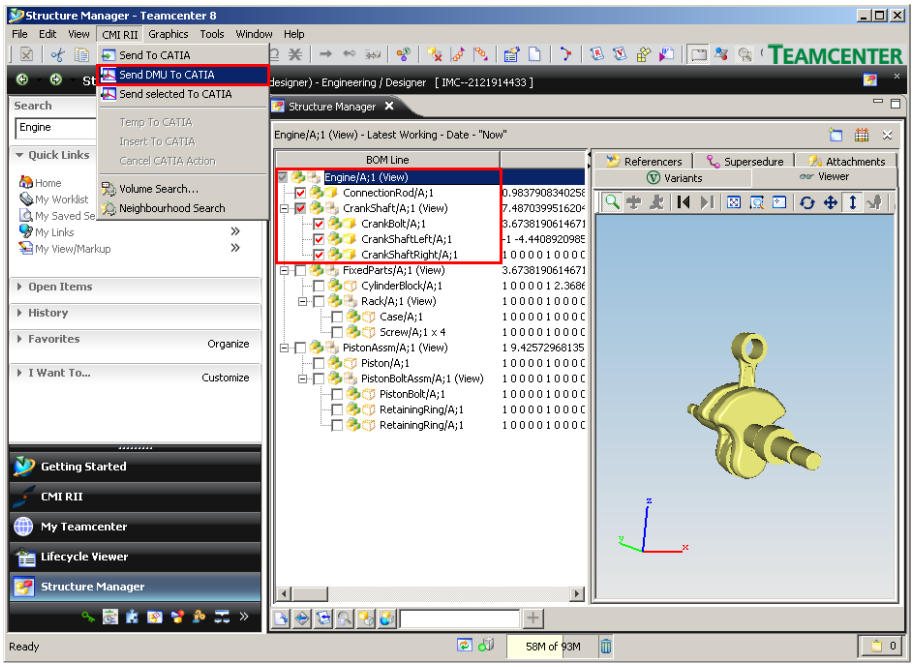

Figure 20: Structure Manager application with Send DMU To CATIA command

Only the checked items from the example structure in Figure 20 will be sent to CATIA. The unchecked structures *FixedParts* and *PistonComplete* will not be sent to CATIA.

CMI RII→Send Selected To CATIA

The menu item *CMI RII→Send Selected To CATIA* will send the selected objects of the expanded Structure Manager content to CATIA.

The *Send Selected To CATIA* command will send the selected objects of the current active Structure Manager application window to CATIA.

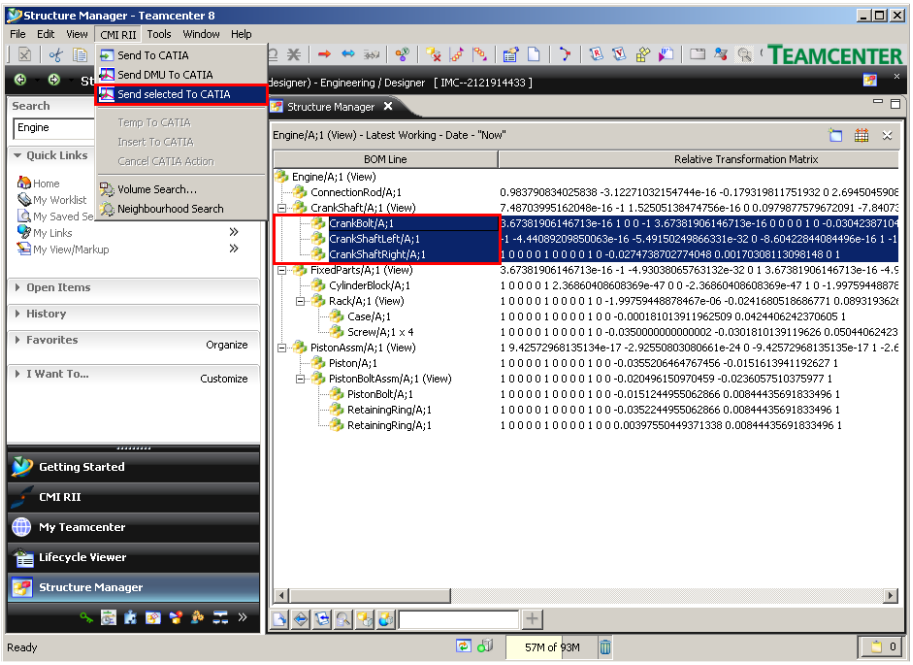

Figure 21: Structure Manager application with Send Selected To CATIA command

Only the selected objects of the example structure in Figure 21 will be sent to CATIA. The items *CrankBolt, CrankShaftLeft* and *CrankShaftRight* are selected and will be sent to CATIA.

CMI RII→Temp To CATIA, CMI RII→Insert/Replace To CATIA, CMI RII→Cancel CATIA Action

For details see Chapter *Working with CATIA V5*.

CMI RII→Volume Search...

The menu item *CMI RII→Volume Search...* provides a volume search in the Structure Manager application.

The search is based on the bounding box information stored from CATIA in Teamcenter.

The administrator needs to `set CMI_CALC_BBOX=ON` in the CATIA environment in order to enable the *Bounding Box* functionality.

With `set CMI_CALC_BBOX_FOR_IGNOREDCHILDREN=ON` in the CATIA environment the *Bounding Box* functionality for ignored children (not existing in Teamcenter) can be switched on. For details please see the customization manual.

Optional: `CMI_BOUNDING_BOX_EXCLUDE_HIDDEN=ON`

Select a volume by defining 2 points which define a cuboid in the global coordinate system as search criteria (see Figure 22).

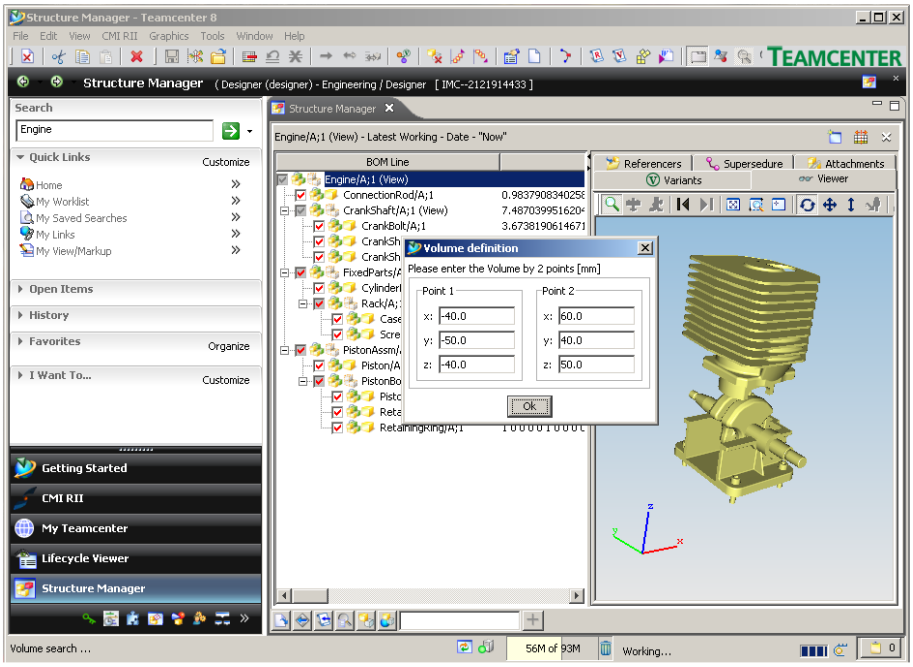

Figure 22: Volume definition Dialog

The DMU clearance can be set in the CMI RII options panel (see Figure 23).

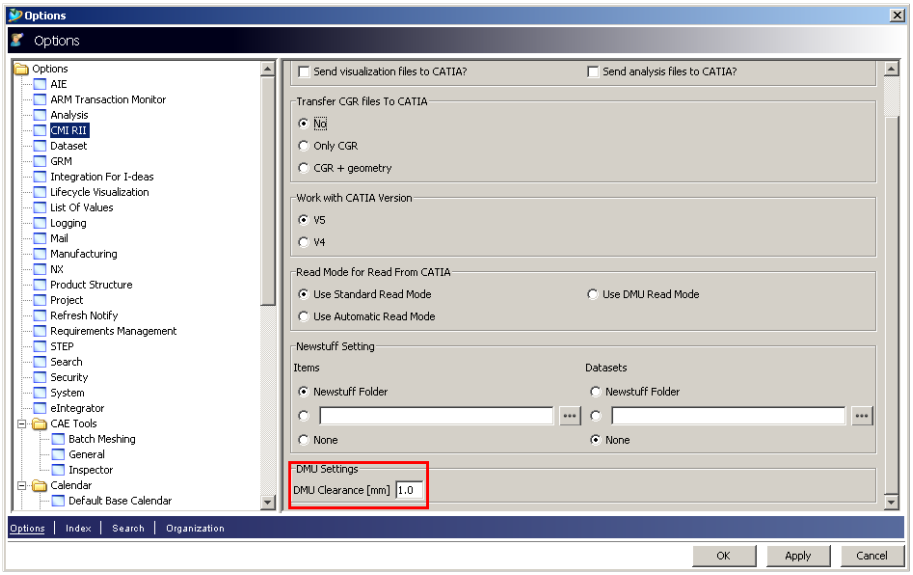

Figure 23: CMI RII preferences panel

After defining the search criteria the structure is searched for bounding box information which is stored in the following dataset types:

- CMI2Part, CMI2Model, CMI2Cgr, CMI2Rep,
- CMI2AuxPart, CMI2AuxModel, CMI2AuxCgr, and CMI2AuxRep, CMIArchive

The *Volume Search* and the *Neighbourhood Search* command computes the result and selects the lines in the Structure Manager. This result can then be sent to CATIA V5 using the command *Send selected To CATIA* (see Figure 24).

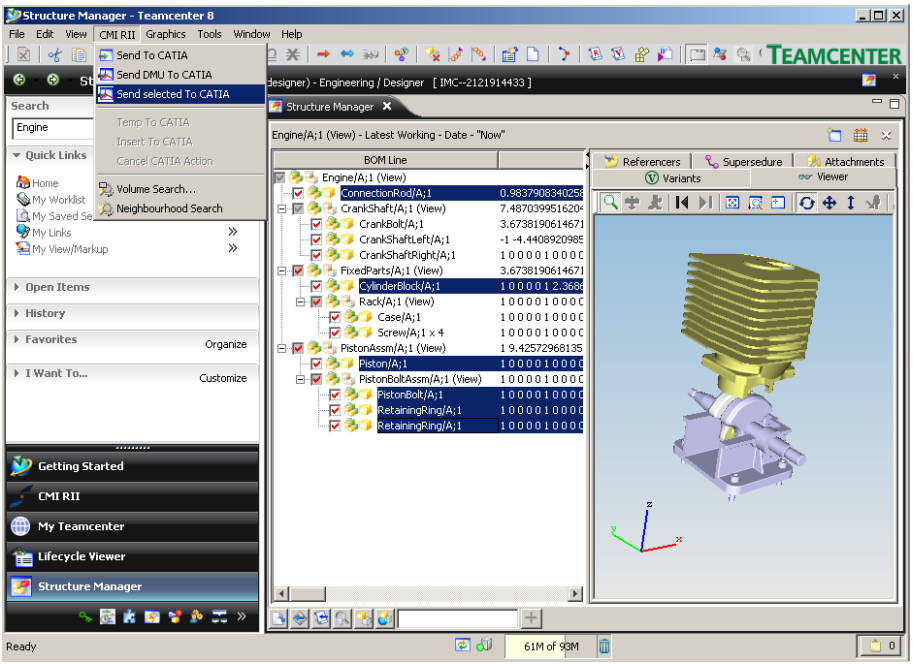

Figure 24: Selected result lines in Structure Manager

CMI RII→Neighbourhood search

The menu item *CMI RII→Neighbourhood search* provides a neighbourhood search in the Structure Manager application.

The search is based on the bounding box information stored from CATIA in Teamcenter.

The administrator needs to set `CMI_CALC_BBOX=ON` in the CATIA environment in order to enable the *Bounding Box* functionality.

With `set CMI_CALC_BBOX_FOR_IGNOREDCHILDREN=ON` in the CATIA environment the *Bounding Box* functionality for ignored children (not existing in Teamcenter) can be switched on. For details please see the customization manual.

Optional: `CMI_BOUNDING_BOX_EXCLUDE_HIDDEN=ON`

Select one or more lines in the Structure Manager application. The bounding boxes of the selected lines (see Figure 25) are used as search criteria.

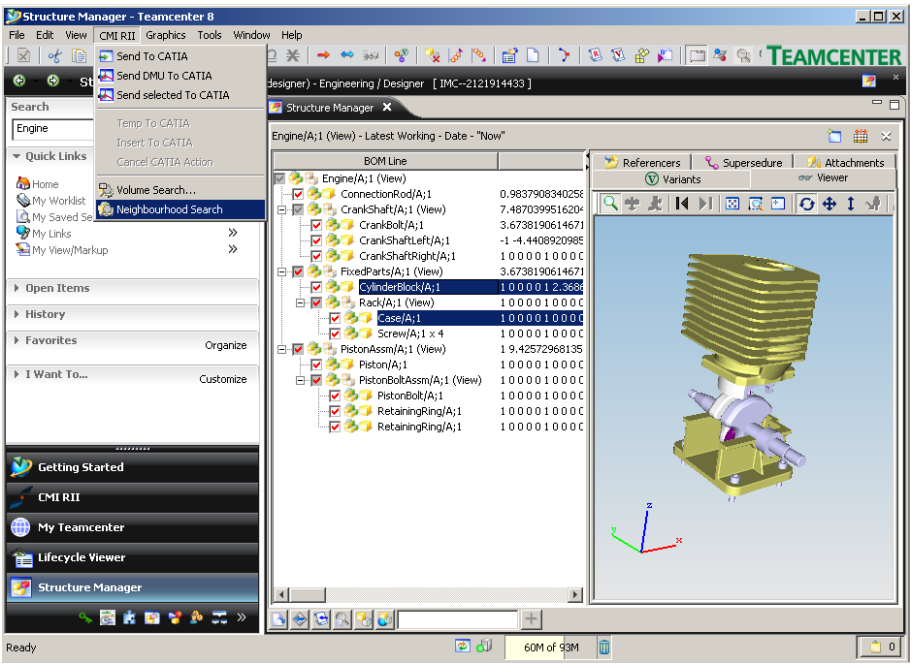

Figure 25: Neighbourhood Search

The search results are selected in the Structure Manager application and can be sent to CATIA V5 using the command *Send selected To CATIA* (see Figure 24)

Highlight in CATIA

This action is only available with Teamcenter 2007 in this menu. For details see Chapter *Highlighting an Item in CATIA* on page 44.

Enhancements in the Multi-Structure Manager Application

This section introduces the enhancements in the Multi-Structure Manager application by listing its functions.

CMI RII Menu bar in the Multi-Structure Manager Application

The Multi-Structure Manager application menu is enhanced by a new CMI RII menu item (see Figure 26).

Figure 26: Multi-Structure Manager application with CMI RII menu

Menu item CMI RII

The menu item CMI RII (see Figure 27) contains two commands to send data to CATIA. The next three commands are used to send data which was requested by CATIA or to cancel the CATIA action.

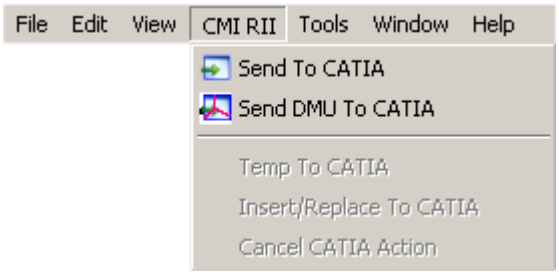

Figure 27: Multi-Structure Manager menu 'CMI RII'

CMI RII→Send To CATIA

The menu item *CMI RII→Send To CATIA* will send the expanded Multi-Structure Manager content to CATIA.

The *Send To CATIA* command will send the content of the current active Multi-Structure Manager application window to CATIA. Only expanded structures will be sent to CATIA. Unexpanded structures will not be sent to CATIA.

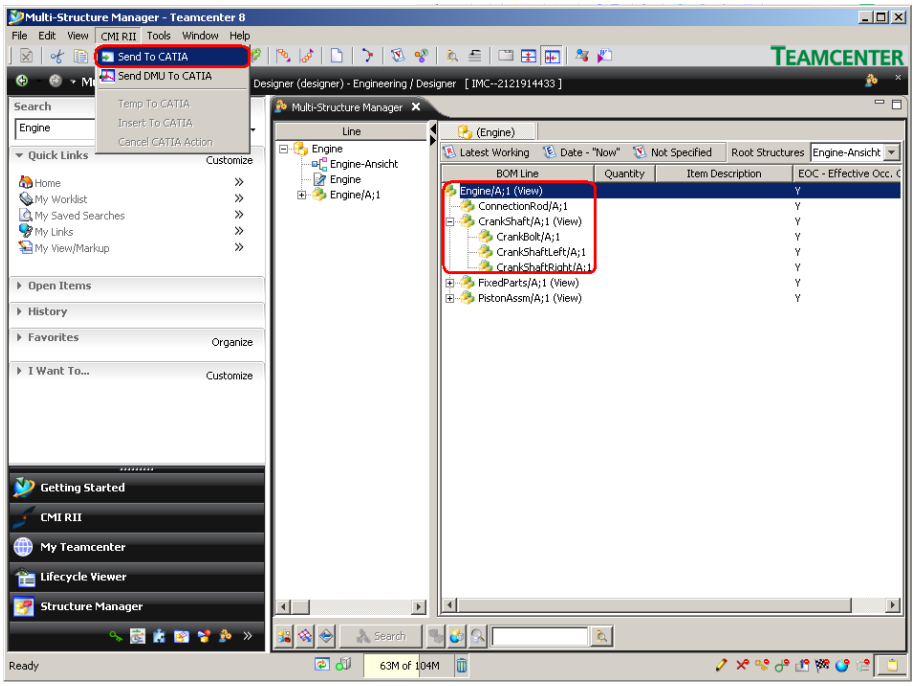

Figure 28: Multi-Structure Manager application with Send To CATIA command

Only the expanded structures from the example structure in Figure 28 will be sent to CATIA. The items *FixedParts* and *PistonComplete* are not expanded and the substructures of these items are not sent to CATIA.

CMI RII→Send DMU To CATIA

The menu item *CMI RII→Send DMU To CATIA* will send the DMU 'marked' Multi-Structure Manager content to CATIA.

The *Send DMU To CATIA* command will send the checked content (checkboxes are presented by the viewer functionality) of the current active Multi-Structure Manager application window to CATIA. Only checked structures will be sent to CATIA. Unchecked structures will not be sent to CATIA.

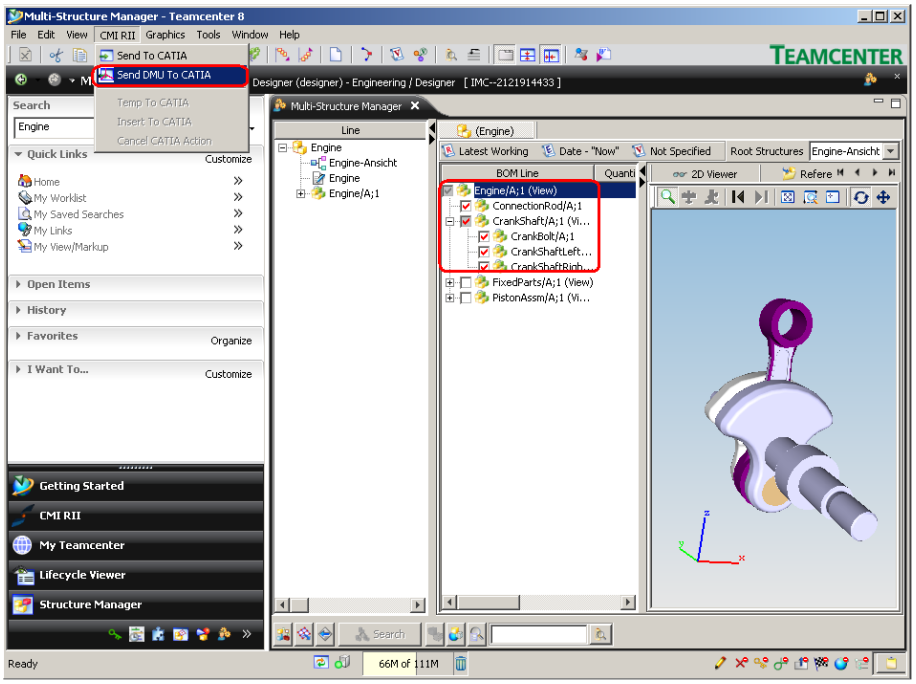

Figure 29: Multi-Structure Manager application with Send DMU To CATIA command

Only the checked items from the example structure in Figure 29 will be sent to CATIA. The unchecked structures *FixedParts* and *PistonComplete* will not be sent to CATIA.

CMI RII→Temp To CATIA, CMI RII→Insert/Replace To CATIA, CMI RII→Cancel CATIA Action

For details see Chapter *Working with CATIA V5*.

Highlight in CATIA

This action is only available with Teamcenter 2007 in this menu. For details see Chapter *Highlighting an Item in CATIA* on page 44.

Enhancements in the Manufacturing Process Planner Application

This section introduces the enhancements in the Manufacturing Process Planner application by listing its functions.

CMI RII Menu bar in the Manufacturing Process Planner Application

The Manufacturing Process Planner application menu is enhanced by a new CMI RII menu item (see Figure 30).

Figure 30: Manufacturing Process Planner application with CMI RII menu

Menu item CMI RII

The menu item CMI RII (see Figure 31) contains two commands to send data to CATIA. The next three commands are used to send data which was requested by CATIA or to cancel the CATIA action.

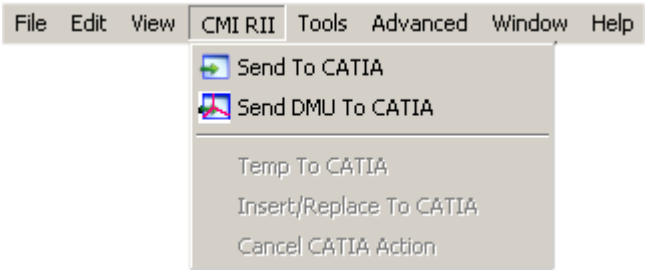

Figure 31: Manufacturing Process Planner menu 'CMI RII'

CMI RII→Send To CATIA

The menu item *CMI RII→Send To CATIA* will send the expanded Manufacturing Process Planner content to CATIA.

The *Send To CATIA* command will send the content of the current active Manufacturing Process Planner application window to CATIA. Only expanded structures will be sent to CATIA. Unexpanded structures will not be sent to CATIA.

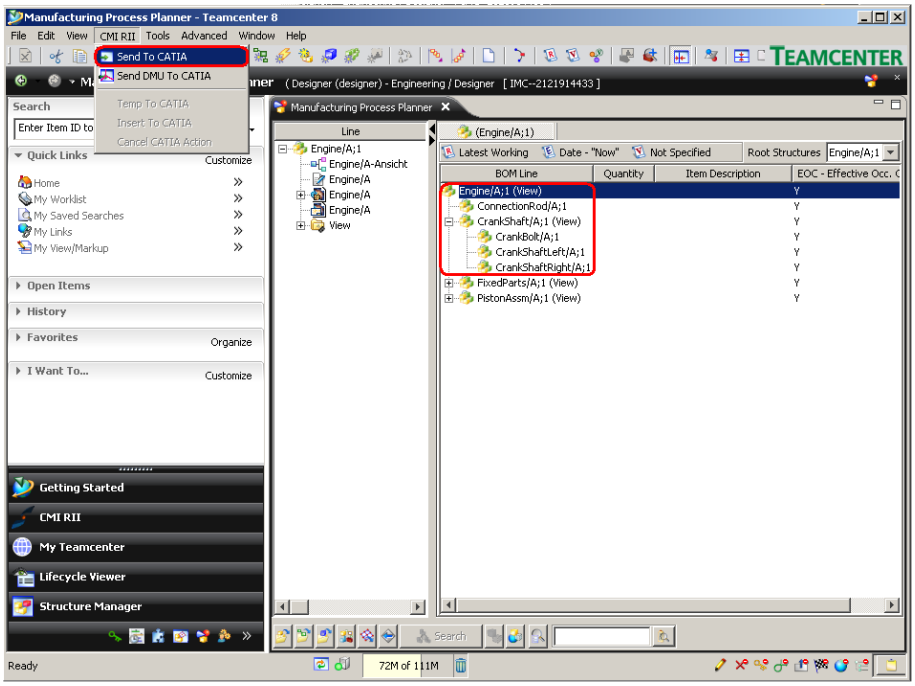

Figure 32: Manufacturing Process Planner application with Send To CATIA command

Only the expanded structures from the example structure in Figure 32 will be sent to CATIA. The items *FixedParts* and *PistonComplete* are not expanded and the substructures of these items are not sent to CATIA.

CMI RII→Send DMU To CATIA

The menu item *CMI RII→Send DMU To CATIA* will send the DMU 'marked' Manufacturing Process Planner content to CATIA.

The *Send DMU To CATIA* command will send the checked content (checkboxes are presented by the viewer functionality) of the current active Manufacturing Process Planner application window to CATIA. Only checked structures will be sent to CATIA. Unchecked structures will not be sent to CATIA.

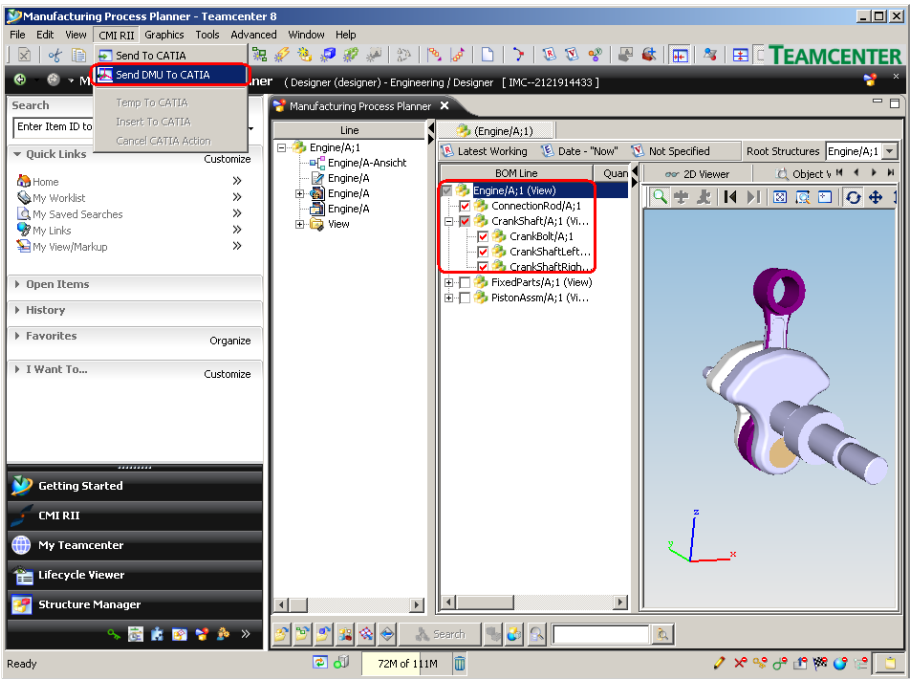

Figure 33: Manufacturing Process Planner application with Send DMU To CATIA command

Only the checked items from the example structure in Figure 33 will be sent to CATIA. The unchecked structures *FixedParts* and *PistonComplete* will not be sent to CATIA.

CMI RII→Temp To CATIA, CMI RII→Insert/Replace To CATIA, CMI RII→Cancel CATIA Action

For details see Chapter *Working with CATIA V5*.

Highlight in CATIA

This action is only available with Teamcenter 2007 in this menu. For details see Chapter *Highlighting an Item in CATIA* on page 44.

Enhancements in the My Teamcenter Application

This section introduces the enhancements in the My Teamcenter application by listing its functions.

CMI RII Menu bar in the My Teamcenter Application

The My Teamcenter application menu is enhanced by a new CMI RII menu item (see Figure 34).

Figure 34: My Teamcenter application with CMI RII menu

Menu item File

The Menu item File (see Figure 35) contains new types “CATIA BOM Part Item”, “CATIA AUX Part Dataset”, “CATIA Product Item”, and “CATIA Drawing Dataset” in the sub menu “New”.

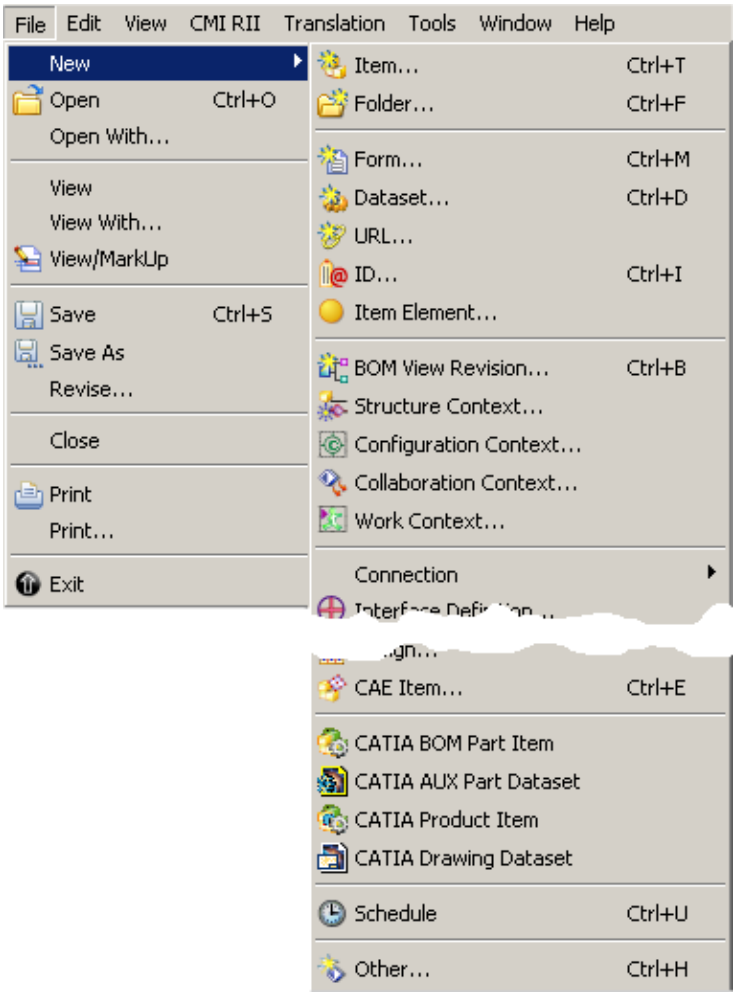

Figure 35: My Teamcenter menu ‘File’

File→New→CATIA BOM Part Item

Please see the description of the action *CMI RII→Create→CATIA BOM Part Item* on page 32.

File→New→CATIA AUX Part Dataset

Please see the description of the action *CMI RII→Create→CATIA AUX Part Dataset* on page 33.

File→New→CATIA Product Item

Please see the description of the action *CMI RII→Create→CATIA Product Item* on page 34.

File→New→CATIA Drawing Dataset

Please see the description of the action *CMI RII→Create→CATIA Drawing Dataset* on page 34.

Menu item CMI RII

The Menu item CMI RII (see Figure 36) contains one command to send data to CATIA. The next three commands are used to send data which was requested by CATIA or to cancel the CATIA action.

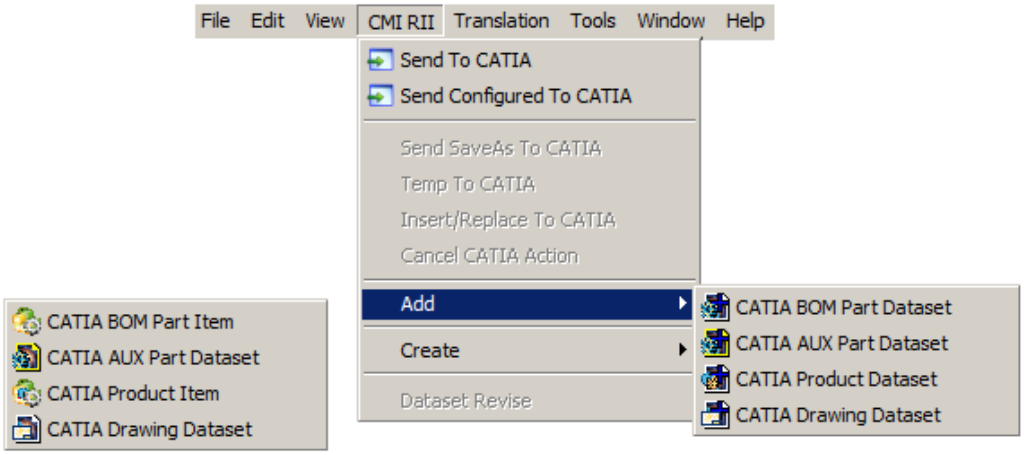

Figure 36: My Teamcenter menu 'CMI RII'

CMI RII→Send To CATIA

The menu item *CMI RII→Send To CATIA* will send the selected objects in My Teamcenter to CATIA.

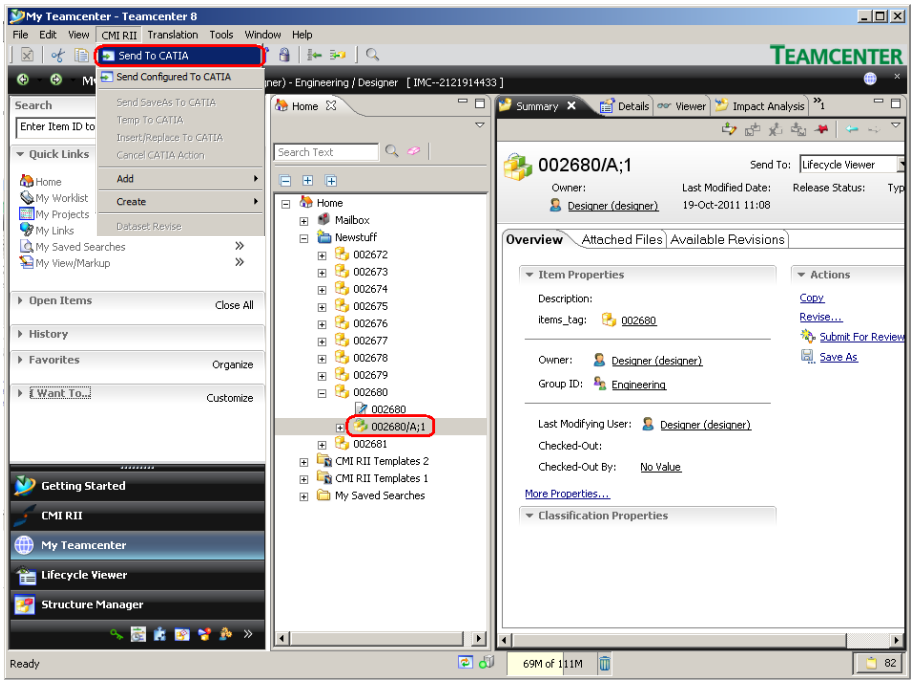

Figure 37: My Teamcenter application

The *Send To CATIA* command will send the selected objects (see Figure 37) of the current active My Teamcenter application window to CATIA. Only datasets for CATDrawing, cgms or auxiliary geometry and Item Revisions with BOM geometry are supported.

CMI RII→Send Configured To CATIA

The menu item *CMI RII→Send Configured To CATIA* will send the selected Item Revision from My Teamcenter with the chosen Revision Rule and Variant to CATIA.

Select the Item Revision and use the *CMI RII→Send Configured To CATIA* command.

A dialog will be opened (see Figure 38). In the dialog you can select the Revision Rule and the Variant (StoredOptionSet or VariantRule) for the selected Item Revision. If no Variant is found the Variant option is disabled.

After clicking the OK button the expand is performed and the structure is sent to CATIA.

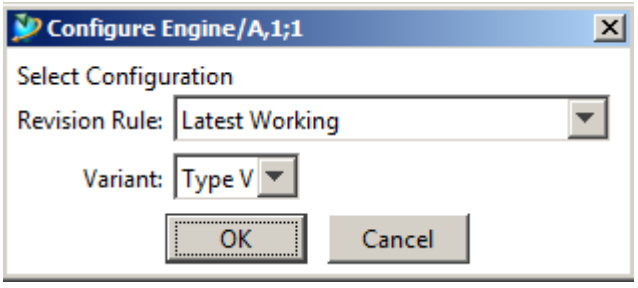

Figure 38: Send Configured To CATIA dialog

CMI RII→Send SaveAs To CATIA

The menu item *CMI RII→Send SaveAs To CATIA* will send the selected My Teamcenter object to CATIA.

Design or load your CATPart, CATDrawing or cgm in a separate window in CATIA.

In CATIA V5 select the *Save As in Teamcenter* icon .

Select an item in the My Teamcenter application in Teamcenter.

In order to *Save As in Teamcenter* with a CATDrawing, select the 'new' CATDrawing dataset to be overwritten in the My Teamcenter application in Teamcenter. The CATDrawing active in CATIA V5 will then overwrite its content.

In order to *Save As in Teamcenter* with a cgm, select the 'new' cgm dataset to be overwritten in the My Teamcenter application in Teamcenter. The cgm active in CATIA V5 will then overwrite its content.

In order to *Save As in Teamcenter* with a BOM CATPart, select the 'new' item to be overwritten in the My Teamcenter application in Teamcenter. The CATPart active in CATIA V5 will then overwrite its content.

In order to *Save As in Teamcenter* with a no BOM CATPart, select the 'new' auxiliary dataset to be overwritten in the My Teamcenter application in Teamcenter. The CATPart active in CATIA V5 will then overwrite its content.

Select the menu item *CMI RII→Send SaveAs To CATIA*.

Please take care when you 'Save As' a CATPart which is used in a CATProduct - a reference to the CATPart is stored within the parent CATProduct. Make sure that the new CATPart is compatible.

CMI RII→Temp To CATIA

The menu item *CMI RII→Temp To CATIA* will send the selected My Teamcenter object to CATIA.

In CATIA V5, go to *Tools→Options→Compatibility* (Tab: "CMI") and make sure that the option "Use one temporary product window…" is checked.

Read an assembly into CATIA using the *Read* command in CMI toolbar.

In CATIA V5 select the *AddTemp from Teamcenter* icon .

Select the BOM CATPart, no BOM CATPart, or CATDrawing you want to add temporarily to CATIA into the CMI RII application. Click *CMI RII→Temp To CATIA* in the menu.

CATIA comes to the foreground with both the original and temporarily added objects loaded in the same window.

It will not be possible to make any changes to the temporarily added object.

All Part Numbers and File Names of the temporarily added objects are prefixed with "TMP#_", where "#" is a counter in CATIA V5, beginning with 1. Every *AddTemp* will increase the counter. This prefix is customizable by the customer.

CMI RII→Insert/Replace To CATIA

The menu item *CMI RII→Insert/Replace To CATIA* allows the user to load a CMI structure under a selected product or to replace the selected item in the structure.

Insert:

Read an assembly into CATIA V5 using the *Read from Workbench* command in CMI toolbar.

Select a product to be the root of the inserted structure.

In CATIA V5 select the *Insert from Teamcenter* icon .

Select the item revision of the BOM geometry or the dataset of the auxiliary geometry you want to use in CATIA V5 in the My Teamcenter application window. Click *CMI RII→Insert/Replace To CATIA* in the menu.

CATIA comes to the foreground with the selected product and the used structure.

Via *Synchronize* you can save the new Use-Relation in Teamcenter.

Replace:

Read an assembly into CATIA V5 using the *Read from Workbench* command in CMI toolbar.

Select a product to be replaced in the structure.

In CATIA V5 select the *Replace from Teamcenter* icon .

Select the item revision of the BOM geometry or the dataset of the auxiliary geometry you want to use in CATIA V5 in the My Teamcenter application window. Click *CMI RII→Insert/Replace To CATIA* in the menu.

CATIA comes to the foreground and asks if you want to replace all instances of the selected item or only the selected instance of the item. Then you see the changed structure.

Via *Synchronize* you can save the changed structure in Teamcenter.

CMI RII→Cancel CATIA Action

The menu item *CMI RII→Cancel To CATIA* will cancel the CATIA action which is started from CATIA (e.g. *SaveAs* and *AddTemp*).

CMI RII→Add
CMI RII→Create

The Newstuff settings for item and dataset (CMINewstuffItems, CMINewstuffItemsIndividualName, CMINewstuffDatasets, CMINewstuffDatasetsIndividualName) will be used for the newly created item/item revision and dataset.

The item type selector in the create dialog can be switched on with the preference "CMISelectItemType" set to "1".

Set "CMICreateDialogRememberAttributes" to "1" in order to remember the attributes of the create dialog.

CMI RII→Add→CATIA BOM Part Dataset

The menu item *CMI RII→Add→CATIA BOM Part Dataset* will create a BOM part dataset for an existing item revision and relate it to the selected item revision.

Select an item revision in the My Teamcenter application in Teamcenter.

It is not possible to use this function if already a CATIA Product, BOM geometry or AUX geometry dataset exists for this item revision. An error message will occur.

Select the menu item *CMI RII→Add→CATIA BOM Part Dataset*.

The create dataset dialog will open (see Figure 39). Select a template dataset for a BOM part out of the possible values. Fill the values and click OK.

The BOM part dataset will be created. The referenced CATIA file of the template dataset will be copied and saved with a new file name and added as named

reference to the new dataset. The dataset will be related to the selected item revision.

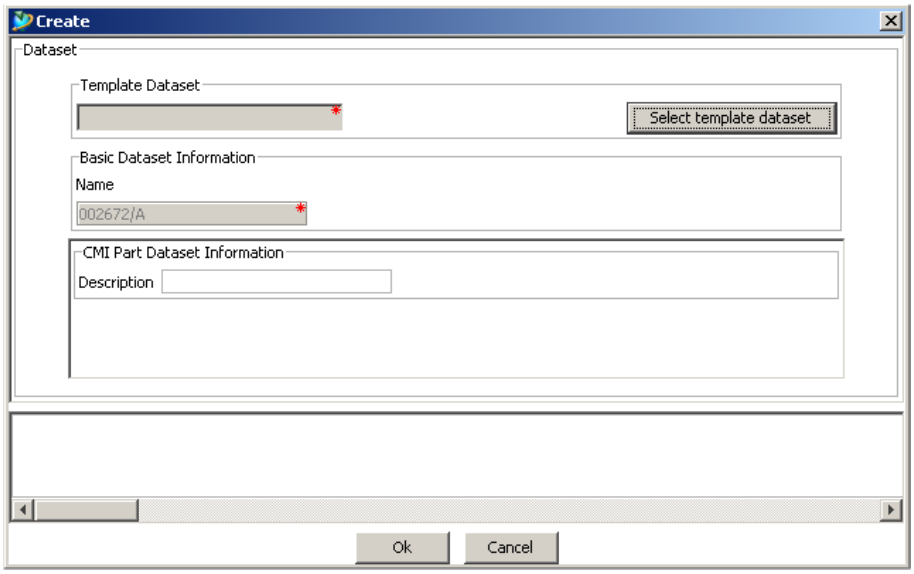

Figure 39: Create dialog for CATIA BOM Part Dataset for Item Revision

CMI RII→Add→CATIA AUX Part Dataset

The menu item *CMI RII→Add→CATIA AUX Part Dataset* will create an auxiliary part dataset for an existing item revision and relate it to the selected item revision.

Select an item revision in the My Teamcenter application in Teamcenter.

It is not possible to use this function if already a CATIA BOM geometry dataset exists for this item revision. An error message will occur.

Select the menu item *CMI RII→Add→CATIA AUX Part Dataset*.

The create dataset dialog will open (see Figure 40). Select a template dataset for an auxiliary part out of the possible values. Fill the values and click OK.

The auxiliary part dataset will be created. The referenced CATIA file of the template dataset will be copied and saved with a new file name and added as named reference to the new dataset. The dataset will be related to the selected item revision.

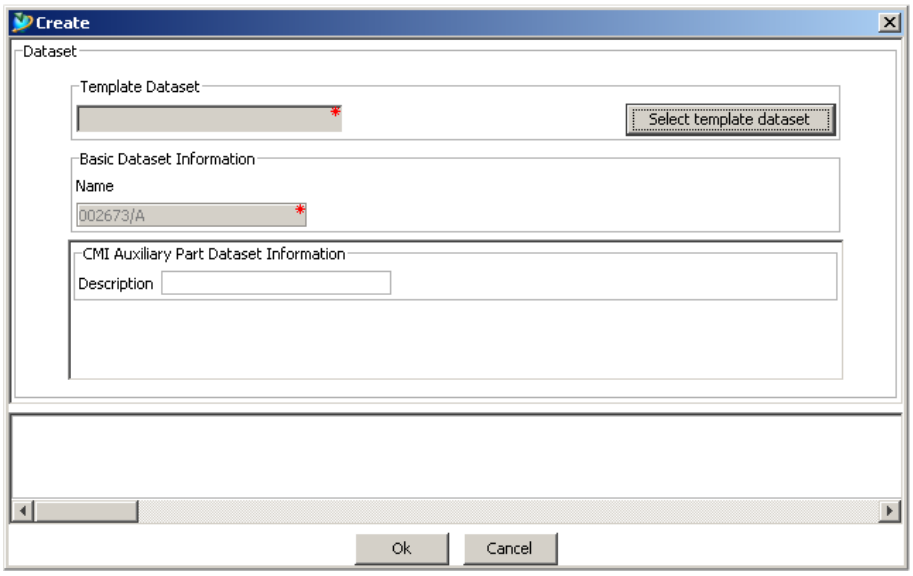

Figure 40: Create dialog for CATIA AUX Part Dataset for Item Revision

CMI RII→Add→CATIA Product Dataset

The menu item *CMI RII→Add→CATIA Product Dataset* will create a product dataset for an existing item revision and relate it to the selected item revision.

Select an item revision in the My Teamcenter application in Teamcenter.

It is not possible to use this function if already a CATIA Product or BOM geometry dataset exists for this item revision. An error message will occur.

Select the menu item *CMI RII→Add→CATIA Product Dataset*.

The create dataset dialog will open (see Figure 41). Select a template dataset for a product out of the possible values. Fill the values and click OK.

The product dataset will be created. The referenced CATIA file of the template dataset will be copied and saved with a new file name and added as named reference to the new dataset. The dataset will be related to the selected item revision.

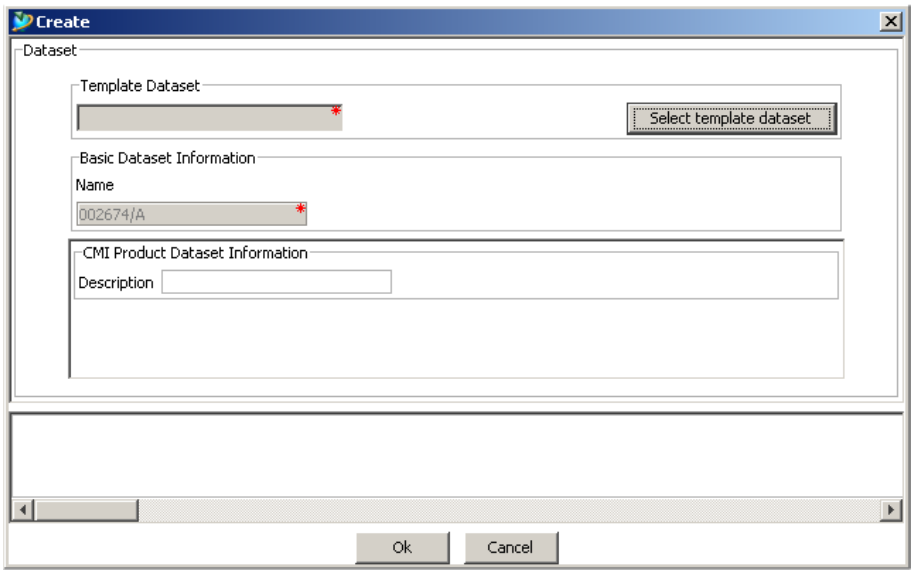

Figure 41: Create dialog for CATIA Product Dataset for Item Revision

CMI RII→Add→CATIA Drawing Dataset

The menu item *CMI RII→Add→CATIA Drawing Dataset* will create a Drawing dataset for an existing item revision and relate it to the selected item revision.

Select an item revision in the My Teamcenter application in Teamcenter.

Select the menu item *CMI RII→Add→CATIA Drawing Dataset*.

The create dataset dialog will open (see Figure 42). Select a template dataset for a drawing out of the possible values. Fill the values and click OK.

The drawing dataset will be created. The referenced CATIA file of the template dataset will be copied and saved with a new file name and added as named reference to the new dataset. The dataset will be related to the selected item revision.

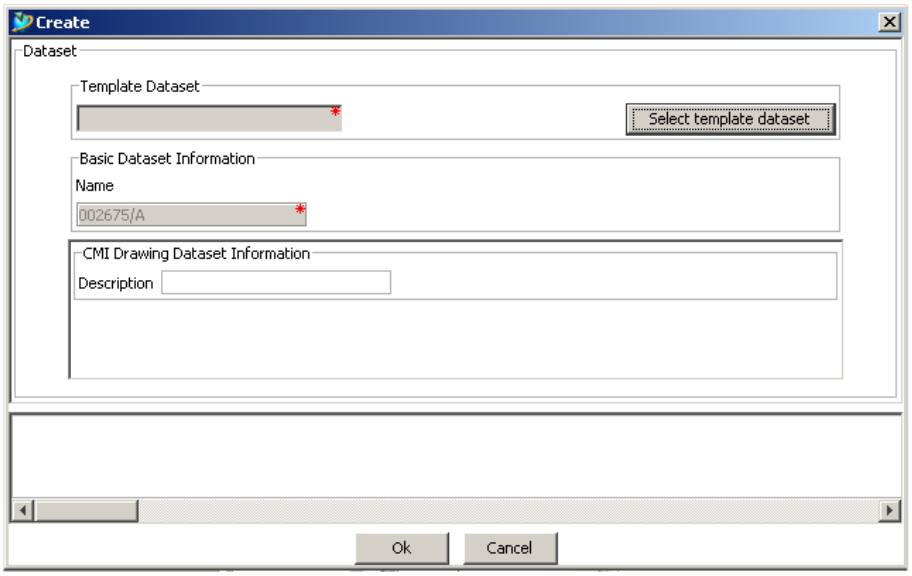

Figure 42: Create dialog for CATIA Drawing Dataset for Item Revision

CMI RII→Create→CATIA BOM Part Item

The menu item *CMI RII→Create→CATIA BOM Part Item* will create a new item with a BOM part dataset.

Select the menu item *CMI RII→Create→CATIA BOM Part Item*.

The create dialog for item and dataset will open (see Figure 43). Select a template dataset for a BOM part out of the possible values. Fill the values and click OK.

The item, item revision, and BOM part dataset will be created. The referenced CATIA file of the template dataset will be copied and saved with a new file name and added as named reference to the new dataset. The dataset will be related to the new item revision.

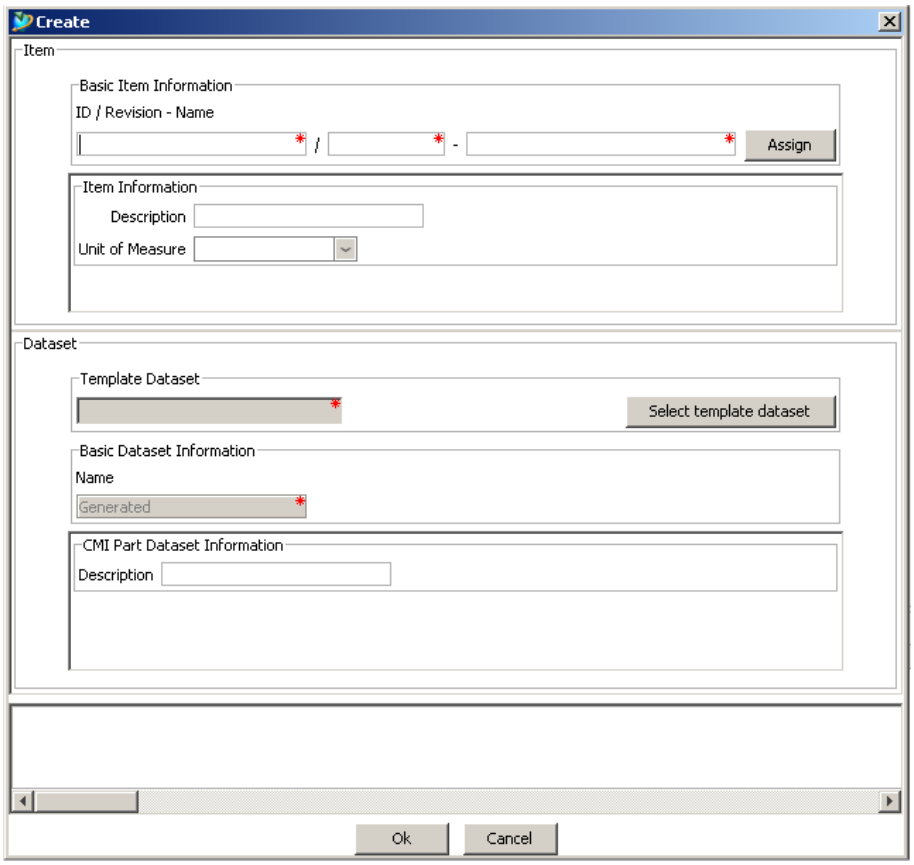

Figure 43: Create dialog for CATIA BOM Part Item

CMI RII→Create→CATIA AUX Part Dataset

The menu item *CMI RII→Create→CATIA AUX Part Dataset* will create a new auxiliary part dataset.

Select the menu item *CMI RII→Create→CATIA AUX Part Dataset*.

The create dataset dialog will open (see Figure 44). Select a template dataset for an auxiliary part out of the possible values. Fill the values and click OK.

The auxiliary part dataset will be created. The referenced CATIA file of the template dataset will be copied and saved with a new file name and added as named reference to the new dataset.

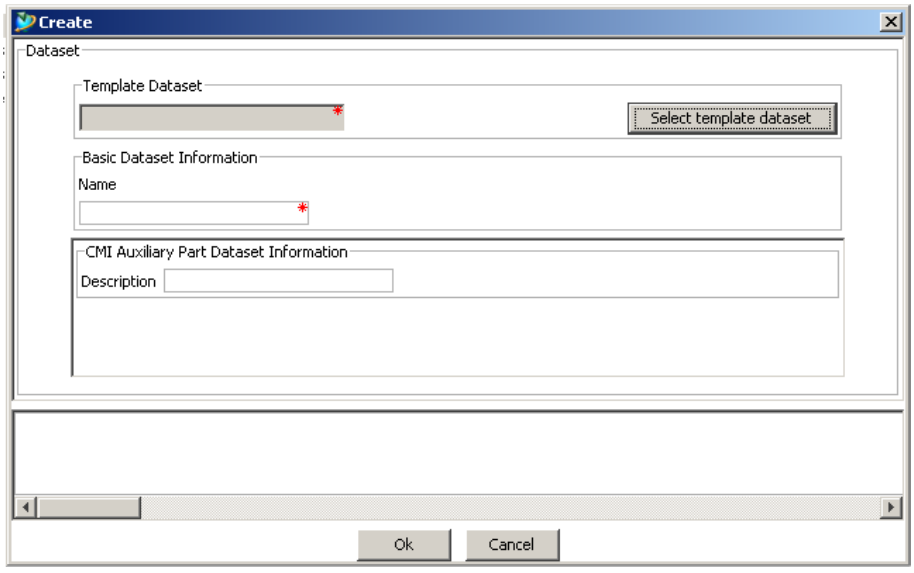

Figure 44: Create dialog for CATIA AUX Part Dataset

CMI RII→Create→CATIA Product Item

The menu item *CMI RII→Create→CATIA Product Item* will create a new item with a product dataset.

Select the menu item *CMI RII→Create→CATIA Product Item*.

The create dialog for item and dataset will open (see Figure 45). Select a template dataset for a product out of the possible values. Fill the values and click OK.

The item, item revision, and product dataset will be created. The referenced CATIA file of the template dataset will be copied and saved with a new file name and added as named reference to the new dataset. The dataset will be related to the new item revision.

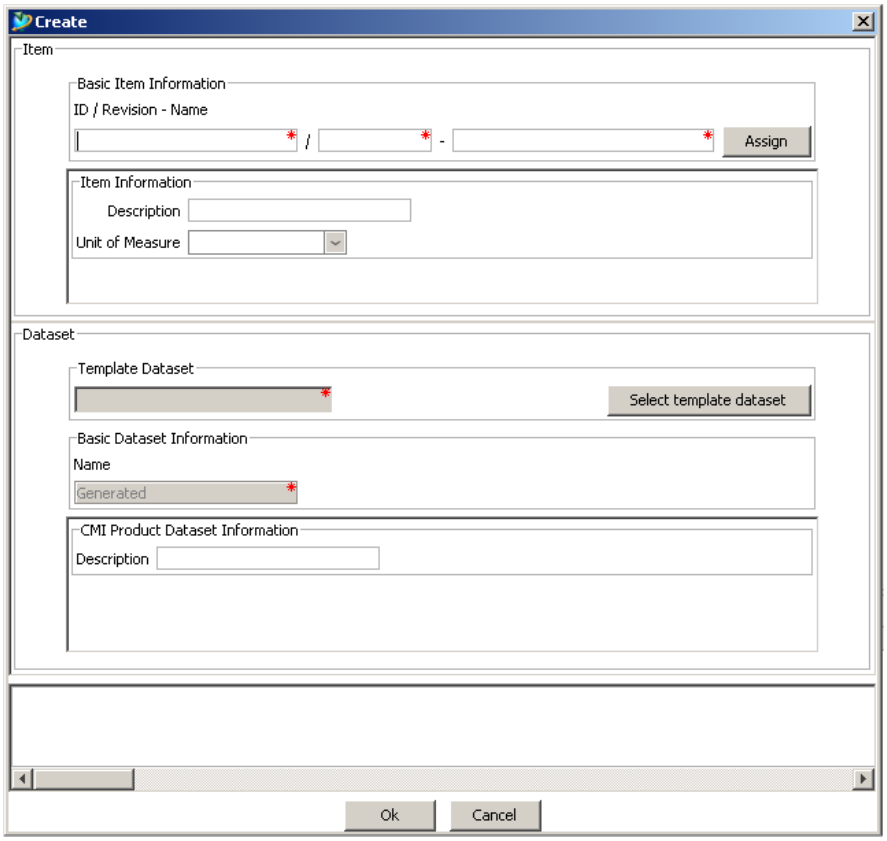

Figure 45: Create dialog for CATIA Product Item

CMI RII→Create→CATIA Drawing Dataset

The menu item *CMI RII→Create→CATIA Drawing Dataset* will create a new drawing dataset.

Select the menu item *CMI RII→Create→CATIA Drawing Dataset*.

The create dataset dialog will open (see Figure 46). Select a template dataset for a drawing out of the possible values. Fill the values and click OK.

The drawing dataset will be created. The referenced CATIA file of the template dataset will be copied and saved with a new file name and added as named reference to the new dataset.

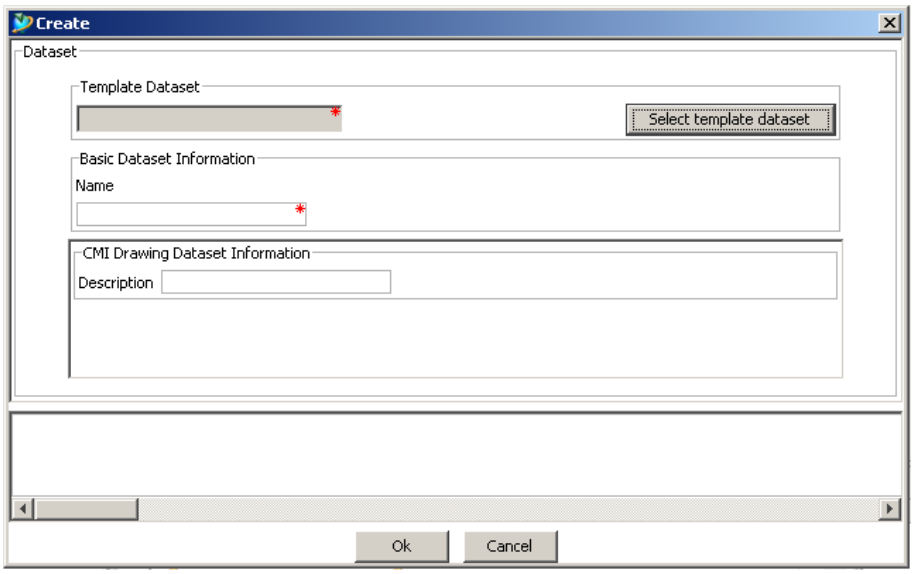

Figure 46: Create dialog for CATIA Drawing Dataset

CMI RII→Dataset Revise

The menu item *CMI RII→Dataset Revise* revises the selected dataset. For more details see chapter *Dataset pseudo Revise* on page 103.

Select the dataset you want to revise. Click *CMI RII→Dataset Revise* in the menu.

CHAPTER 4

CATIA relevant Objects in Teamcenter

This chapter describes how to handle CATIA relevant data in Teamcenter.

Predefined Object Structure

The *CATIA Teamcenter Interface (CMI RII)* uses the following predefined object structure for CATProducts.

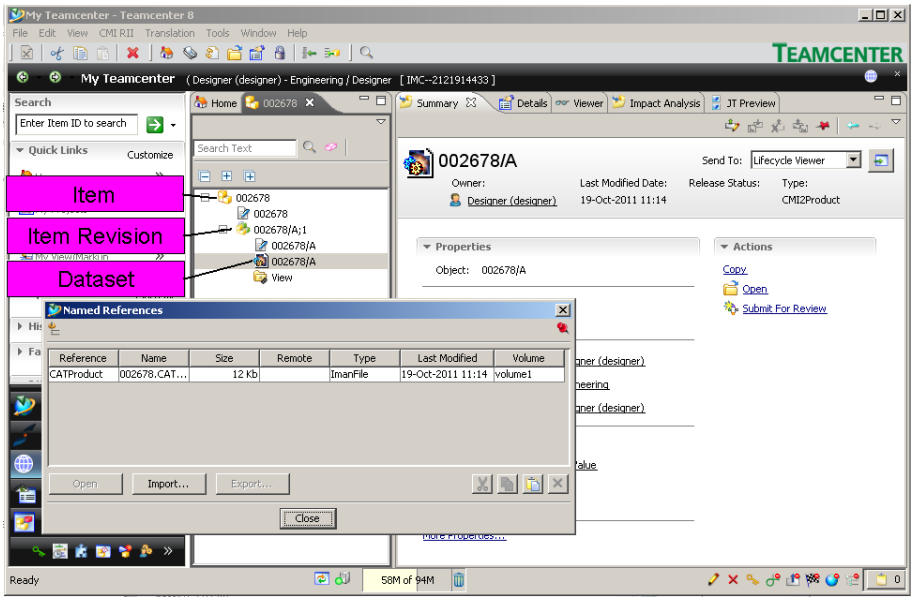

Figure 47: Predefined CATProduct object structure

An Item Revision has a Dataset attached of the type CMI2Product. The Dataset has exactly one Named Reference of the type CATProduct. This will be loaded to CATIA as a CATProduct.

If no Dataset is attached to the Item Revision, a new Product is created in CATIA with the Read operation.

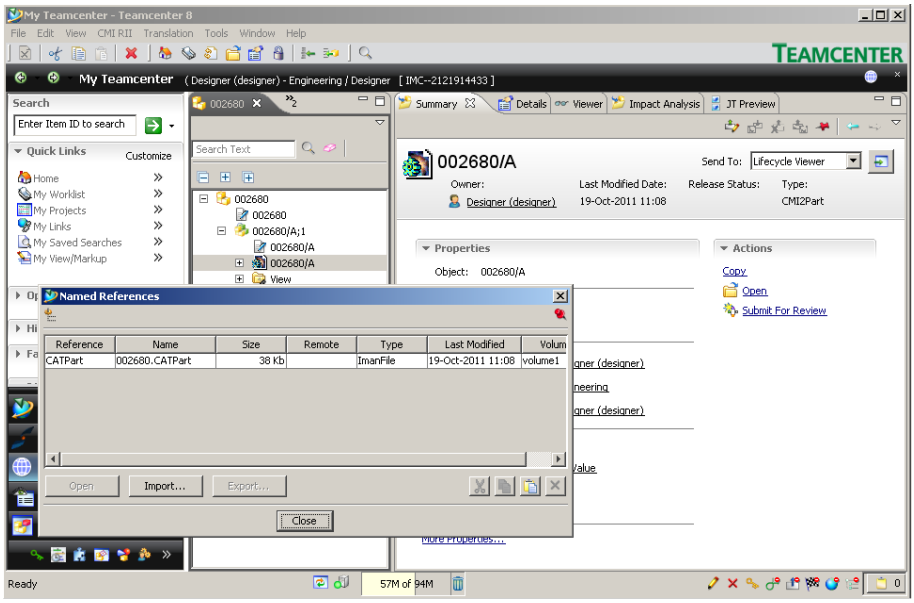

Figure 48: Predefined CATPart object structure

An Item Revision has a Dataset attached of the type CMI2Part. The Dataset has exactly one Named Reference of the type CATPart. This will be loaded to CATIA as a CATPart.

If an empty Dataset of the type CMI2Part is attached to the Item Revision, a new CATPart is created in CATIA with the Read operation.

Named References of the type CMI2Part can handle references of the type *model* and *cgr* which will be loaded in CATIA with the Read operation.

'model' is used for V4 CATIA model files.

'cgr' is used for light geometry representation files.

Working with Structures

A structure is made of one or more items.

An item can contain other items.

Creating an Item

In a Teamcenter Rich Client (e.g. My Teamcenter or Structure Manager application) select *File→New→Item …*

The Item creation wizard is started and guides you through the Item Creation Process.

Searching for Items

In a Teamcenter Rich Client (e.g. My Teamcenter application) press the *search* button.

In the Search window use the Predefined Search for Items. The result is displayed in the My Teamcenter application.

Creating a Structure

To create or modify a structure in Teamcenter use the Structure Manager application.

The figure below shows an example assembly with expanded items in the Structure Manager application browser.

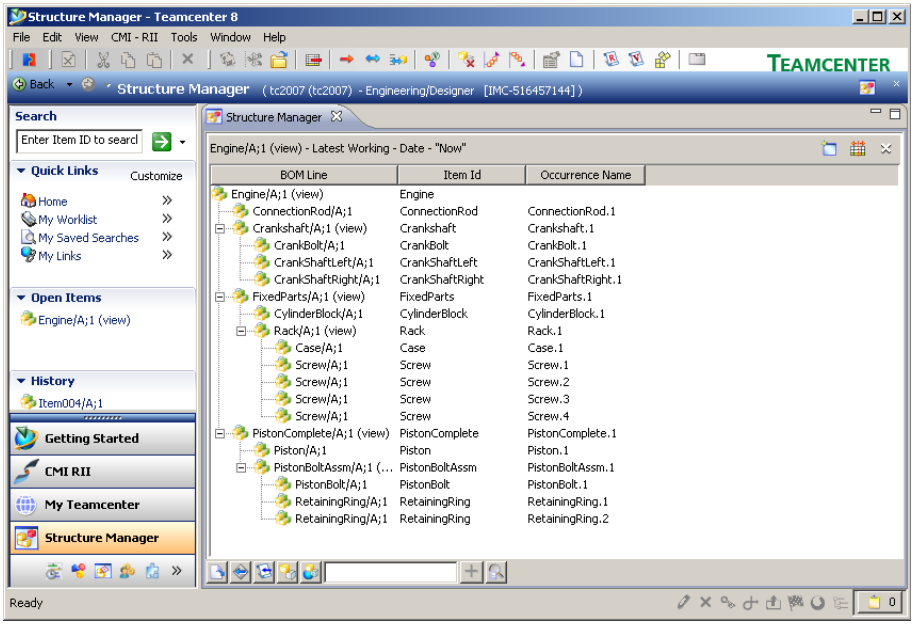

Figure 49: Example of an expanded assembly in Teamcenter Structure Manager application

Example Structure for CMI

The following instructions describe step by step how to create an example assembly structure which can then be loaded into the CATIA session:

Start the Structure Manager application in Teamcenter Rich Client (see Figure 50).

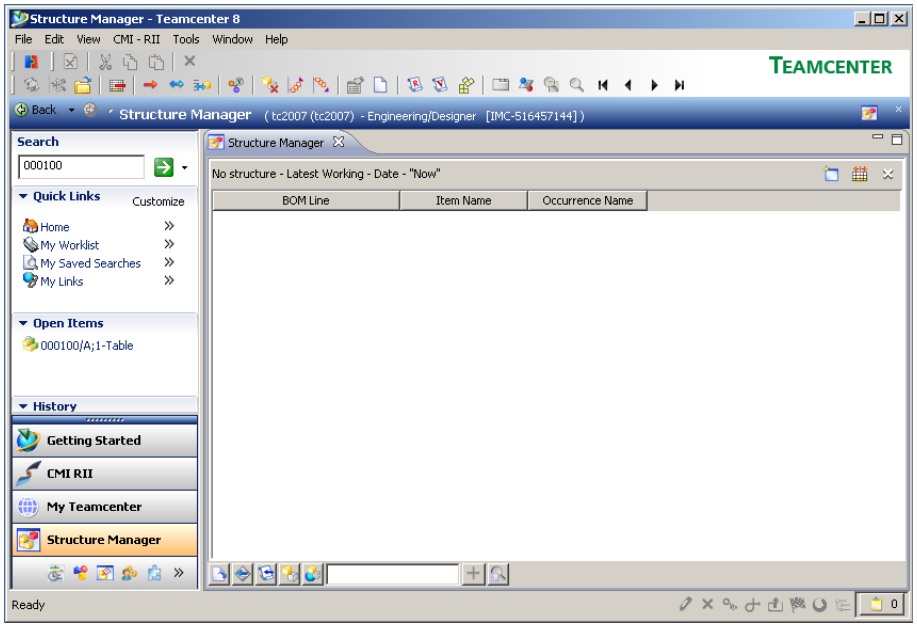

Figure 50: Empty Teamcenter Structure Manager application

Create a new item named “Table” with *File→New→Item…*

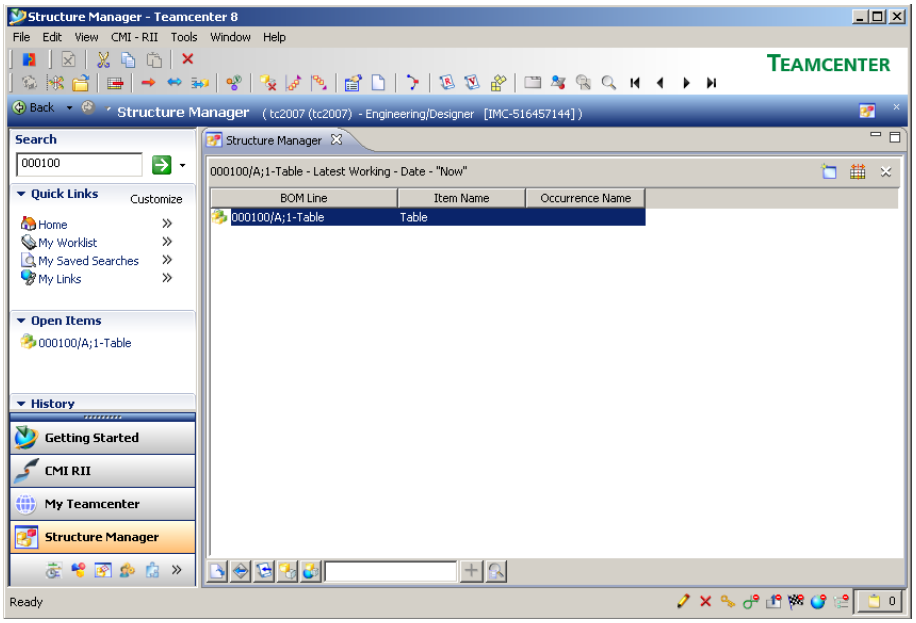

Figure 51: Structure Manager application with “Table”

Select the “Table” and create a new item named “Plate” with *File→New→Item…*

Select the “Table” and create a new item named “Leg” with *File→New→Item…*

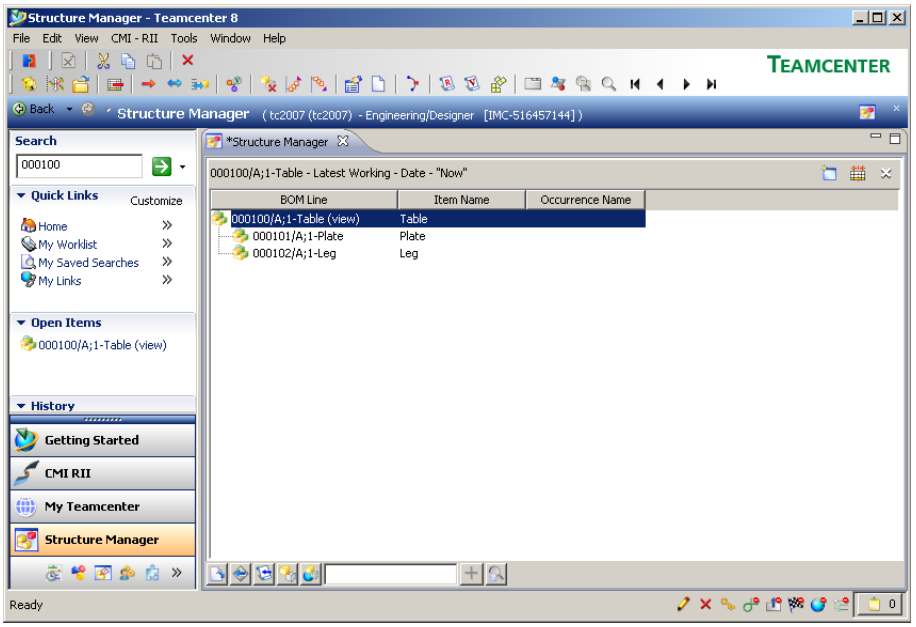

Figure 52: Structure Manager application with “Table”, “Plate”, and “Leg”

Select the “Plate”, and right click *Send To→My Teamcenter*.

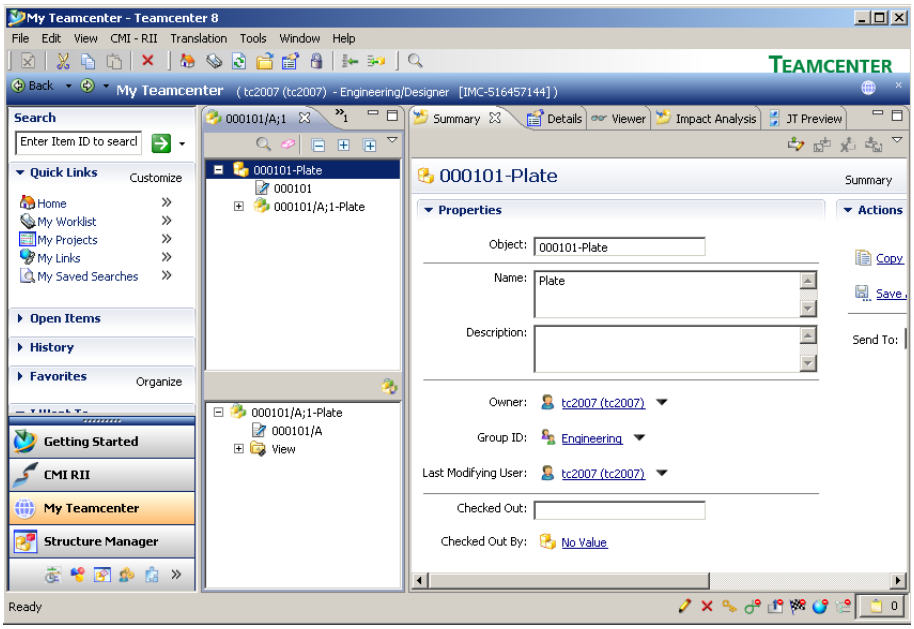

Figure 53: My Teamcenter application with "Plate"

Select the Item Revision "xxxxx/A;1 – Plate" and use the command *File→New→Dataset…* to create a new dataset of type CMI2Part to define a geometry.
Use the *More…* button on the left side to select the type CMI2Part.
The CMICatiaV5 Tool is set automatically.

Press the OK button to continue.

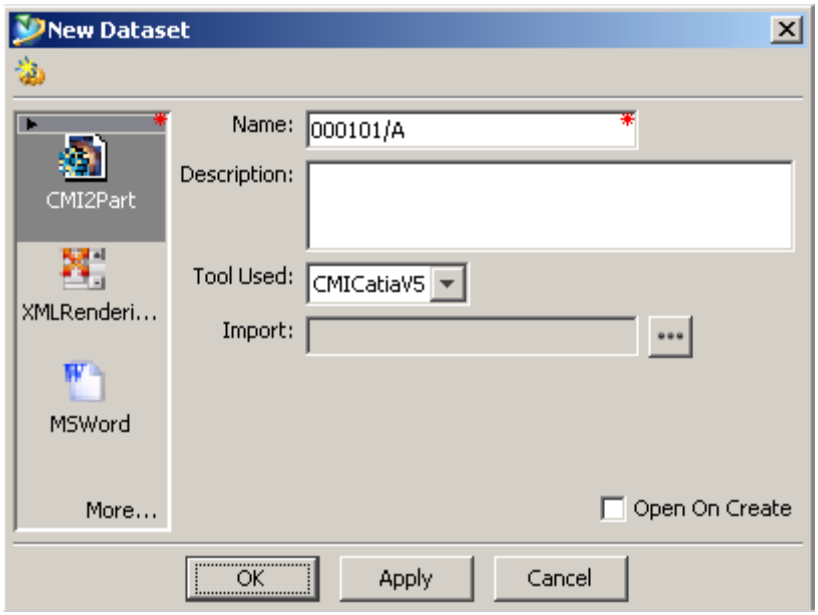

Figure 54: New Dataset dialog

Repeat the same procedure for the "Leg" item and switch to the Structure Manager application.

Select the "Leg" of the "Table" in the Structure Manager application and copy the item with *Edit→Copy*.

Select the "Table" item and paste the "Leg" item three times with *Edit→Paste*.

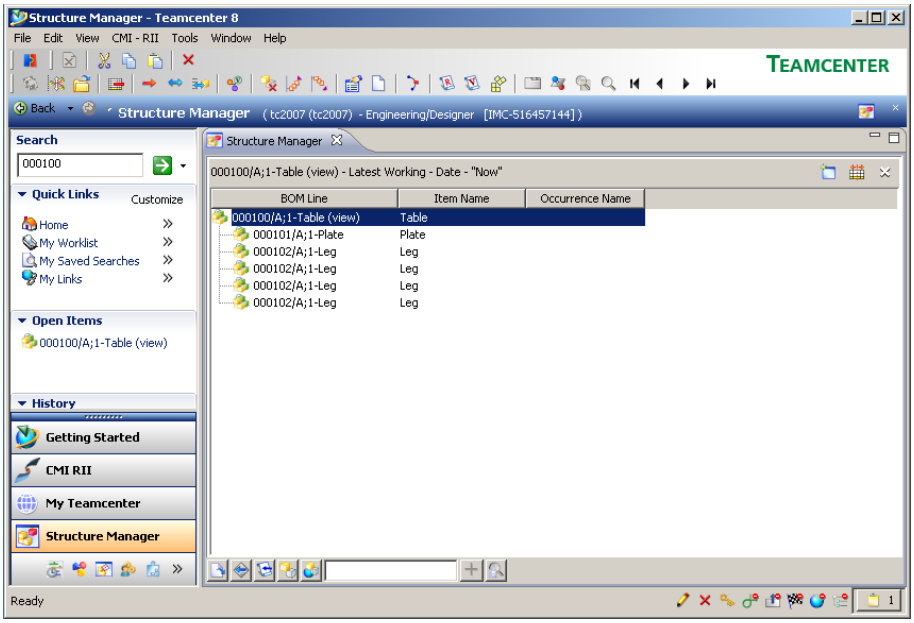

Figure 55: Structure Manager application with complete "Table"

Check that CATIA is started with installed CMI RII.

Select the "Table" in the Structure Manager application and right click *Send To→CMI RII*.

Select the "Table" in the CMI RII application and right click *Expand Below*.

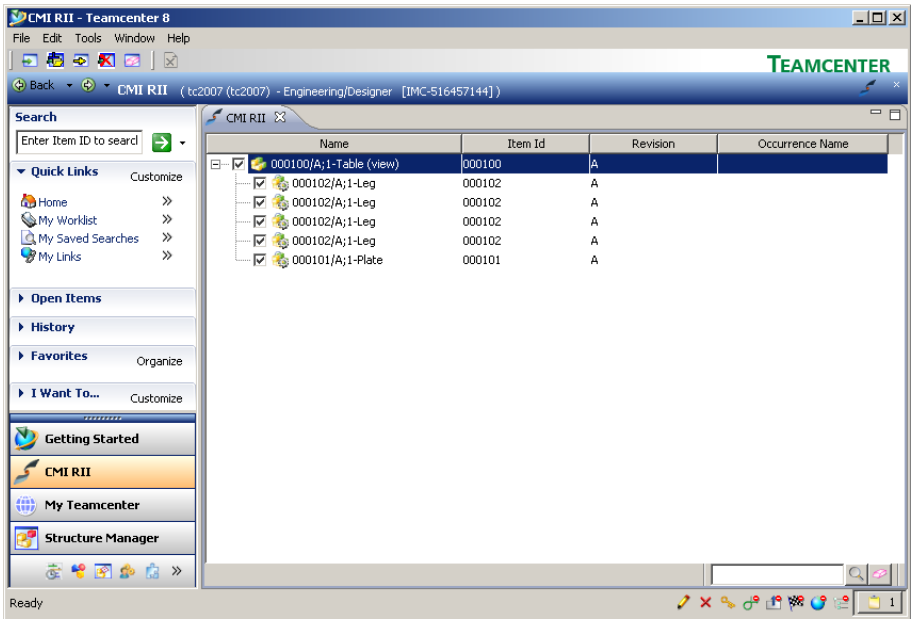

Figure 56: CMI RII application with complete "Table"

Verify that all items are checked. Only checked and expanded items will be sent to CATIA.

Use the *Tools→Send To CATIA* command to send the content to CATIA.

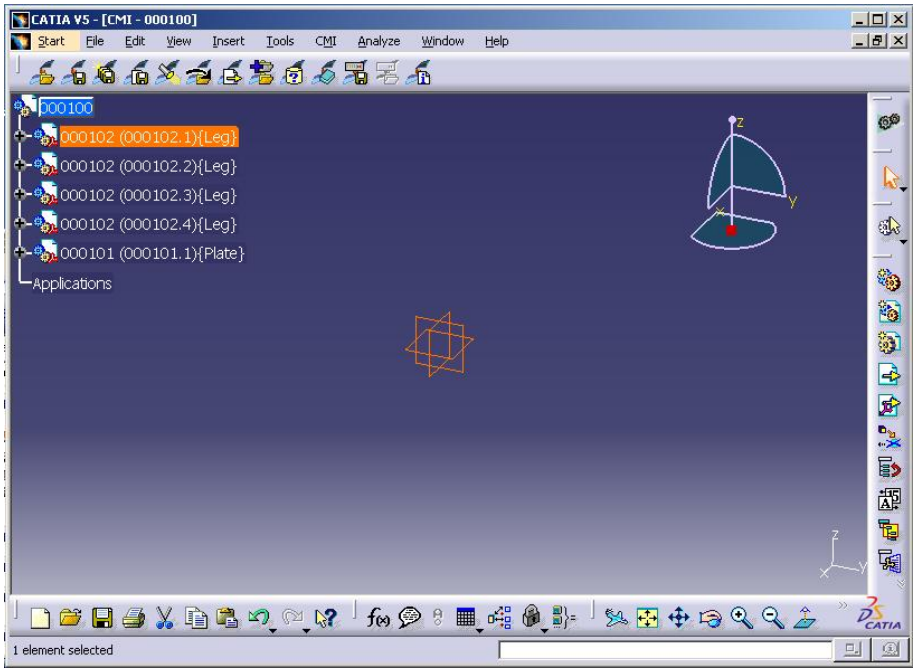

Figure 57: CATIA V5 with loaded "Table"

Updating a Structure

Complete construction in CATIA and press the Update button in CATIA V5.

The files in CATIA and the metadata are updated to Teamcenter.

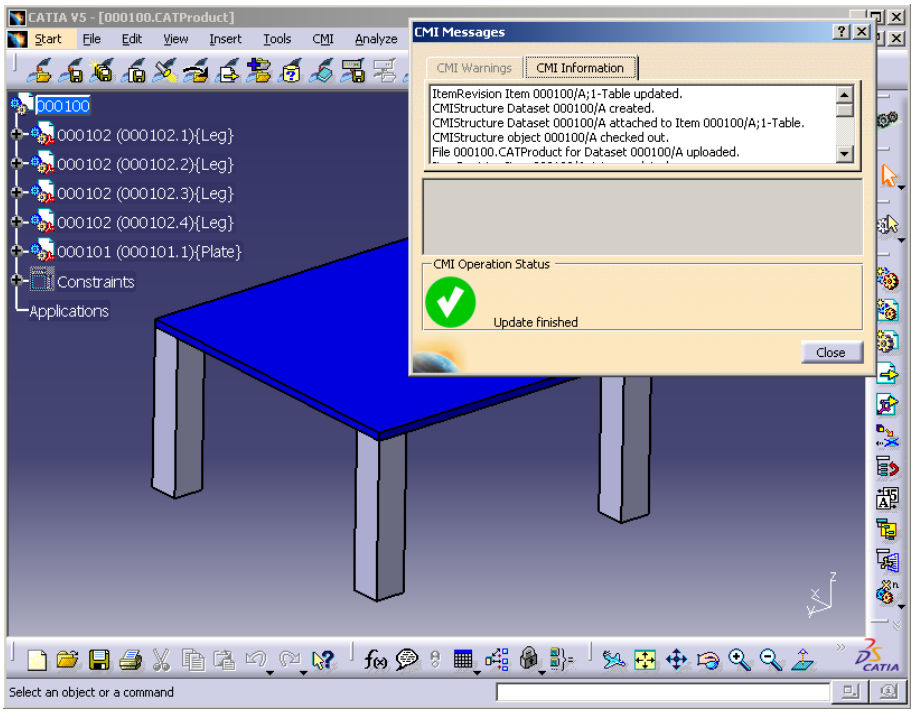

Figure 58: CATIA V5 with updated "Table"

Change the visible attributes in the CMI RII application and check the values for Occurrence name and Matrices. Both attributes are filled with the current CATIA data.

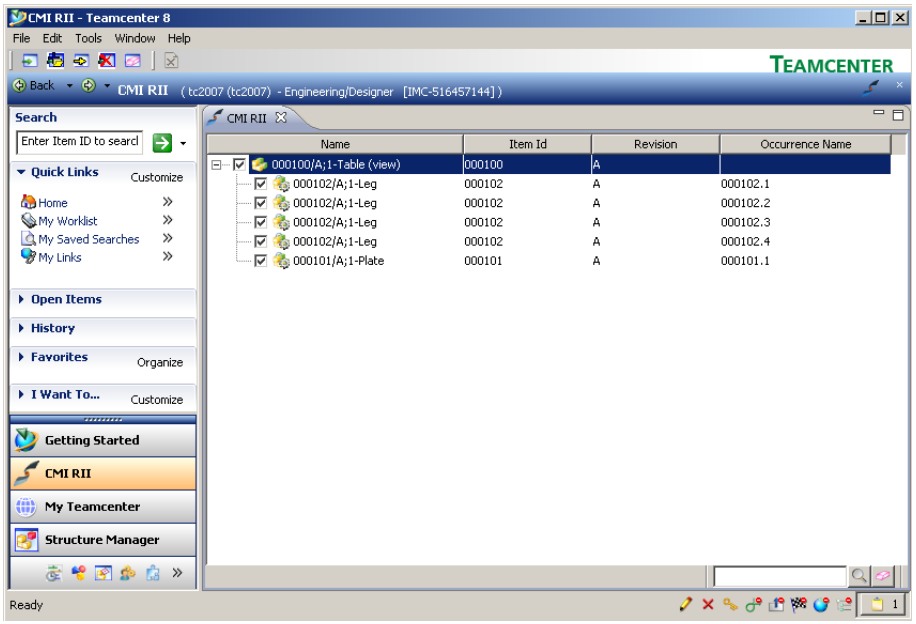

Figure 59: CMI RII application with complete “Table”

Select the “Plate” and right click *Send To→My Teamcenter*.
Verify that the dataset and a named reference are added.

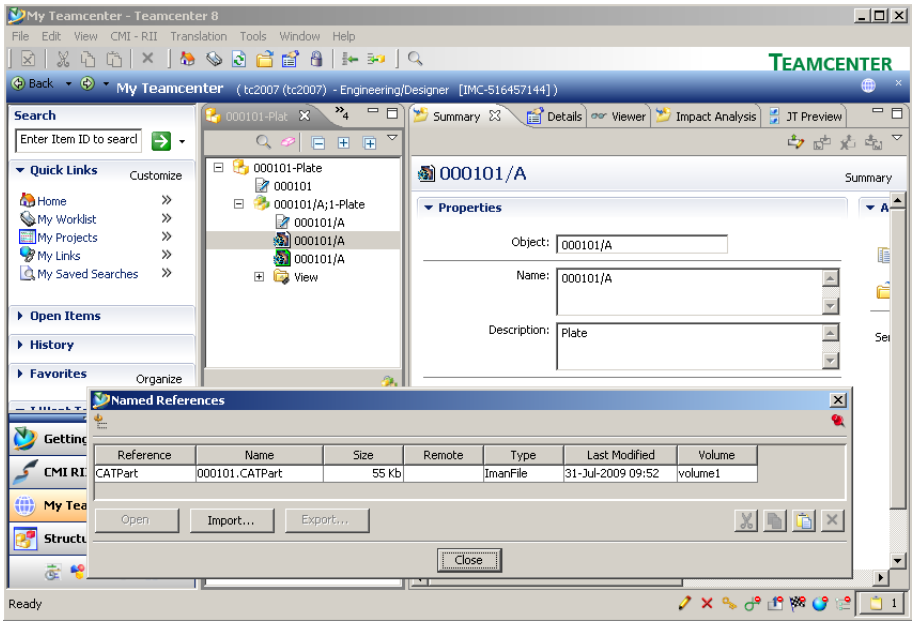

Figure 60: “Table” item in My Teamcenter

Highlighting an Item in CATIA

In cases where you have loaded an assembly structure to CATIA as described in the steps above, it may be useful to find the corresponding model in the CATIA session of an item displayed within the CMI RII application.

For this purpose, it is possible to highlight CATIA models in CATIA using the currently selected item in the CMI RII application.

In the CMI RII application, select the item you want to be highlighted in the CATIA session and choose the *Highlight in CATIA* option in the Pop-Up menu.

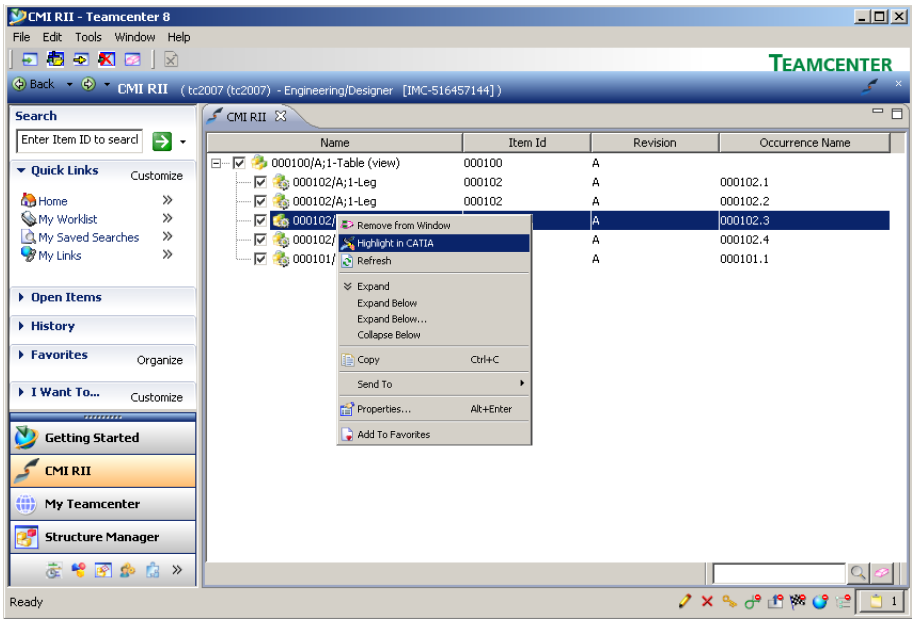

Figure 61: Highlight in CATIA in Pop-Up menu in CMI RII application

CATIA comes to the foreground with the selected CATIA model highlighted.

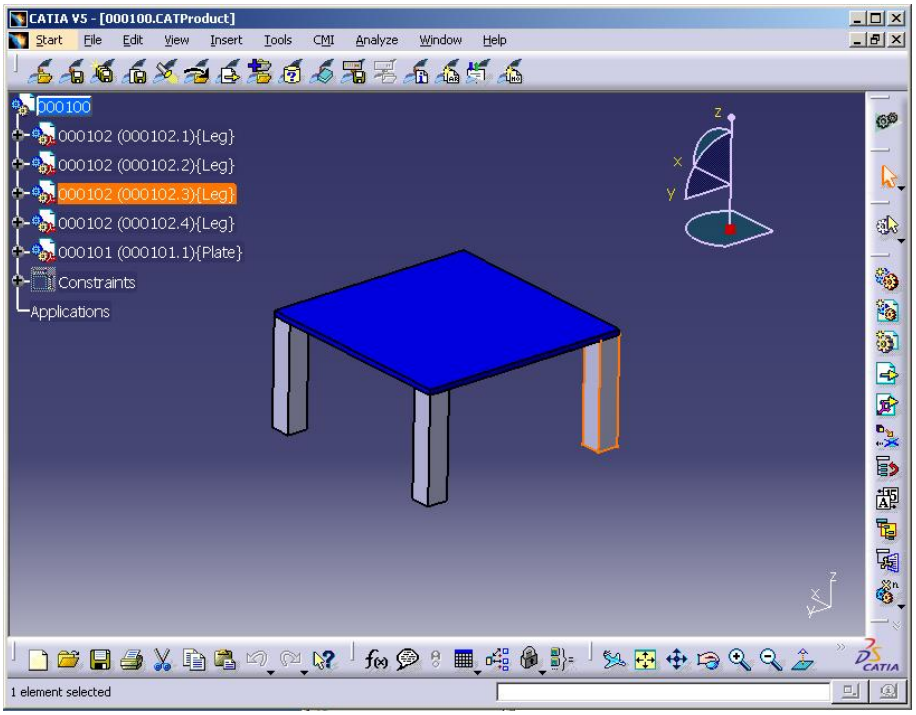

Figure 62: Highlighted item in CATIA V5

The *Highlight in CATIA* action is also available in the Structure Manager, the Multi-Structure Manager and the Manufacturing Process Planner application.

Send to CATIA

In the My Teamcenter application the context menu for item revision (see Figure 63) contains the commands *Send to CATIA* and *Send Configured to CATIA*. For details please see chapter *CMI RII Menu bar in the My Teamcenter Application*.

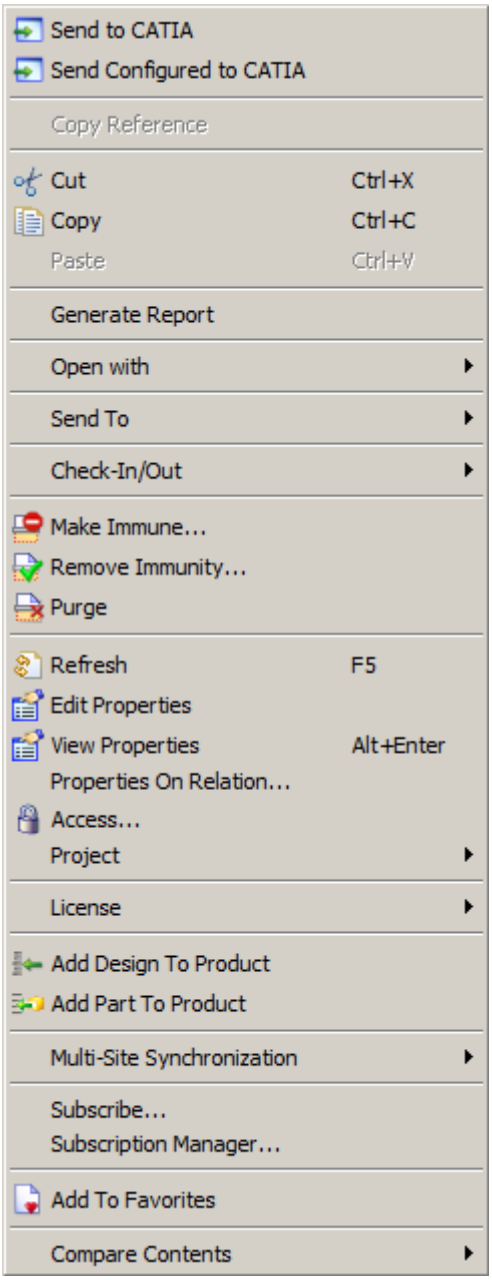

Figure 63: My Teamcenter context menu for item revision

CHAPTER 5

Working with CATIA V5

Introduction

This chapter describes the CMI interface between CATIA V5 and Teamcenter. Typical tasks discussed are loading items/structures/drawings stored in Teamcenter into *CATIA V5* and creating/updating parts and drawings in Teamcenter. One of the main subsections deals with creating and saving CATIA V4 models.

Product Structure CATIA V5 vs. Teamcenter

Product structures in Teamcenter correspond well to product structures found in CATIA V5. The following graphic illustrates the product structure in Teamcenter and CATIA V5.

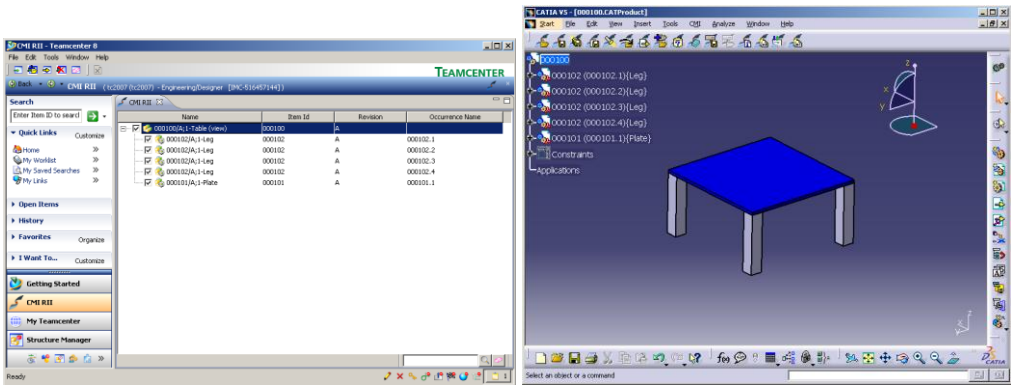

Figure 64: Product Structure in Teamcenter and CATIA V5

CMI Toolbar

The following figure shows the toolbar of the CATIA V5 CMI module. Descriptions of the toolbar and the command icons follow below.

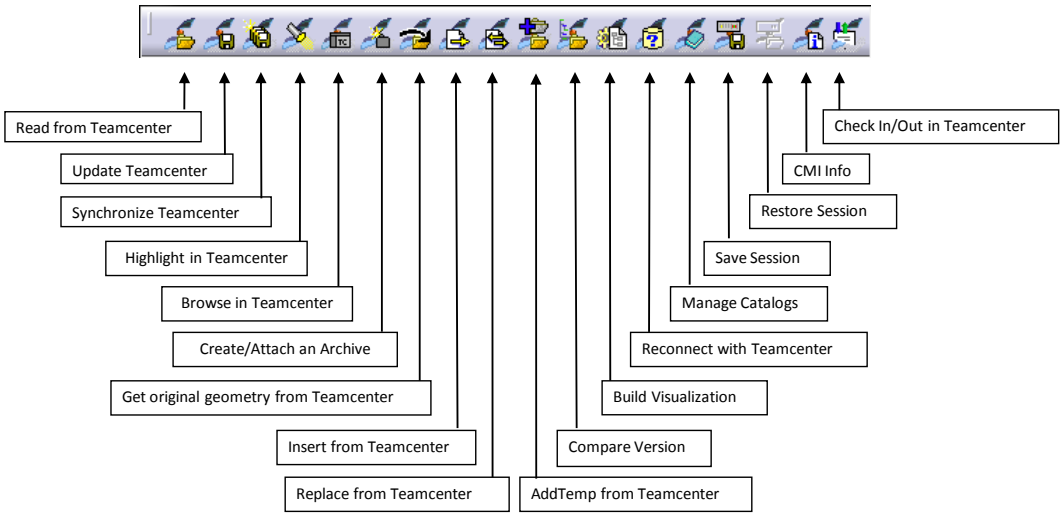

Figure 65: CMI Toolbar in CATIA V5

With the *CMI toolbar* it is possible to read files from the CMI RII application in Teamcenter. You can then modify the geometry in your CATIA V5 session. The modifications can be updated in Teamcenter via the *Update Teamcenter* or the *Synchronize Teamcenter* button in CATIA V5.

The icon *Highlight in Teamcenter* is only active if you are working with a product structure.

You can get the Teamcenter information of the CATParts, CATProducts, CATDrawings, and CATIA V4 Models with the *CMI Info* button if you loaded the product structure with CMI to CATIA V5.

The other commands will be described in more detail later in this chapter.

CATDrawings in CMI RII Application in Teamcenter

CATIA V5 will read all expanded assemblies, single CATDrawings from the Teamcenter CMI RII application.

The following figure shows a CATDrawing in the CMI RII application:

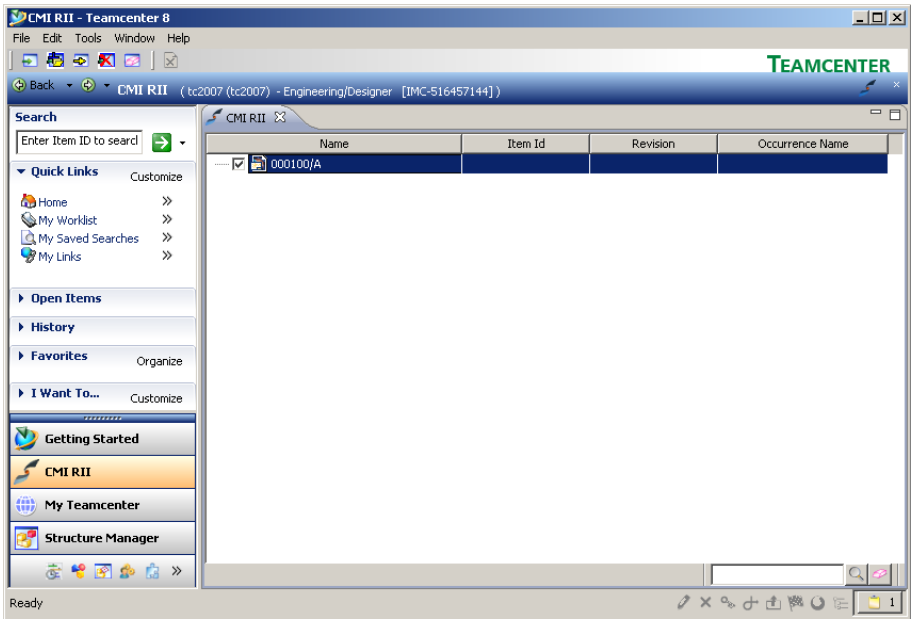

Figure 66: CMI RII application with a CATDrawing dataset

When you have transferred a CATDrawing from Teamcenter to CATIA V5 via the CMI RII application, the drawing will be displayed in CATIA V5 in a new window.

CMI for CATIA V5 also supports CATIA V4 models and CATIA V5 Drawing files (CATDrawings). CATDrawings may be included in assembly structures in Teamcenter, however in CATIA V5 they will be displayed in separate windows as shown in the figure below.

All normal CMI functions (Read, Update, Create, and Save As) may be used with CATDrawings and CATParts within CATIA V5.

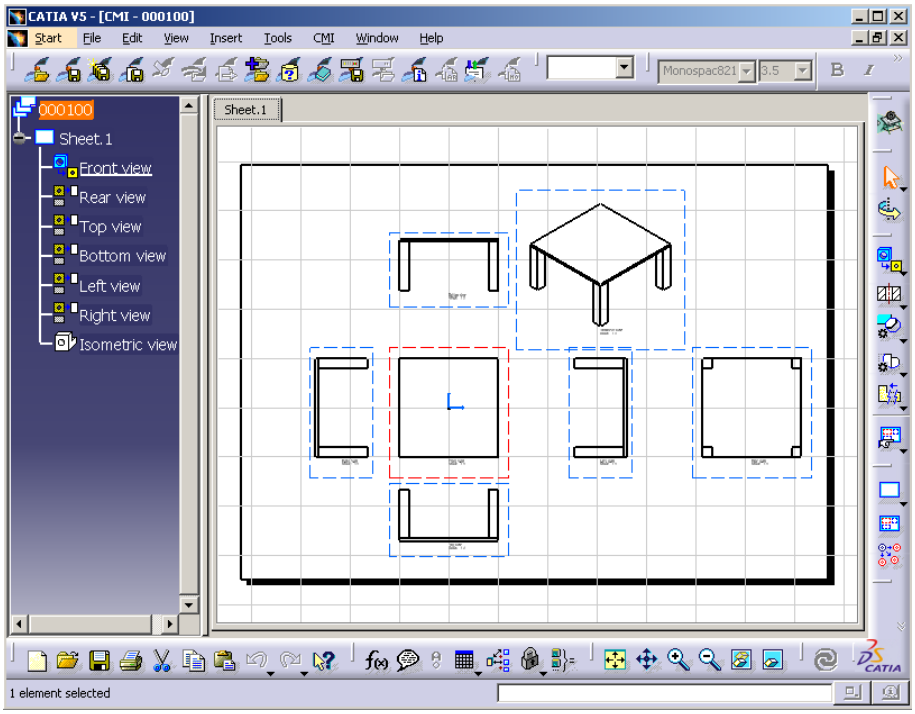

Figure 67: Drawing Workbench for Read, Update, Create or Save As CATDrawing

CMI toolbar: Read From Workbench

With the *Read from Workbench* button in the CMI Toolbar the content of the CMI RII application in Teamcenter may be read into CATIA V5. The CMI RII application may contain CATDrawings, and assembly structures.

If you want to send one or more assemblies, CATParts, CATDrawings or cgms to CATIA V5 follow these instructions:

Drag and drop or send drawings (CMI2Drawing datasets), cgms (CMI2Cgm datasets) or assemblies (items) into the CMI RII application.

Expand or Deexpand the assemblies in the CMI RII application. Only those items that are shown in the CMI RII application will be opened in CATIA.

Read Teamcenter CATIA items with the *Read From Workbench* icon .

Every top-level item in the CMI RII application will be opened in a separate browser in CATIA V5.

If the Structure Manager application is the current active application in the Teamcenter Rich Client the Structure Manager content will be read to CATIA instead of the content of the CMI RII application. It is the same with the Multi-Structure Manager and the Manufacturing Process Planner application.

CMI toolbar: Update Teamcenter

This command updates geometry and position information in Teamcenter.

Modify the content in CATIA.

Write the modifications back with *Update Teamcenter* icon .

All files in the assembly and the position information (transformation matrix) which have been modified in CATIA will be updated in Teamcenter.

The success (green icon) and more detailed information (see Figure 68) are then displayed to the user.

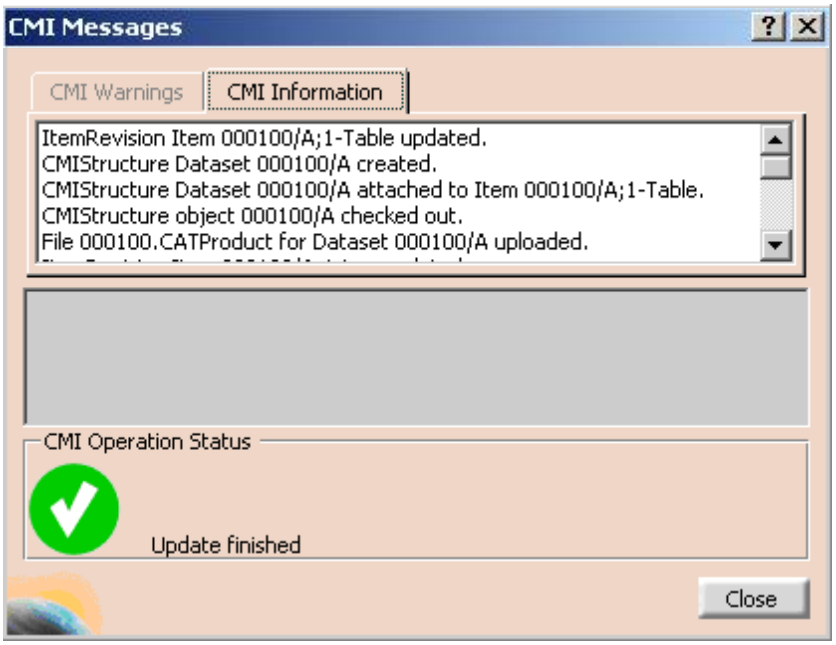

Figure 68: Dialog Window for Update Teamcenter

CMI toolbar: Synchronization in Teamcenter

This command updates Teamcenter with any changes made to your CATIA V5 product structure. The changes that will be reflected in Teamcenter include:

- any geometry and position information changes,
- the creation of any new CATParts/cgrs/models and CATProducts that have been added to your product structure,
- the creation of any new CATPart/cgr/model and CATProduct instances,
- the removal of CATPart/cgr/model and CATProduct instances from the product structure.

The changes made to the product structure since the last Read/Update/Synchronize are presented in the form of a list of operations to be performed in Teamcenter.

Modify your product structure in CATIA by adding a new CATPart/cgr, adding a new CATProduct, removing a product or by changing the geometry of a CATPart.

Write the modifications back to Teamcenter with the *Synchronization in Teamcenter* icon .

The following dialog will appear, showing which changes need to be written to Teamcenter:

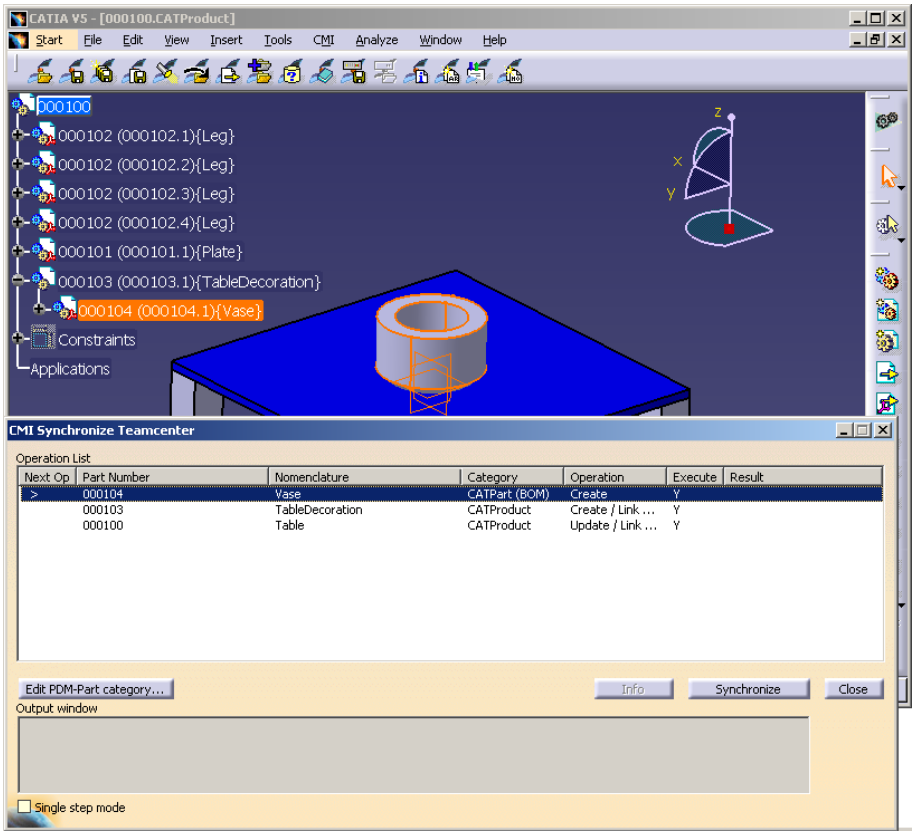

Figure 69: The Synchronize Teamcenter dialog

The dialog's *Operation* column shows which procedures need to be performed in Teamcenter for each object and may be a combination of the following:

Update	The file and positional changes of any children will be updated in Teamcenter.
Create	The object will be created in Teamcenter. The object is completely new and not already in Teamcenter.
Link Child	At least one new parent-child relation will be created in Teamcenter. This reflects the addition of a child product in CATIA.
Drop Child	At least one parent-child relation will be deleted in Teamcenter. This reflects the deletion of a child product of the object in CATIA.

The column *Execute* shows whether the operation will be executed or not. If there is any reason why the operation cannot be executed, then the reasons will be shown in the *Result* column.

If new geometry files are to be created in Teamcenter the default is *BOM Type*. This will become an item and a dataset in Teamcenter.

With the *Edit PDM-Part category…* button the category can be changed to *No BOM Type* in the *Edit new PDM-Part category* dialog (see Figure 70). This file will become a dataset in Teamcenter and will be attached to the parent item.

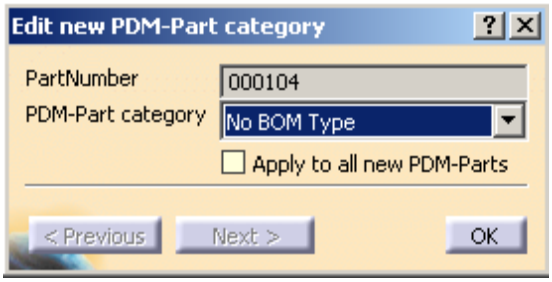

Figure 70: Edit new PDM-Part category dialog

If the *Synchronize* button is pressed, the list of executable operations is worked through in the order shown on the screen.

The results from Teamcenter are shown in the Output Window below the list.

The *Update* operation:

CATIA File objects will be updated in Teamcenter. No user interaction is necessary.

The *Create* operation:

CATIA File objects will be created in Teamcenter and the following steps will be completed:

- A Teamcenter item will be created.
  The created item is also linked to the user's Newstuff Folder (can be configured).
- A dataset will be created under the item.
  The created dataset is also linked to the user's Newstuff Folder (can be configured).
- The file will be imported in the dataset as Named Reference with the correct type (CMI2Part, CMI2Product, etc.).

For the interactive create in Teamcenter please see the remark below.

The *Link Child* operation:

- This may only appear as an operation for *CATProduct* objects, as CATParts cannot contain sub-products. In Teamcenter any new children will be added to the Teamcenter item of the parent object by creating a new BOM Line.

The *Drop Child* operation:

- This may only appear as an operation for *CATProduct* objects, as CATParts cannot contain sub-products. In Teamcenter any child CATProducts deleted from the CATIA product structure will be detached from the Teamcenter item of the parent object by removing the BOM Line.

After every operation the success or failure will be registered in the *result* column of the dialog. If an operation fails the output window will provide you with the cause of the failure.

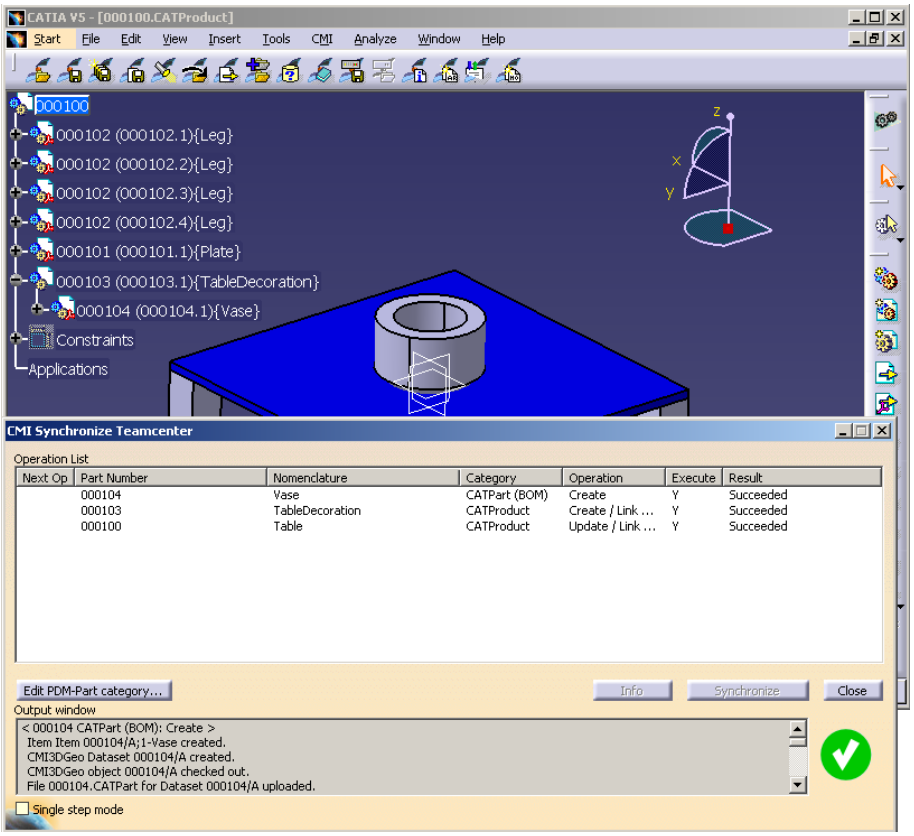
CATIA V5 - [000100.CATProduct]
Start File Edit View Insert Tools CMI Analyze Window Help
000100
000102 (000102.1){Leg}
000102 (000102.2){Leg}
000102 (000102.3){Leg}
000102 (000102.4){Leg}
000101 (000101.1){Plate}
000103 (000103.1){TableDecoration}
000104 (000104.1){Vase}
Constraints
Applications
CMI Synchronize Teamcenter
Operation List
Next Op | Part Number | Nomenclature | Category | Operation | Execute | Result
000104 | Vase | CATPart (BOM) | Create | Y | Succeeded
000103 | TableDecoration | CATProduct | Create / Link ... | Y | Succeeded
000100 | Table | CATProduct | Update / Link ... | Y | Succeeded
Edit PDM-Part category...
Info
Synchronize
Close
Output window
< 000104 CATPart (BOM): Create >
Item Item 000104/A;1-Vase created.
CMI3DGeo Dataset 000104/A created.
CMI3DGeo object 000104/A checked out.
File 000104.CATPart for Dataset 000104/A uploaded.
Single step mode

Figure 71: The Synchronization in Teamcenter dialog with success

The Teamcenter item can be created interactively by filling the attributes in a dialog. This has to be switched on with the CMI RII preference *CMICreateItemInteractive=1*. The interactive create is possible for datasets, too (set the CMI RII preference *CMICreateDatasetInteractive=1*).

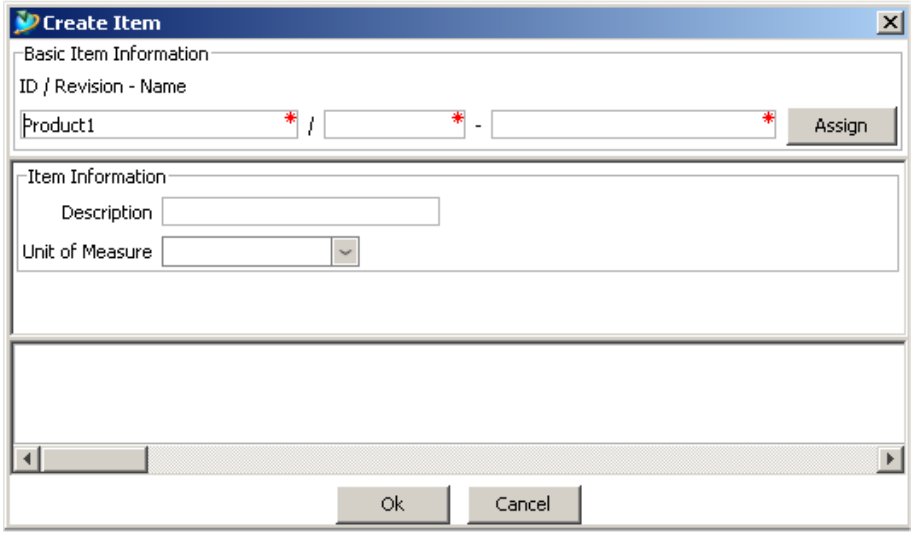

Figure 72: The Create Item dialog

It is possible to fill several forms for item and item revision in the create dialog. They are displayed in the sections “Item Form Information” and “Item Revision Form Information” in the dialog.

The create of the forms has to be configured in the CMI RII preferences *CMICreateItemItemFormList* and *CMICreateItemItemRevisionFormList*. For details please refer to the *CATIA Teamcenter Interface RII Customizing Manual*.

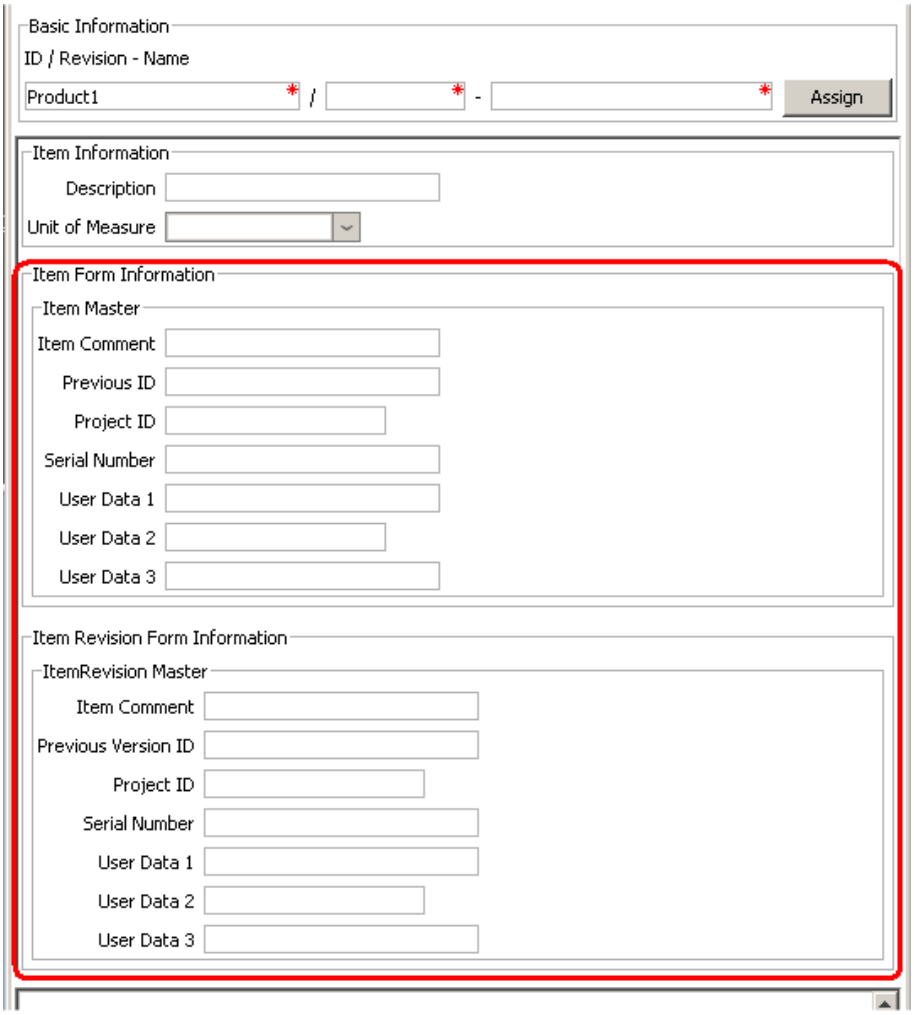

Figure 73: The Create Item dialog with forms

It can be configured to have the possibility to select the item type of the create item dialog from a set of possible item types. For this you have to set the CMI RII preference *CMISelectItemType=1* and to define the types in the CMI RII preference *CMICreateItemItemTypeList*.

Figure 74: Select the item type in the Create Item dialog

It is also possible to configure the create item and the create dataset dialog in that way that the values of the attributes – except the basic information attributes – will be stored and shown in the next dialog of the same type. You have to set the CMI RII preferences *CMICreateItemDialogRememberAttributes=1* and *CMICreateDatasetDialogRememberAttributes=1*.

Figure 75: Remember Attributes of the create dialog

CMI toolbar: Highlight in Workbench

If you want to highlight CATParts, CATProducts, and CATIA V4 models in the CMI RII application triggered by CATIA V5 perform the following steps.

In CATIA V5 select the CATIA objects you want to highlight in the CMI RII application and choose the *Highlight in Workbench* icon from the CATIA CMI toolbar.

Now the items are selected in the CMI RII application.

When the Structure Manager is active and the object is included in this window then it will be highlighted by the action above in CATIA V5. It is the same with the Multi-Structure Manager and the Manufacturing Process Planner application.

CMI toolbar: Browse in Teamcenter

This command allows to browse the Teamcenter object which is loaded in CATIA V5 in the Teamcenter client.

In CATIA V5 select the CATIA objects you want to browse in the Teamcenter client and choose the *Browse in Teamcenter* icon from the CATIA CMI toolbar.

Now the items are opened in the My Teamcenter application.

CMI toolbar: Creates/Attaches an Archive

This command is described in the section *Handling of CMIArchives* on page 77.

CMI toolbar: Get original geometry from Teamcenter

The *Get original geometry from Teamcenter* command retrieves geometry files (CATPart or CATIA V4 model) from Teamcenter if the geometry files are not yet loaded in CATIA V5.

A CATProduct, CATPart or CATIA V4 Model has to be selected in the product structure.

The function is used in context of huge product structures in CATIA to get the original geometry file from Teamcenter if the *Do not activate default shapes on open* option is set in the CATIA *Product Visualization* settings (see Figure 76).

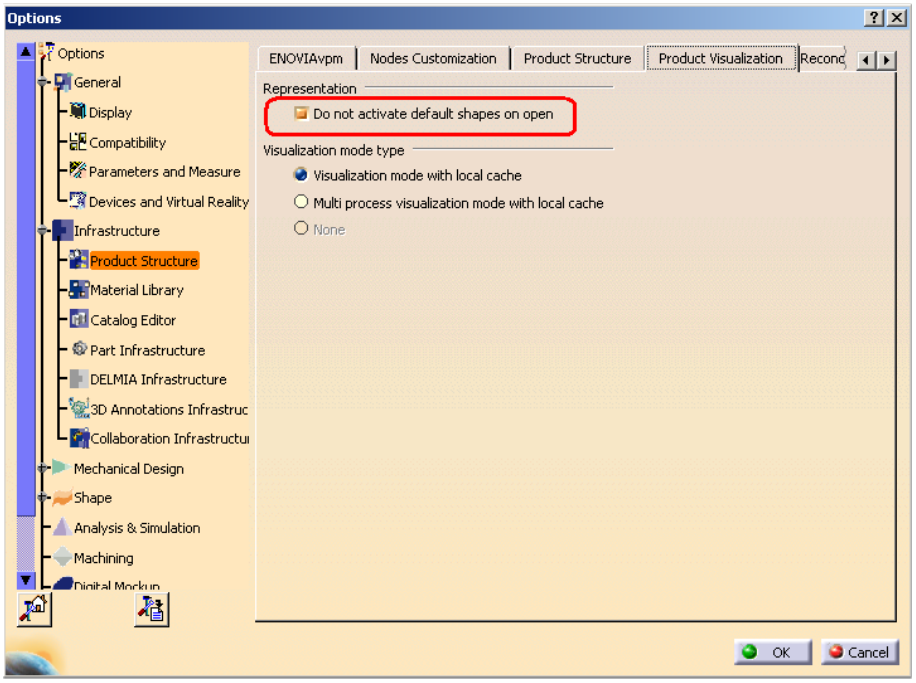

Figure 76: *Do not activate default shapes on open* option in CATIA V5

CMI toolbar: Insert from Teamcenter

The *Insert from Teamcenter* command allows the user to load a CMI structure under a selected product.

Read an assembly into CATIA V5 using the *Read from Workbench* command in CMI toolbar.

Select a product to be the root of the inserted structure.

In CATIA V5 select the *Insert from Teamcenter* icon .

Drop the assembly structure you want to use in CATIA V5 in the CMI RII application window. Expand it as necessary. Click *Tools→Insert/Replace To CATIA* in the menu or press the *Insert/Replace To CATIA* icon in the CMI RII toolbar in Teamcenter. Changes or expands you make to other assembly structures in the Workbench will not be sent to CATIA.

Alternatively you can drop the item into the Structure Manager, the Multi-Structure Manager or the Manufacturing Process Planner. There is only one root item. Expand it as necessary. Click *CMI RII→Insert/Replace To CATIA* in the menu.

Or you can select the item revision in the My Teamcenter application and click *CMI RII→Insert/Replace To CATIA* in the menu.

CATIA comes to the foreground with the selected product and the used structure.

The dropped part/structure is removed from the CMI RII application window after you sent it to CATIA.

Via *Synchronize* you can save the new Use-Relation in Teamcenter.

CMI toolbar: Replace from Teamcenter

The *Replace from Teamcenter* command allows the user to replace the selected item in the structure.

Read an assembly into CATIA V5 using the *Read from Workbench* command in CMI toolbar.

Select a product to be replaced in the structure.

In CATIA V5 select the *Replace from Teamcenter* icon .

Drop the assembly structure you want to use in CATIA V5 in the CMI RII application window. Expand it as necessary. Click *Tools→Insert/Replace To CATIA* in the menu or press the *Insert/Replace To CATIA* icon in the CMI RII toolbar in Teamcenter. Changes or expands you make to other assembly structures in the Workbench will not be sent to CATIA.

Alternatively you can drop the item into the Structure Manager, the Multi-Structure Manager or the Manufacturing Process Planner. There is only one root item. Expand it as necessary. Click *CMI RII→Insert/Replace To CATIA* in the menu.

Or you can select the item revision in the My Teamcenter application and click *CMI RII→Insert/Replace To CATIA* in the menu.

CATIA comes to the foreground and asks if you want to replace all instances of the selected item or only the selected instance of the item. Then you see the changed structure.

The dropped part/structure is removed from the CMI RII application window after you sent it to CATIA.

Via *Synchronize* you can save the changed structure in Teamcenter.

CMI toolbar: Add Temp

The *AddTemp* command allows the user to visualize a temporary structure together with the working one.

For example, if the user is making a design of a car and wants to see if the luggage boot is big enough, he can load a suitcase as a temporary structure by doing the following (supposing that the car structure is already loaded):

In CATIA V5, go to *Tools→Options→Compatibility* (Tab: "CMI") and make sure that the option "Use one temporary product window…" is checked.

Read an assembly (here the car assembly) into CATIA using the *Read* command in CMI toolbar.

In CATIA V5 select the *AddTemp from Teamcenter* icon .

Drop the assembly or model you want to add temporarily to CATIA (the suitcase) into the CMI RII application. Expand it as necessary. Click *Tools→Temp To CATIA* in the menu or press the *Temp to CATIA* icon in the CMI RII toolbar in Teamcenter. Changes or expands you make to other assembly structures in the CMI RII application will not be sent to CATIA.

Alternatively you can drop the item into the Structure Manager, the Multi-Structure Manager or the Manufacturing Process Planner. There is only one root item. Expand it as necessary. Click *CMI RII→Temp To CATIA* in the menu.

Or you can select the item revision in the My Teamcenter application and click *CMI RII→Temp To CATIA* in the menu.

CATIA comes to the foreground with both the original and temporarily added structures loaded in the same window – here the car and the suitcase structure.

It will not be possible to make any changes to the temporarily added (suitcase) structure.

The temporarily added part/structure is removed from the CMI RII application after you sent it to CATIA.

All Part Numbers and File Names in the temporarily added structure are prefixed with "TMP#_", where "#" is a counter in CATIA V5, beginning with 1. Every *AddTemp* will increase the counter. This prefix is customizable by the customer.

Limitation:
CATProducts are not transferred to CATIA, the products will be represented by "CATIA Components". Only position information from Teamcenter is processed.

Visualize multiple revisions of an Assembly using Add Temp

Add Temp in CATIA V5 can be used to load different versions (revisions) of an assembly or model at the same time. In order to make this possible, the Part Numbers and File Names of the temporarily added assembly are prefixed with "TMP#_".

In CATIA V5, go to *Tools→Options→Compatibility* (Tab: "CMI") and make sure that the option "Use one temporary product window…" is checked.

Read revision B of your assembly as described in *CMI toolbar: Read From Workbench*.

You will find that it is opened in CATIA underneath a product tagged "CMI Workbench".

In CATIA V5 select the *Add Temp from Teamcenter* icon .

Find and expand Revision A of your assembly (drop it in the CMI RII application window and use the *Expand Below* command in Teamcenter). Click *Tools→Temp*

To CATIA in the menu or press the *Temp to CATIA* icon in the CMI RII toolbar in Teamcenter. Changes or expands you make to other assembly structures in the Workbench will not be sent to CATIA.

Alternatively you can drop the item into the Structure Manager, the Multi-Structure Manager or the Manufacturing Process Planner. There is only one root item. Expand it as necessary. Click *CMI RII→Temp To CATIA* in the menu.

Or you can select the item revision in the My Teamcenter application and click *CMI RII→Temp To CATIA* in the menu.

Revision A and B of your assembly are opened in the same Window in CATIA V5. You can overlay and position the assemblies relative to each other for comparison.

CMI toolbar: Compare Version

Similarly to *Add Temp*, *Compare Version* is used to load different versions of the same assembly. However in this case, the version that is already open is read only and the version that is added can be modified.

In CATIA V5, go to *Tools→Options→Compatibility* (Tab: "CMI") and make sure that the option "Use one temporary product window…" is checked.

Read revision A of your assembly as described in *CMI toolbar: Read From Workbench*.

You will find that it is opened in CATIA underneath a product tagged "CMI Workbench".

In CATIA V5 select the *Compare Version* icon .

Notice that Revision A is renamed with the "TMP#_" prefix. Revision A can no longer be modified and saved in Teamcenter.

Find and expand Revision B of your assembly. Use *Send To CATIA*.

Revision A and B of your assembly are opened in the same Window in CATIA V5. You can overlay and position the assemblies relative to each other for comparison.

Use *Synchronize Teamcenter* to update Revision B of the assembly. Notice that Revision A and all it referenced files are ignored and will not be modified in Teamcenter.

CMI toolbar: Build Visualization

The *Build Visualization* command builds up or updates a visualization file from a selected product and stores the visualization under the selected item. These cgr can then be created/updated with the CMI Synchronize command.

The Visualization files are only sent to CATIA if the preference *Send visualization files to CATIA?* is checked, or if the *Expand for Visualization* command in the context menu of the CMI RII application is used for expand.

CMI RII does not control the content or actuality of the visualization file.

CMI toolbar: Reconnect with Teamcenter

CMI recognizes files that have been loaded into CATIA V5 through the CMI RII application window. Since it knows that they are from Teamcenter, it can update them there.

Other files, which you load with e g. *File→Open*, it will not know. They will be regarded by *Synchronize* as new files, and it will create new Teamcenter objects for them.

If you open a product structure from disk that contains files that are already in Teamcenter, you can use *Reconnect with Teamcenter* to make CMI RII recognize these files. It will recognize products if the part number is correct, and CATPart/model files based upon their filename. If the CATPart is a BOM CATPart (Component) in Teamcenter, the part number must also match.

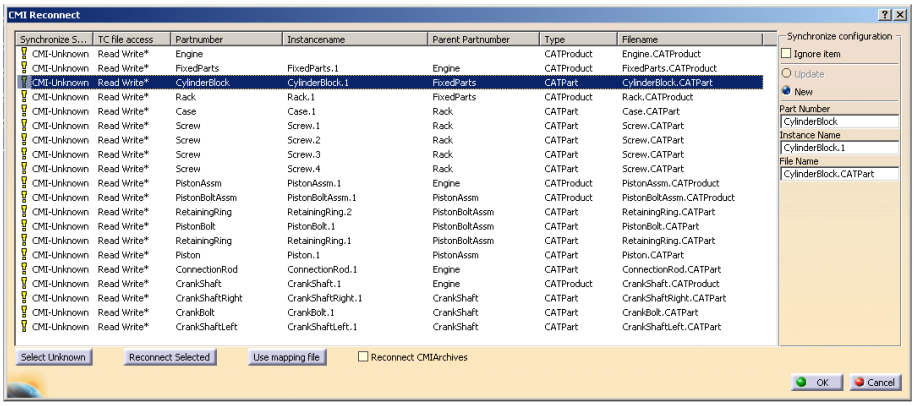

Figure 77: Reconnect dialog

These are the possible Synchronize Status:

CMI-Unknown	CMI does not know this item at all. It would be created as a new part in Teamcenter.
Can be reused	CMI knows this item is in Teamcenter. But it appears that in Teamcenter there is no instance known by the same instance name under the same parent item. Maybe it was deleted or is new. Synchronize would create a new instance of the existing Part in Teamcenter.
Can be updated	CMI knows the object as well as this instance is in Teamcenter. It can be updated in Teamcenter.
Can not be updated	CMI knows the object as well as this instance is in Teamcenter, but it is not writeable and cannot be updated in Teamcenter.
Archive content	The object is part of a CMIArchive.
Broken Link	A broken link cannot be reconnected. It will be ignored during synchronize.

An asterisk (*) in the Synchronize Status column signifies that the Reconnect Dialog recognized the item, but it is not yet reconnected. Items are actually reconnected when you close the dialog with *OK*.

Click *Cancel* to keep them as unknown, e.g. if you want to save them as new Teamcenter objects.

Reconnect does not create anything in Teamcenter or updates any files.

Please use *Synchronize* to update the data.

Load a CATProduct into CATIA V5 using *File→Open*.

In CATIA V5 select the *Reconnect with Teamcenter* icon .

In the CMI Reconnect Dialog, click *Select unknown*. In this case, all lines will be selected. Click *Reconnect selected*. If any items are recognized in Teamcenter, they will change their status. To reconnect these items, close the dialog with *OK*. Click *Cancel* to leave the dialog without reconnecting the items.

Reconnected items that are writeable in Teamcenter will be in the "modified" state, to be able to update them in Teamcenter.

Use *Synchronize* to create the unknown/new data and to update the reconnected files.

If you want to keep individual items as new, unselect them before you click *Reconnect selected*.

Use mapping file
If a mapping file was created when the product structure was first imported into Teamcenter, this file can be used to map the CATIA names to the names the products have in Teamcenter. Click the *Use mapping file* button to retrieve a mapping file that is attached to the top level Item from Teamcenter and map between external names and Teamcenter names.

Import/Export using mapping files needs to be enabled by your CMI administrator. See Optional CMI Functionality on page 108.

Reconnect CMIArchives
By default, Reconnect does not search Teamcenter for CMIArchives to reconnect a CATProduct. Check *Reconnect CMIArchives* to also search for CMIArchives. Keep in mind, however, that several different Archives can contain a root product with the same part number or file name. If this is the case, you will be asked to select one of these.

Synchronize Configuration
Here you can control for individual files how they should be treated during Synchronize, as well as how they are going to be reconnected.

Update/New
In order to be updateable, a file has to be connected with Teamcenter. If the file is connected, but you rather want to store it as a new file, click *New* to disconnect the file, so that it will be created as a new object in Teamcenter during Synchronize. The same allows to copy a part or data item that you have originally opened from Teamcenter.

Ignore
Ignore this item in Synchronize (neither create a new item nor update).

Part number, Instance name, File name
If the file is archived in Teamcenter under a different name than it has in CATIA, you can suggest the name here. It will take the place of the name in CATIA when Teamcenter is searched for the item.

CMI toolbar: Manage Catalogs

This command is described in the section *Handling of catalogs* on page 70.

CMI toolbar: Local Save and Restore

Using *Save Local* the content of the CATIA V5 session can be stored locally.

This snapshot of the session will persist even when CATIA V5 is closed.

When the session is restored with *Restore Local*, you can continue your work as if you had just used *Read from Teamcenter*, i.e. you can perform Updates.

The *Restore Local* command is only available when the CATIA is empty – i.e. no documents are open – to avoid conflicts.

With *Save/Restore Local* you can avoid reading large assemblies from Teamcenter repeatedly. However, the status of the data in Teamcenter may change if you keep your local snapshot for a long time. It may get "stale".

The following restrictions apply:

- Only one saved session is maintained at a time.
- The session can only be saved when the data is up to date. I.e. there are no files in a modified state, and no new files.
- The *Save/Restore Local* does not restore files that were not loaded from the PDM system.

CMI toolbar: CMI Info

This command displays the information from Teamcenter for CATParts, CGRs, CATProducts, CATDrawings, cgms, and CATIA V4 Models.

The *More …* button displays attributes of the correspondent Teamcenter objects. The range of attributes can be customized.

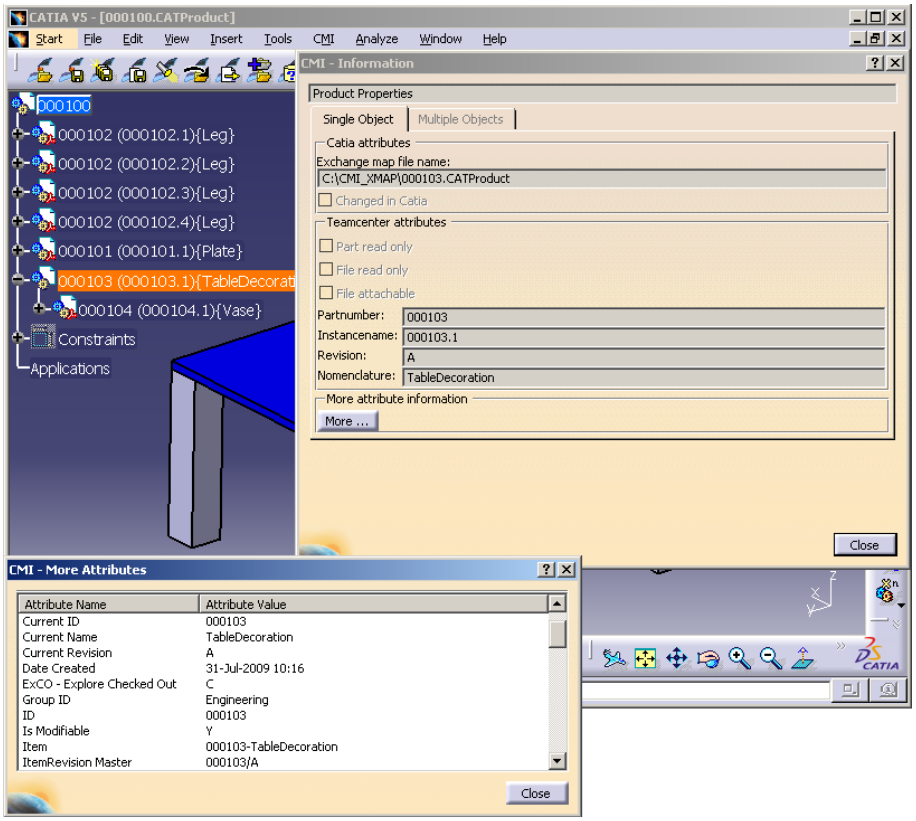

Figure 78: Information dialog window for CATProduct with “More Attributes”

Select the CATPart, CATProduct, CATDrawing, cgm or CATIA V4 Model.

In CATIA V5 select the *CMI Info* icon . The appropriate dialog info window appears.

You can also select multiple CATIA items. Information will be displayed in a table view.

Then you can select a line and switch to the "Single Object" tab. There the attributes are shown.

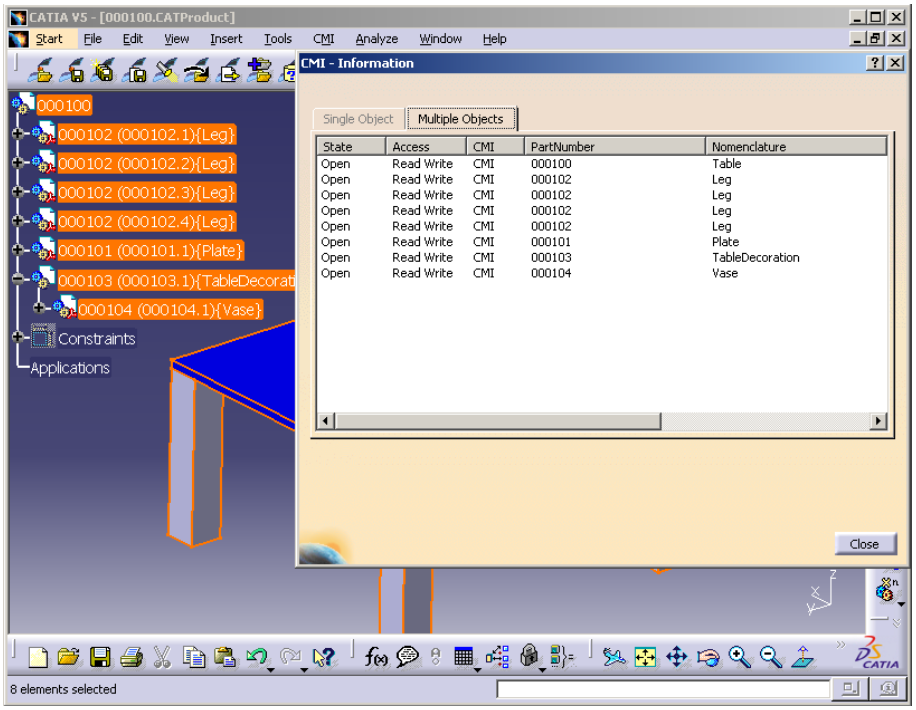

Figure 79: CMI Information for multiple items

CMI toolbar: Check In/Check Out

This function is used to check in and check out datasets from the CATIA V5.

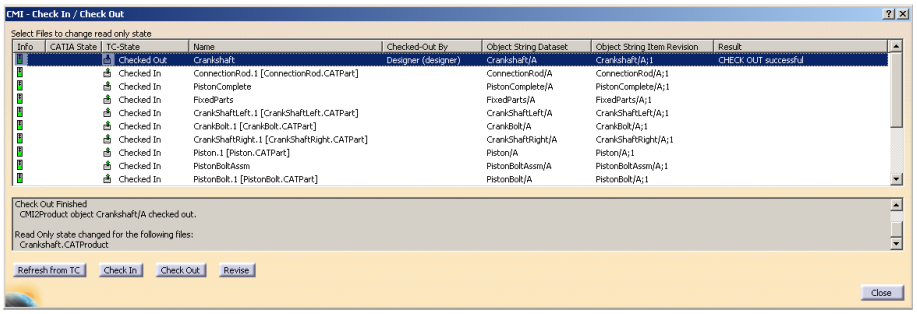
CMI - Check In / Check Out
Select Files to change read only state
Info CATIA State TC-State Name Checked-Out By Object String Dataset Object String Item Revision Result
Checked Out Crankshaft Designer (designer) Crankshaft/A Crankshaft/A;1 CHECK OUT successful
Checked In ConnectionRod.1 [ConnectionRod.CATPart] ConnectionRod/A ConnectionRod/A;1
Checked In PistonComplete PistonComplete/A PistonComplete/A;1
Checked In FixedParts FixedParts/A FixedParts/A;1
Checked In CrankShaftLeft.1 [CrankShaftLeft.CATPart] CrankShaftLeft/A CrankShaftLeft/A;1
Checked In CrankBolt.1 [CrankBolt.CATPart] CrankBolt/A CrankBolt/A;1
Checked In CrankShaftRight.1 [CrankShaftRight.CATPart] CrankShaftRight/A CrankShaftRight/A;1
Checked In Piston.1 [Piston.CATPart] Piston/A Piston/A;1
Checked In PistonBoltAssm PistonBoltAssm/A PistonBoltAssm/A;1
Checked In PistonBolt.1 [PistonBolt.CATPart] PistonBolt/A PistonBolt/A;1
Check Out Finished
CMI2Product object Crankshaft/A checked out.
Read Only state changed for the following files:
Crankshaft.CATProduct
Refresh from TC
Check In
Check Out
Revise
Close

Figure 80: Check In/Check Out dialog

The dialog shows the following:

- Info
  Shows the modification state in CATIA as icon.
- CATIA State
  Shows the modification state in CATIA.
- TC-State
  Shows the check in/check out, revise state of the dataset in Teamcenter.
- Name
  Shows the name of the object.
- Result
  Shows the result for the last action for the file.

Additional columns can be configured in CATIA and the values for these attributes will be sent from Teamcenter. Details please see in the *CATIA Teamcenter Interface RII Customizing Manual*. In Figure 80 the columns “Checked-Out By”, “Object String Dataset”, and “Object String Item Revision” are configured.

The following actions are possible:

- Refresh from TC
  Refresh the information from Teamcenter.
- Check In/Check Out
  Before performing the *Check In*/*Check Out* action, the user has to select the files to be checked in/checked out.
- Revise (see Dataset pseudo Revise on page103)
  Before performing the *Revise* action, the user has to select the files to be revised.

Handling of CATDrawings

CATDrawings can be included in your assembly structures in Teamcenter. All the usual functions (Read, Update, Create and Save As) are supported for CATDrawings in CATIA V5 via the CMI toolbar.

CATDrawings may be created for single models or for assemblies. There are however several caveats when working with CATDrawings and CMI, depending on the context of the CATDrawing.

Creating a CATDrawing from a Single Model

When creating a CATDrawing for a CATPart, send the CATPart item from Teamcenter to CATIA V5, and then create the CATDrawing. This method will preserve the context of the CATDrawing - irrespective of whether the CATPart is later loaded into CATIA singly or as part of an assembly. If you later make changes to the CATPart, and you wish the CATDrawing to update and reflect the changes, you must load both the CATPart and the CATDrawing in CATIA V5 using CMI before you update the CATDrawing.

Drag and drop the CATPart item on the CMI RII application or use *Send To→CMI RII* with the CATPart Item.

Select *Tools→Send To CATIA* or use the *Send To CATIA* icon in the CMI RII toolbar in Teamcenter.

Create the CATDrawing with the usual CATIA V5 functions.

Select the *Synchronize in Teamcenter* icon .

Creating a CATDrawing from a Product Structure

Drag and drop the assembly into the CMI RII application.

Select *Tools→Send To CATIA* or use the *Send To CATIA* icon in the CMI RII toolbar in Teamcenter.

Create the CATDrawing with the usual CATIA V5 functions.

Select the *Synchronize in Teamcenter* icon .

Derived files for CATDrawing

In the Teamcenter preference *CMIDrawingFileFormatsList* you can define the formats of the files that should be derived from the CATDrawing when it is created or updated in Teamcenter. Possible values are “pdf” and “tif”.
The dataset names for CATDrawing, pdf, and tif are the same.
For the pdf format, there will be one file including one page for each sheet.
For the tif format, there will be one file for each sheet. The sheet name will be stored in the description of the dataset.
When the CATDrawing dataset is related to an item revision then the datasets for pdf and tif are related to this item revision, too. The names of the datasets are derived from the part number and revision of the item revision.
When the CATDrawing dataset is not related to an item revision then the datasets for pdf and tif are created without relation. The names of the datasets are derived from the file name in CATIA (without revision).
There exists no relation between the datasets for CATDrawing, pdf, and tif.
The standard Teamcenter datasets for pdf (“PDF”) and tif (“TIF” for TC 8.3 and above; “Image” for TC 2007.2) will be used.

Automatic Update of CATDrawing title block parameter

CMI RII can automatically update text fields in the drawing title blocks with attributes from Teamcenter. This requires a configuration in Teamcenter.

Use *Edit→Options* to open the Teamcenter preferences dialog.

Switch to the index tab and check the following preferences:
- **`CMIDrawingParameterAttributesTC`**
- **`CMIDrawingParameterAttributesCATIA`**

(see Figure 81).

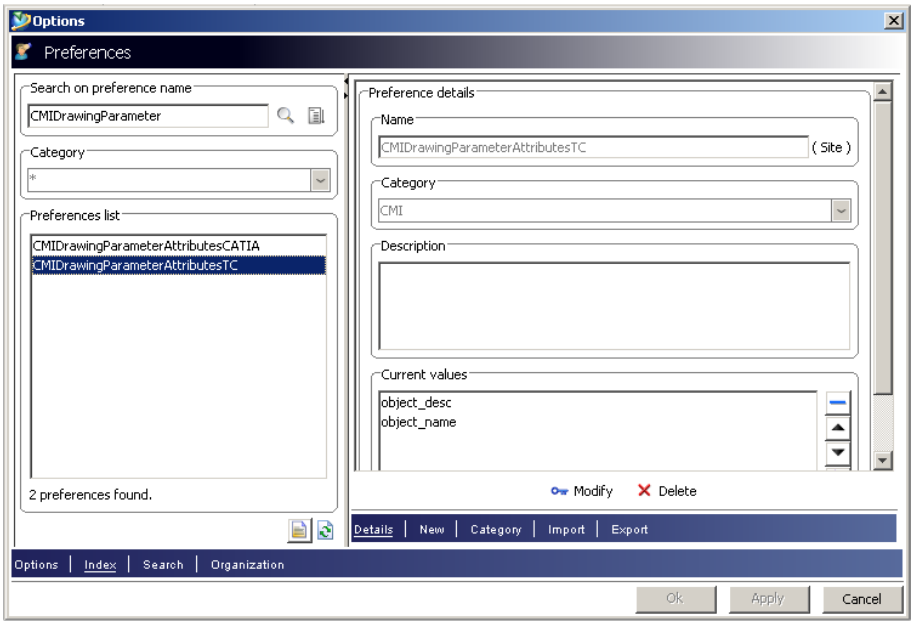

Figure 81: Options Dialog in Teamcenter

`CMIDrawingParameterAttributesTC` defines a list of Teamcenter attribute names of the dataset object in Teamcenter.

Example:

```
object_desc
```

`object_name`

`CMIDrawingParameterAttributesCATIA` defines the parameter names in CATIA.

Example:

```
PdmDescription
PdmName
```

These two lists must have the same length.

In CATIA the Knowledgeware Parameters can be defined in the CATDrawing object.

With the *Attribute Link* command in CATIA these parameters can be connected to text fields in the CATDrawing.

CMI RII will update the Knowledgeware Parameters in the CATDrawing document.

With the example values above the `object_desc` attribute of the CMI2Drawing dataset is read in Teamcenter and set in the PdmDescription parameter in CATIA (see Figure 82) and the `object_name` attribute of the CMI2Drawing dataset is read in Teamcenter and set in the PdmName parameter in CATIA.

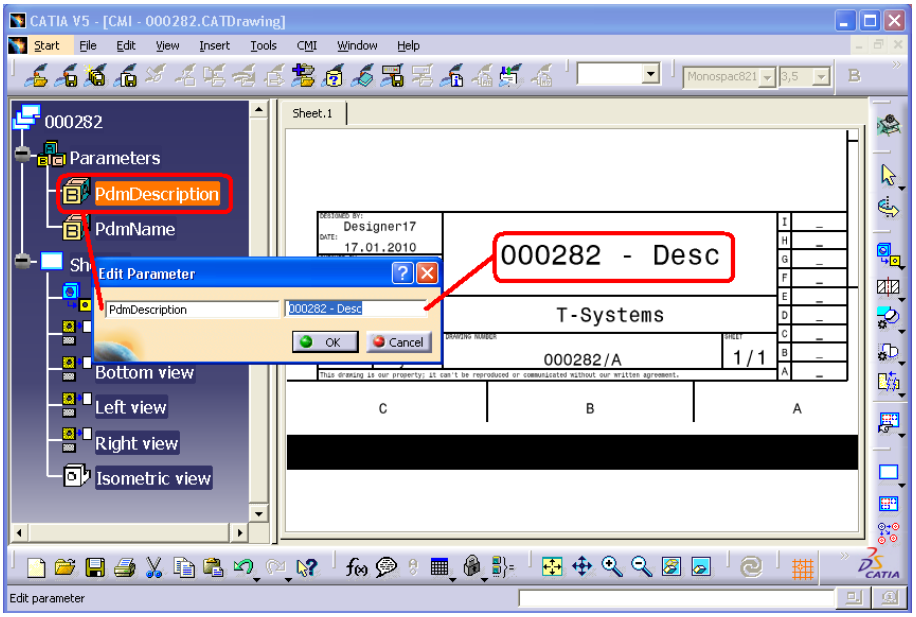

Figure 82: CATDrawing Parameter in CATIA V5

With the *CMIRead* command the parameters are updated in the CATDrawing document in CATIA.

Handling of cgm files

CATIA V5 cgm files are managed like the CATDrawings in CMI RII.

A newly created or opened cgm file can be created in Teamcenter with the *Synchronize* of CMI RII. There will be created a dataset with the named reference of the cgm file. The relation to an item revision has to be created manually because there is no reference to an item.

The usual functions (Read, Update, and Save As) are supported for cgm files in CATIA V5 via the CMI toolbar.

When cgm files are included in your product structure in Teamcenter and this structure is read in CATIA, the cgm file will be opened in a separate window. It can be configured in the CMI RII options (see Figure 7) not to send the cgm file to CATIA.

Handling of cgr and model files

CATIA V5 cgr files and CATIA V4 Model files are managed as representation of an embedded component in the product structure. It is not possible to modify such a representation directly. It is only possible to use the *Save As* function of CATIA V5 to create a new cgr or model file of a loaded CATPart or CATProduct. To update the representation you have to replace the original representation by the new representation.

Load an assembly which uses a cgr or model in the product structure. And use the right click *Representations→Manage Representations …* command (see Figure 83).

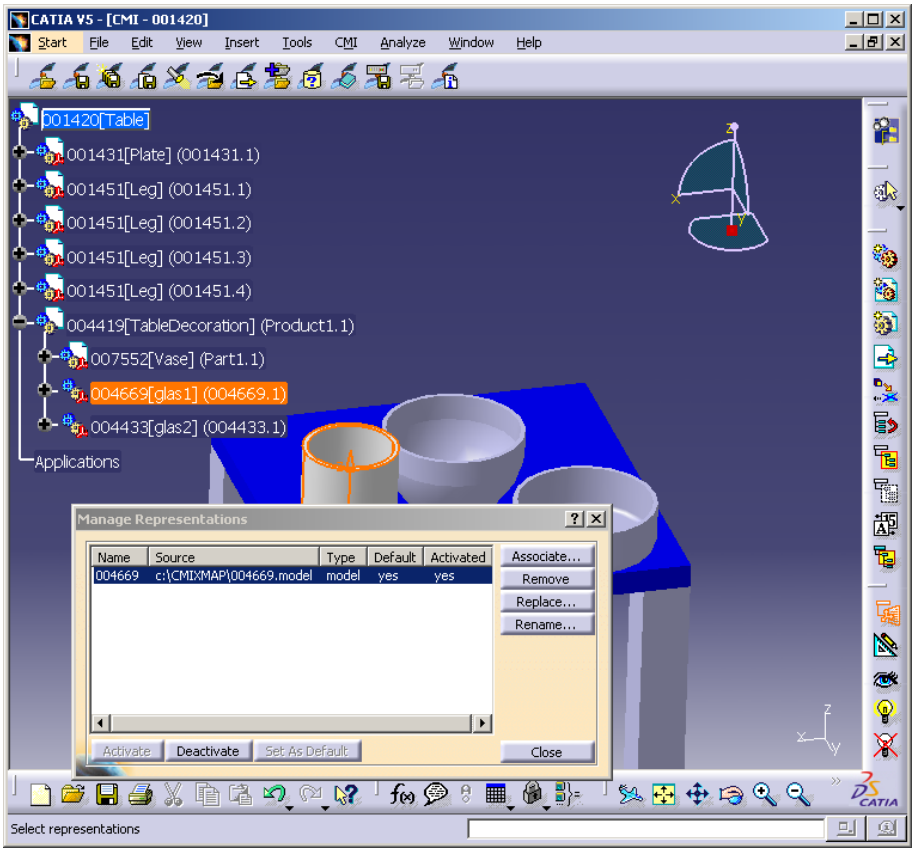

Figure 83: Manage Representation dialog of CATIA V5

Use the “Replace” function to use the cgr or model file with a new representation.

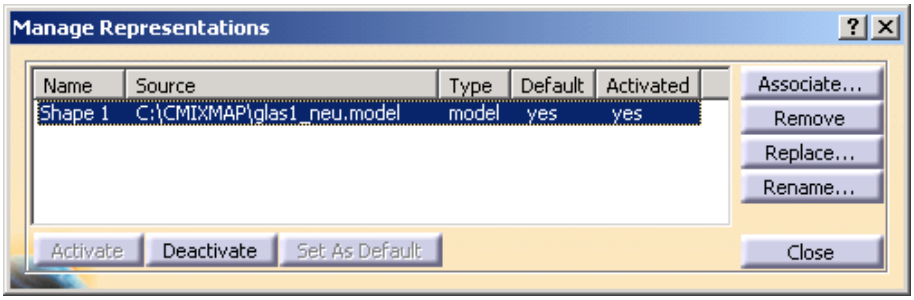

Figure 84: Manage Representation dialog of CATIA V5 with new model file

Use the CMI *Update* or *Synchronize* functionality to update the new cgr or model file in Teamcenter.

During the CMI *Update* or *Synchronize* process CMI replaces the original representation file in the exchange directory by the new representation file and changes the “Source” path of the representation back to its original value. Then the new representation file (which has the name of the old file) is updated in Teamcenter.

To use this function you need write access to the cgr or model data item in Teamcenter. Although the cgr or model is represented in an embedded component of a higher CATProduct you need no write access to the CATProduct.

Restrictions:
- There must be only one representation in one component.
- The “Name” of the representation must not change.

Handling of catalogs

CMI can also manage catalog files in Teamcenter. Teamcenter compatible catalogs reference files and items that are actually stored in Teamcenter. If the user opens or inserts a file from the catalog, CMI retrieves the corresponding data from Teamcenter and starts the defined catalog function (see section *Update or Create Catalog* for function details) with the retrieved file(s).

Manage Catalogs

The *Manage Catalogs* icon is enabled when you have a CATProduct active. It allows retrieving catalogs from Teamcenter for browsing.

After starting the *Manage Catalogs* command the *Select Catalog for browsing* dialog will be opened in CATIA.

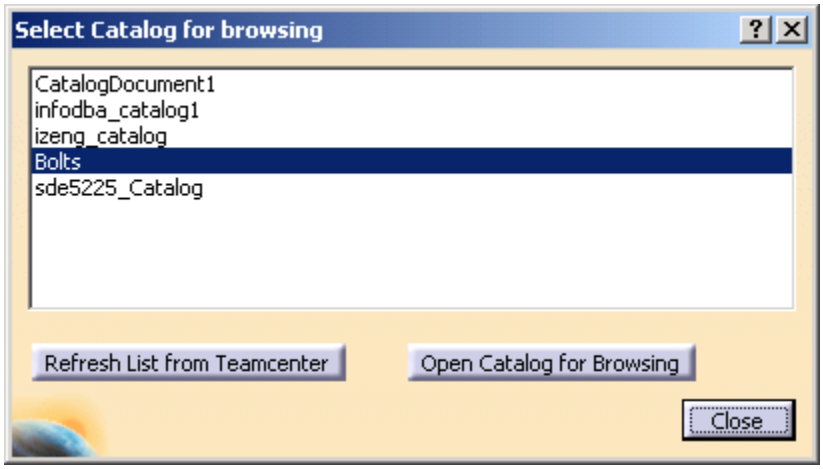

Figure 85: Select Catalog for browsing dialog

Pick from the list of catalogs available in Teamcenter and select the *Open Catalog for Browsing* button. The catalog will be opened in a CATIA Catalog browser.

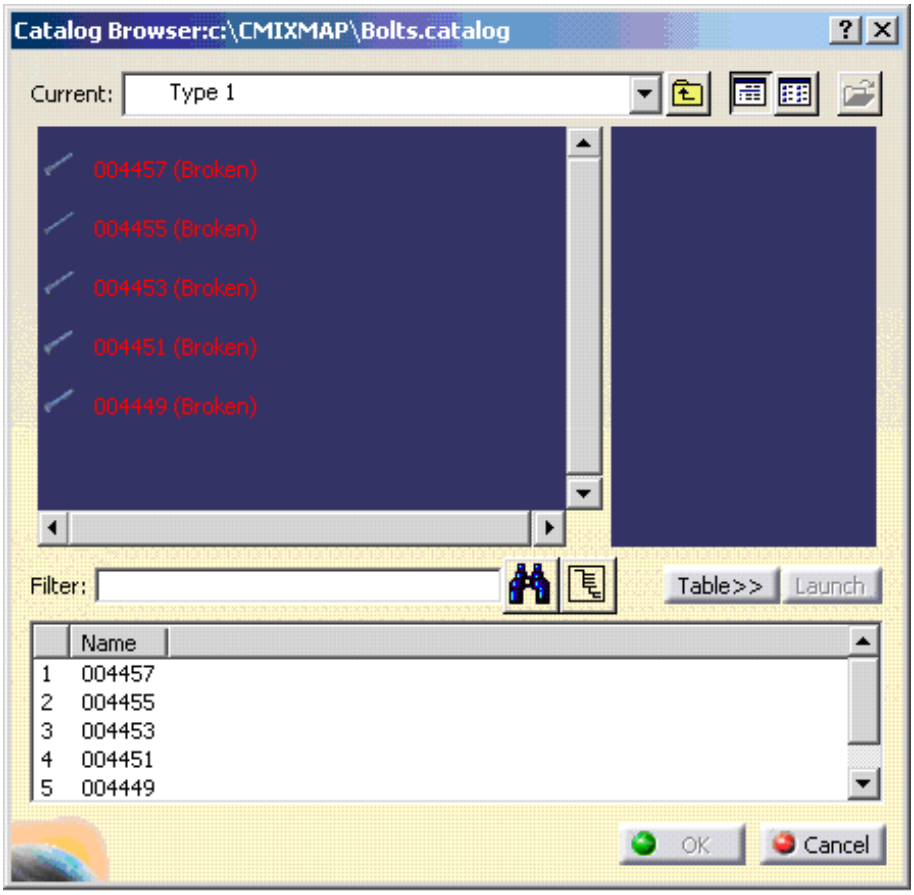

Figure 86: Bolt Catalog opened in CATIA V5

Double click an end chapter to open the item from Teamcenter. CMI RII will load the required files from Teamcenter if needed.

You cannot use *Open Document* or *Open As New Document* in this context.

Read Catalog

The administrator needs to set `CMI_ENABLE_CMICATALOGREADCMD=ON` in the CATIA environment in order to enable the *Read Catalog* function.

The *Read Catalog* icon is enabled when you have a CATProduct active. It allows you to retrieve catalogs from Teamcenter for editing.

After starting the *Read Catalog* command the *Select Catalog for editing* dialog will be opened in CATIA. *Read Catalog* allows to retrieve CATCatalogs from Teamcenter for editing.

Only catalogs with write access in Teamcenter will be retrieved from Teamcenter.

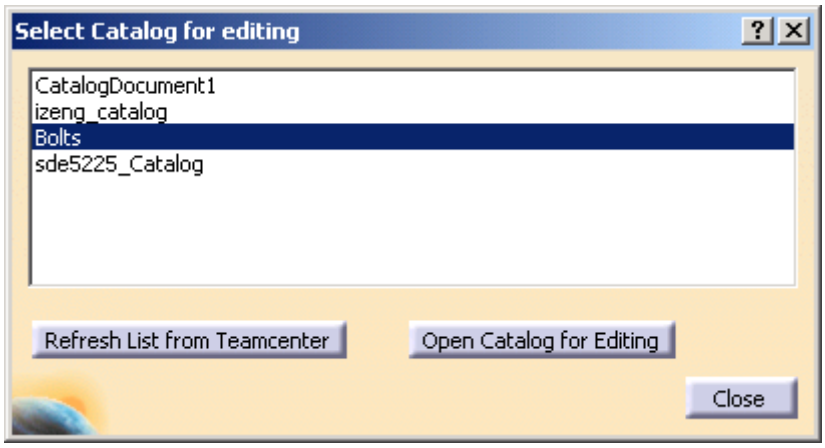

Figure 87: Select Catalog for editing dialog

Pick from the list of catalogs available in Teamcenter and select the *Open Catalog for Editing* button. The catalog document will be opened in a CATIA catalog editor.

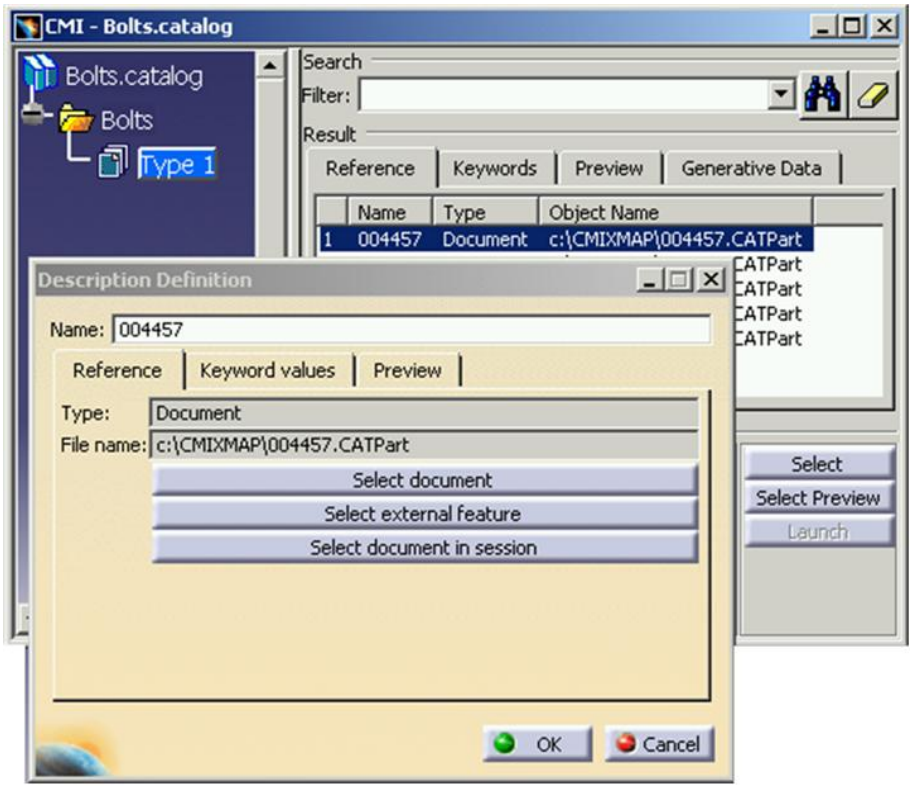

Figure 88: Edit catalog in CATIA V5

Use the *Select document in session* button to build the catalog from parts or files that were opened from Teamcenter via CMI.

Insert CATScript into Catalog

The administrator needs to set `CMI_ENABLE_CMICATALOGINSERTSCRIPTCMD=ON` in the CATIA environment in order to enable the *Insert CATScript from Teamcenter into Catalog* function.

The *Insert CATScript from Teamcenter into Catalog* icon is enabled when you have opened a catalog for editing.

Use *Read Catalog* to retrieve a catalog from Teamcenter for editing. Select an end chapter. Click the *Insert CATScript from Teamcenter into Catalog* icon. The query dialog for script datasets will be opened (see Figure 89).

Only script datasets with a filled named reference will be queried in Teamcenter.

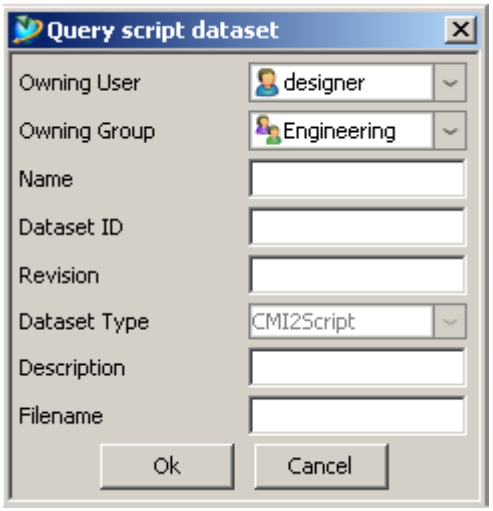

Figure 89: Query script dataset dialog

Fill the query criteria in the dialog. Owning User and Owning Group are filled with the current values of the session user. Select the “OK” button. The query result window opens. You have to select the dataset and click the “OK” button. With a click on the “New Query” button you can start a new query for script datasets.

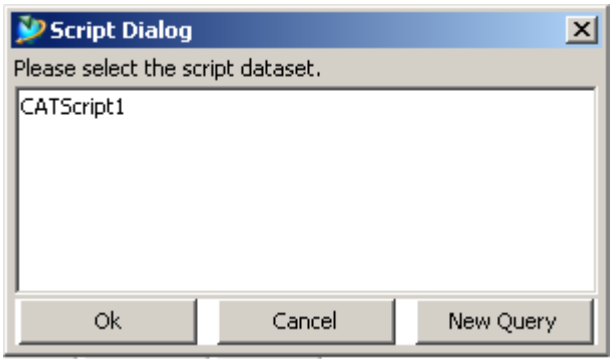

Figure 90: Query result dialog for script datasets

The script will be inserted into the catalog.

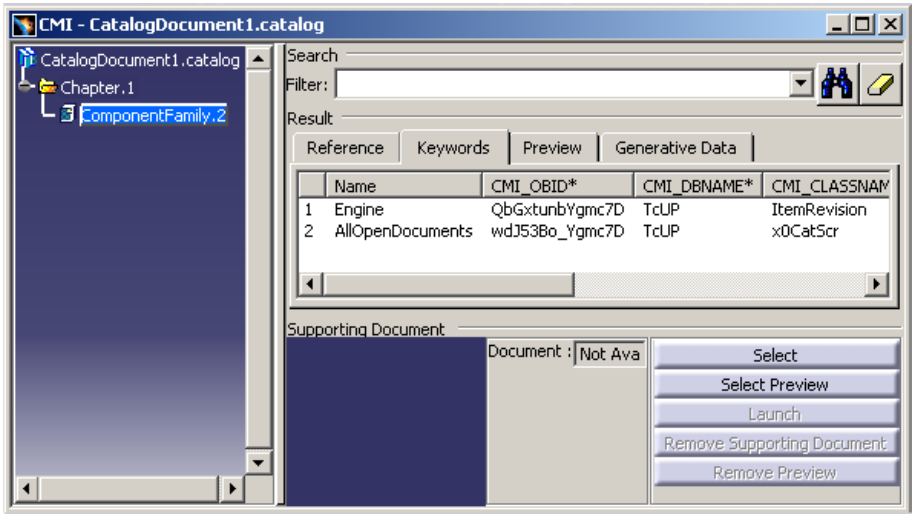

Figure 91: Catalog with inserted script

Update or Create Catalog

The administrator needs to set `CMI_ENABLE_CMICATALOGUPDCRECMD=ON` in the CATIA environment in order to enable the *Update or Create Catalog* function. The *Update or Create Catalog* icon is enabled when you have a catalog active.

Update or Create Catalog allows saving new or updated catalogs in Teamcenter. It will manage the necessary keyword attributes so that the items contained in the catalog can be retrieved from the Teamcenter database instead of the local file system.

After starting the *Update or Create Catalog* command the catalog document is analyzed and the following dialog is shown.

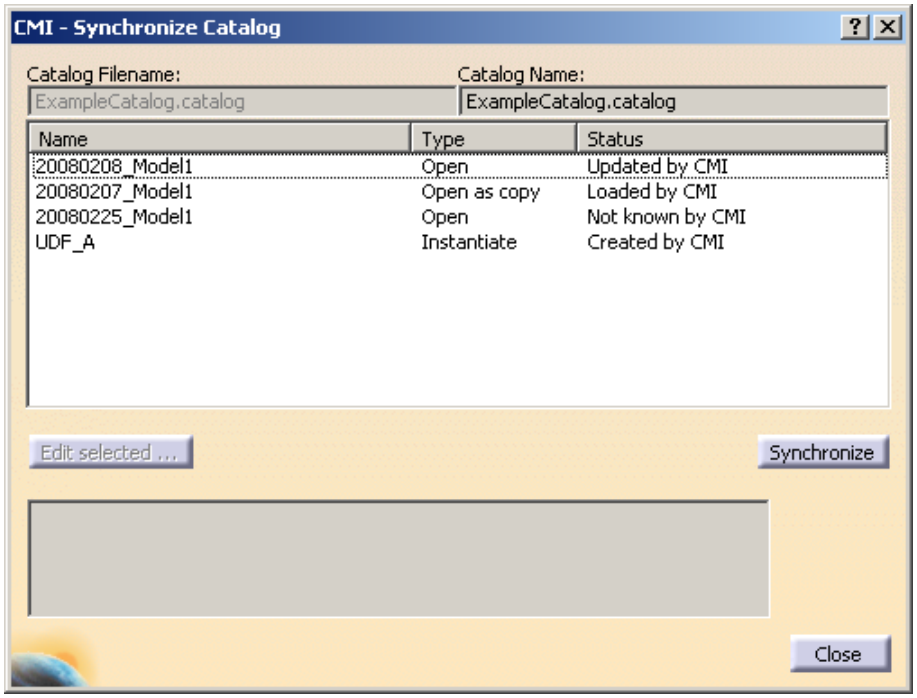

Figure 92: Synchronize Catalog dialog

For new catalogs that were not already opened from Teamcenter, the user can change the file name which should be used in Teamcenter.

The type can be **Open**, **Open as copy**, and **Instantiate**. These types describe the way in which the items will be handled when the catalog is used with the *Manage Catalogs* command.

Open	Open the referenced object in CATIA so that the existing Teamcenter item is used (e.g. standard part).
Open as copy	Open the referenced object in CATIA so that it will be recognized as a new item in Teamcenter (e.g. templates).
Instantiate	Instantiate is used for Features and Power copies which will be instantiated in the active document.

The Status Field can be **Loaded by CMI**, **Updated by CMI**, **Not known by CMI**,

and **Created by CMI**.

Loaded by CMI	The item is from Teamcenter and already was in the catalog at load time.
Updated by CMI	The item is from Teamcenter but the type was changed.
Not Known by CMI	The item is not from Teamcenter.
Created by CMI	The referenced file was opened from Teamcenter and is new in the catalog.

After pressing the *Synchronize* icon CMI will check all entries and if there are unknown entries, the user must confirm, that he wants to continue.

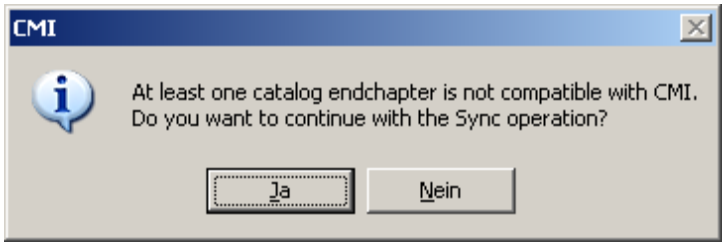

Figure 93: Confirmation dialog for unknown entries in the synchronize catalog command

This indicates that there is an item referenced in the catalog that is not managed by Teamcenter.

Next the catalog is registered or updated in Teamcenter.
Figure 94 is shown when the *Synchronize* command ends successfully.

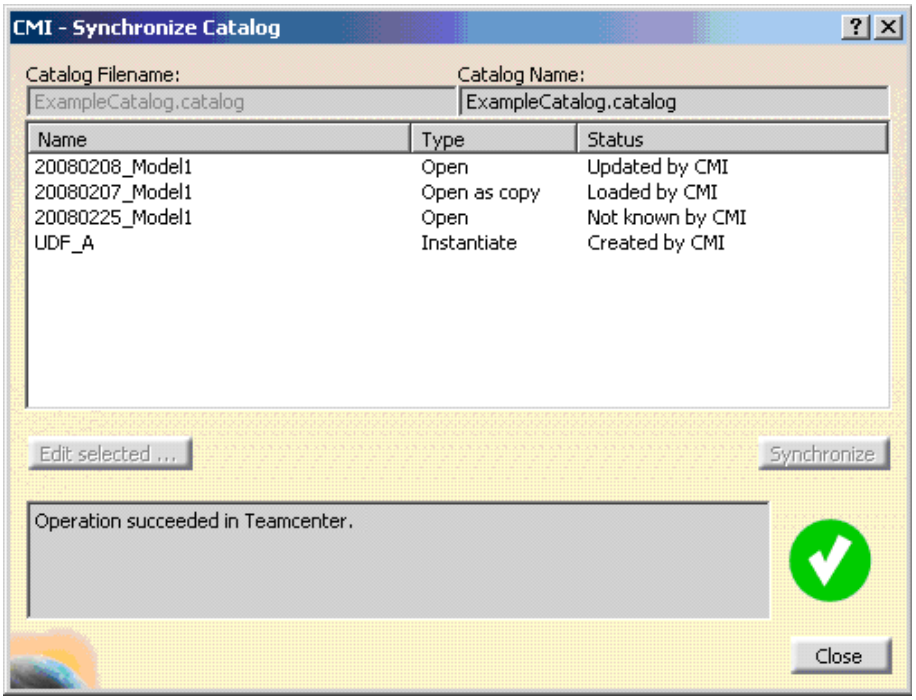

Figure 94: Synchronize Catalog with success

Handling of CMIArchives

CMI supports the use of CMIArchives. A CMIArchive is a dataset in Teamcenter which contains a CATIA V5 structure. The structure has one root item which can be a CATProduct or a CATPart. If the root item is a CATProduct, it can contain more items of type CATIA V5 Component, CATIA V5 CATProduct or CATIA V5 CATPart.

In the following sections the handling of CMIArchives is described in detail.

Creates/Attaches an Archive

First open the CMI RII application in Teamcenter and open an item in the CMI RII application (see Figure 95). After sending the CMI RII application content to CATIA V5 (*Tools→Send To CATIA* in Teamcenter or the *Read Command* in CATIA V5), the product structure is loaded in the CATIA V5 application.

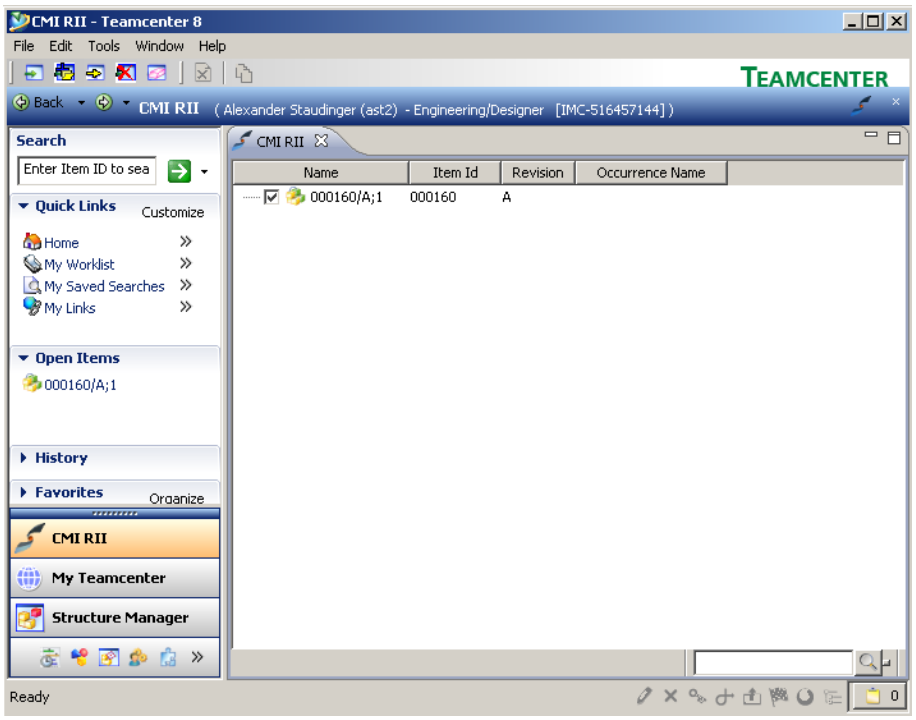

Figure 95: Item 000160 in the CMI RII application window

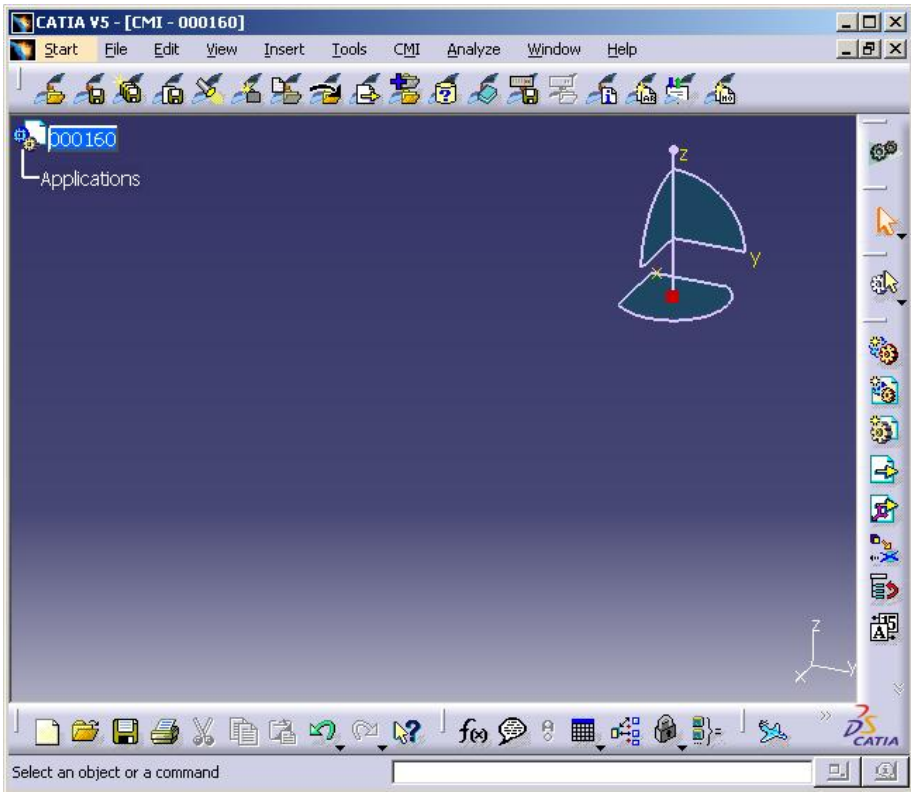
CATIA V5 - [CMI - 000160]
Start File Edit View Insert Tools CMI Analyze Window Help
000160
Applications
Select an object or a command

Figure 96: Loaded item 000160 in CATIA V5

Figure 96 shows the loaded product in CATIA V5. Now we add the structure which should be attached as CMIArchive as child items to the item 000160. In our example the three possible types are added under the root item (see Figure 97).

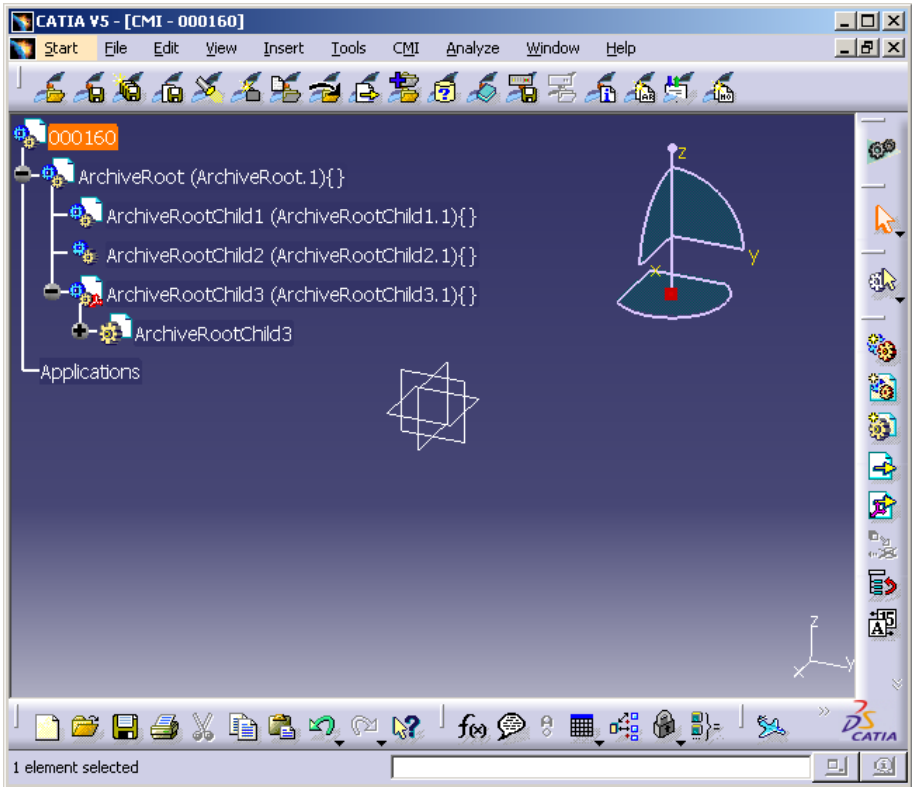

Figure 97: CMIArchive root product with three children

Select the root product which should be attached as CMIArchive (see “ArchiveRoot (ArchiveRoot.1)” in Figure 97). The parent object of the selected item must be loaded from CMI. The CMIArchive will be attached to an existing CMI structure by using the *Attach Archive* CMI toolbar button.

In CATIA V5 select the *Attach Archive* icon .

In the Teamcenter client the create dialog for the new dataset (see Figure 98) will appear.

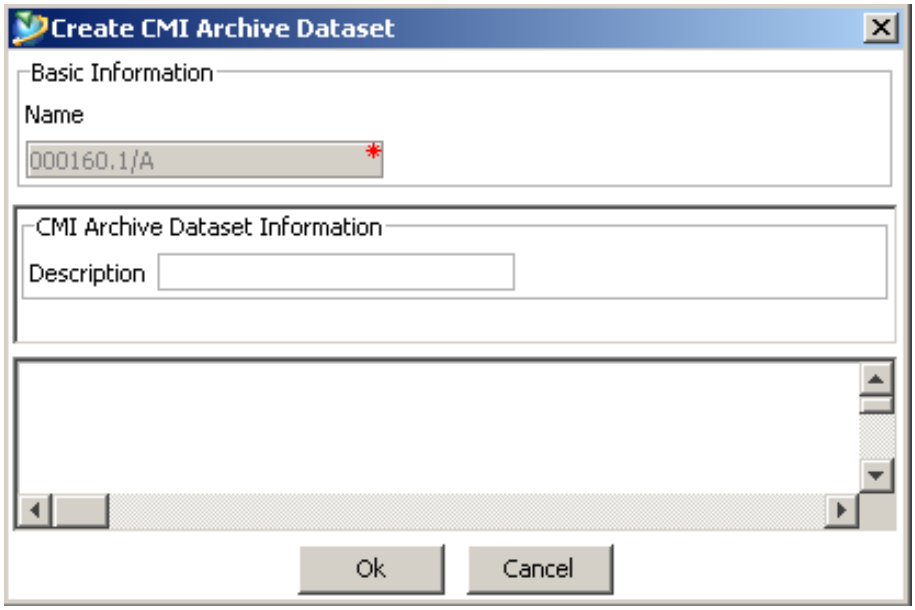

Figure 98: Create CMIArchive Dataset dialog

After creating all objects and relations in Teamcenter the user will be asked to update the parent product in Teamcenter (see Figure 99).

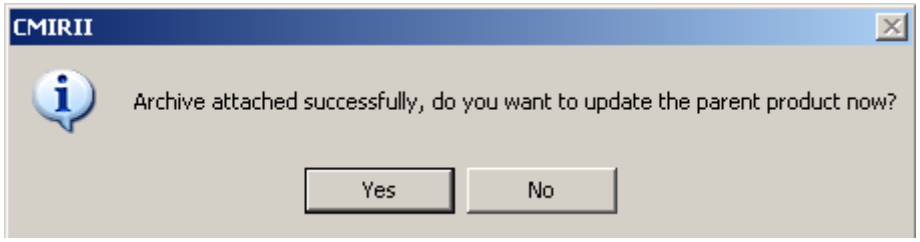

Figure 99: Update parent product message box

After the update the user gets the information from Teamcenter in a message window within CATIA V5 (see Figure 100).

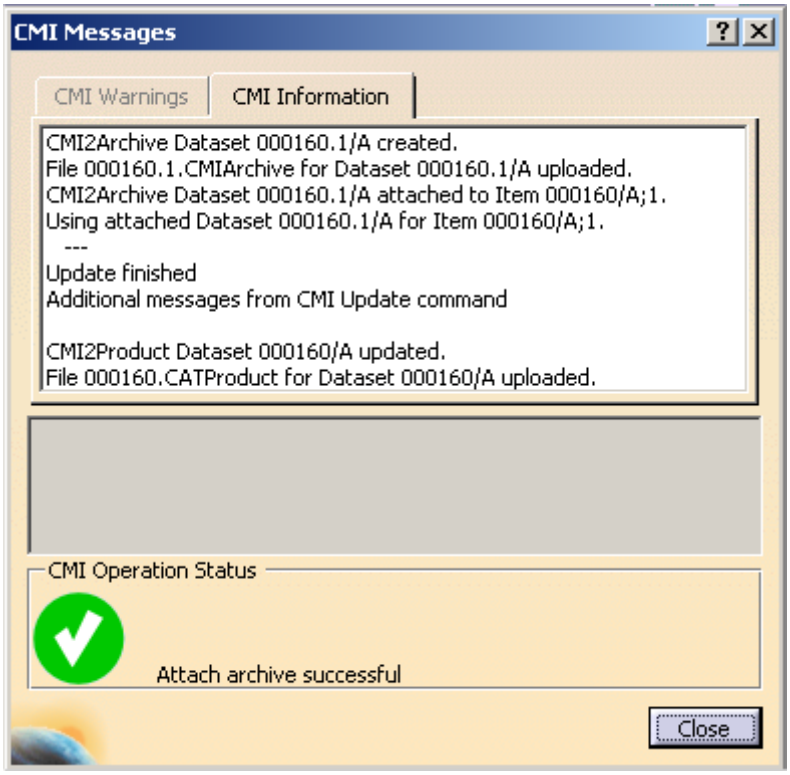

Figure 100: CMI Messages window

CMI RII has created a new CMI2Archive dataset in Teamcenter. The dataset is linked with the item 000160. Figure 101 shows the expanded CMI2Archive dataset in the My Teamcenter application.

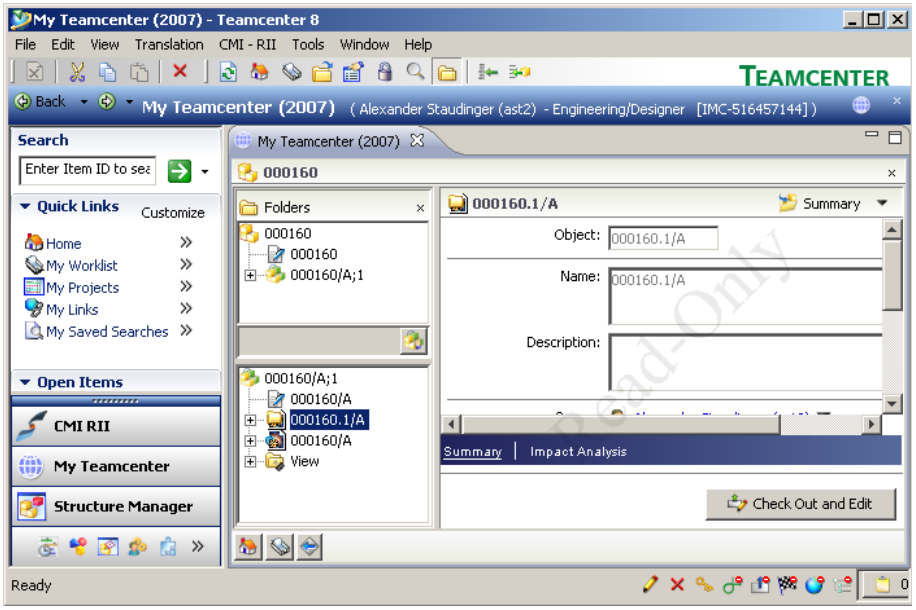

Figure 101: CMIArchive item in Teamcenter

In CATIA V5 the Teamcenter data is attached for the CMIArchive. The CMI info dialog (see Figure 102) shows the information for the CMIArchive object in CATIA V5.

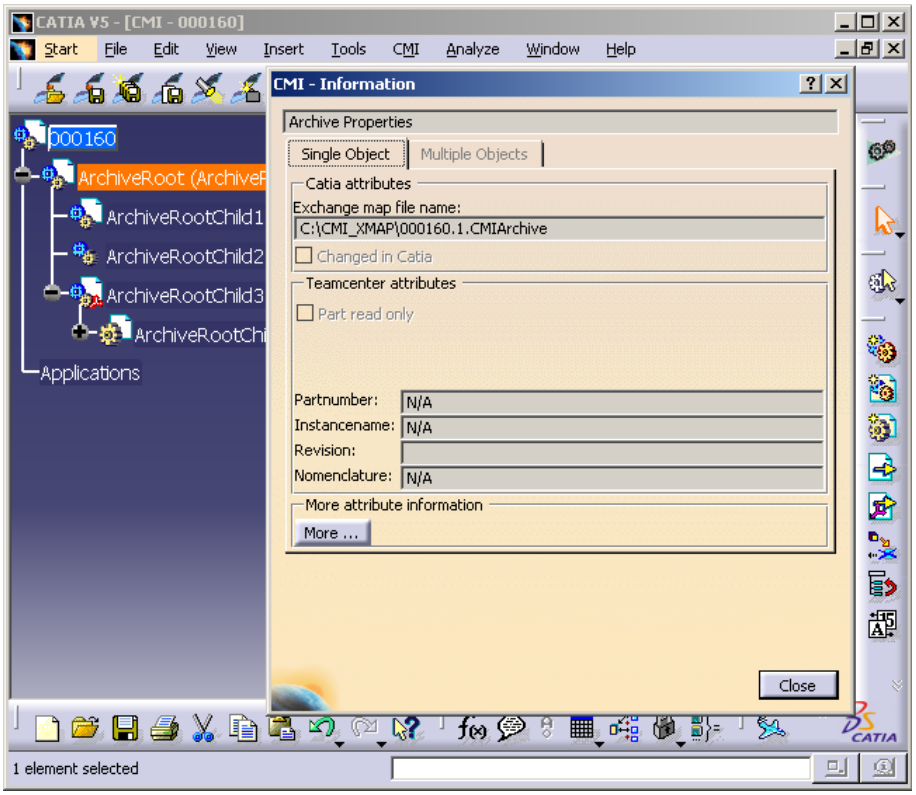

Figure 102: CMIArchive Information

The CMIArchive can be modified or extended, e.g. by adding new CATParts, CATProducts, etc. A changed CMIArchive can be updated in Teamcenter with the standard CMI *Update* commands.

Modify non CATIA archive content

It is possible to add some non CATIA files to the CMIArchive. By default these files have to be located in the CMI exchange directory.

To enable this function the administrator has to set the CATIA V5 environment `CMI_REMOVE_CMIMODNCARCCMD=OFF`.

It is possible to select a special directory from where you can select non CATIA files. Therefore use the *CATIA →Tools →Options* functionality.
In *General →Compatibility →CMI* please select “Use extra directory for non CATIA items in CMI-Archive” and set a directory.
Note: You have to restart CATIA after changing this setting.

To manage a non CATIA file in the archive you have to select any member of the archive and press the *Modify non CATIA archive content* icon . You will get the dialog shown in Figure 103.

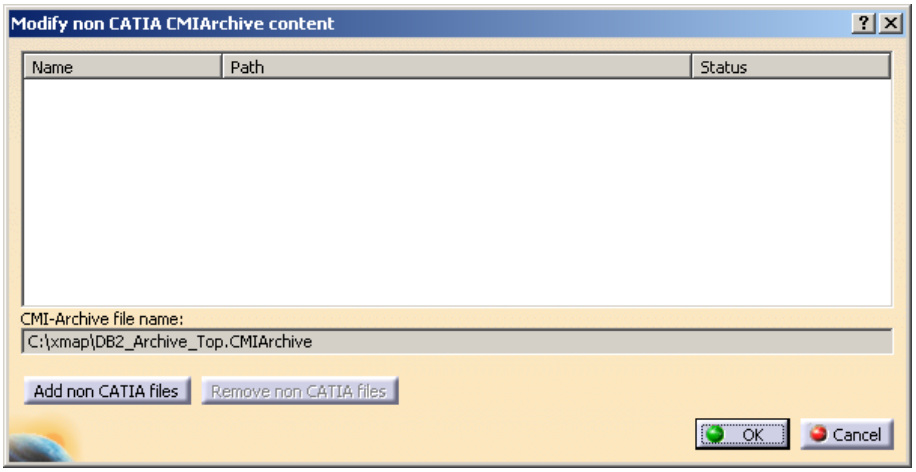

Figure 103: Modify non CATIA CMIArchive content

To add some files press the *Add non CATIA files* button of the dialog. A second dialog appears. This dialog shows all files of the CMI exchange directory except the loaded CMI product structure files and other CATIA files. To show non CMI CATIA files you can deselect the filter checkbox.

Select the files you want to add to the CMIArchive and press OK. The selected files are added to the CMIArchive. During CMI *Update* the files are packed to the CMIArchive file. During read the files are extracted from the CMIArchive.

It is also possible to select a file in the dialog and to remove it from the CMIArchive by pressing *Remove non CATIA files*. During CMI *Update* the files are removed from the CMIArchive file.

Support for BOM Parts under CMIArchive

It is possible to use Items from Teamcenter within an Archive.

To enable this function the administrator has to set the CATIA V5 environment `CMI_ARCHIVE_BOM_CHILDREN=ON`.

BOM Parts (Items loaded from Teamcenter) can only be inserted into already existing Archives.

Load an existing Assembly from Teamcenter.

Insert the Root product of the product structure you want to become a CMIArchive.

Use *Creates/Attaches an Archive* to create the CMIArchive.

Load an Item from Teamcenter and insert it into a product that is part of the CMIArchive (see section Creates/Attaches an Archive); or use the *Insert from Teamcenter* (see section *CMI toolbar: Insert from Teamcenter*) command.

In Figure 104 you can see the inserted Item "000649" in the CMIArchive.

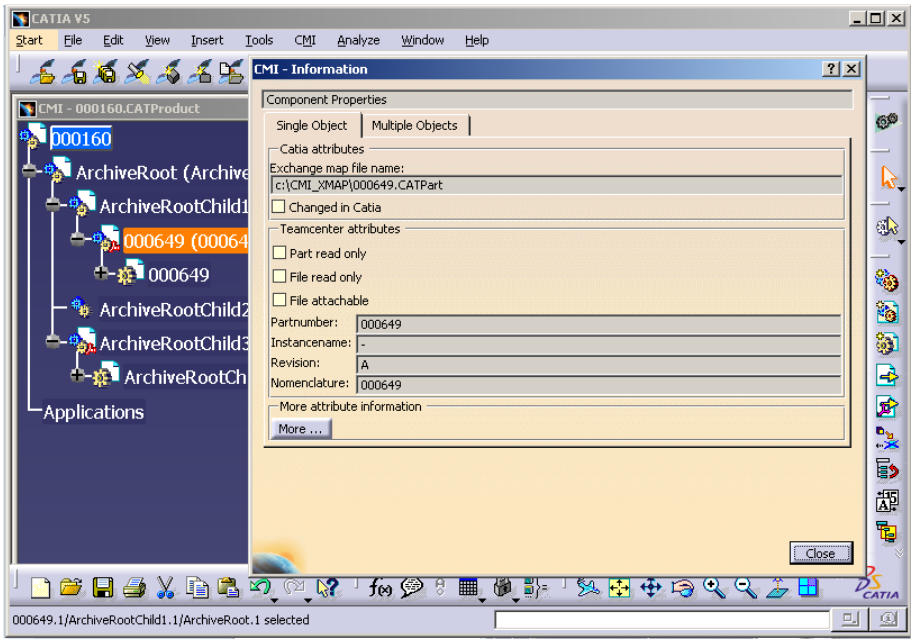

Figure 104: BOM part in CMIArchive

An CMIArchive with BOM Parts can only be updated with the Synchronize Teamcenter command (see Figure 105).

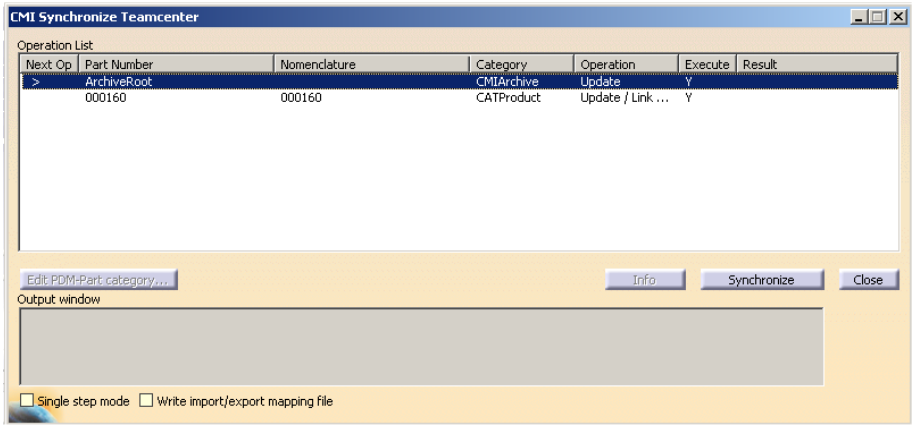

Figure 105: Synchronize Teamcenter of CMIArchive

CMI RII will create a relation between the BOM Part and the Assembly that attaches the CMIArchive (see Figure 106).

For that reason you can only attach BOM Parts if the CMIArchive was loaded together with its Teamcenter Assembly.

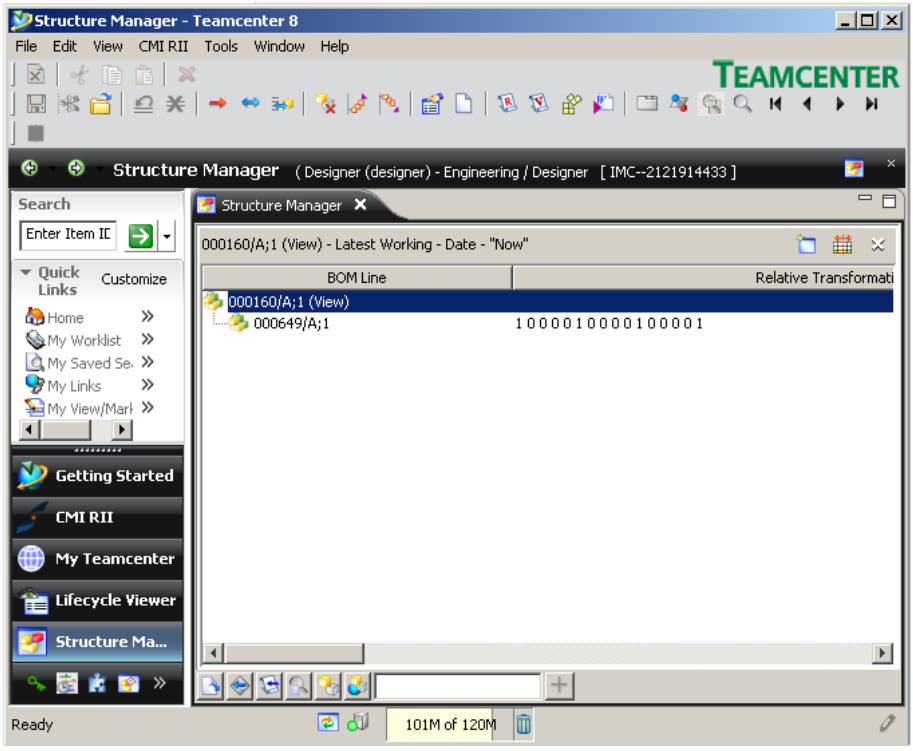

Figure 106: Created relation for the BOM Part

The transformation (positioning information) stored in Teamcenter for this part instance is a summary of the transformations that are hidden in the CMIArchive; so the positioning e.g. in a DMU is correct relative to the assembly.

Since in CATIA it may not be obvious which parts of the product structure are stored in the CMIArchive and which are individual parts in Teamcenter, the ability to use a BOM Part under a CMIArchive should only be used for specific use cases, where this is implicitly clear to the user.

One use, for instance, is to build supplier Parts into an OEM structure, where differentiation may be possible by the different naming conventions.

Handling of CATAnalysis

Analysis stored in a CATAnalysis dataset

CATAnalysis files can be stored in Teamcenter as a dataset. The analysis is attached to the Teamcenter Item Revision of the CATProduct or CATPart that it is referencing. It is handled in a similar way as a CATDrawing - normally the CATAnalysis files are not loaded; it is loaded if it is explicitly expanded in the CMI RII application or switched on in the options (see section Menu item Edit).

Unlike with a CATDrawing, the assemblies referenced by the CATAnalysis are updated if you use the *Synchronize Teamcenter* function in the Analysis Workshop.

To manage CATAnalysis as a native file, your administrator has to set the CATIA V5 environment `CMI_STORE_ANALYSIS=ON`.

Load an Assembly or Part from Teamcenter.

In CATIA, generate the CATAnalysis (see Figure 107).

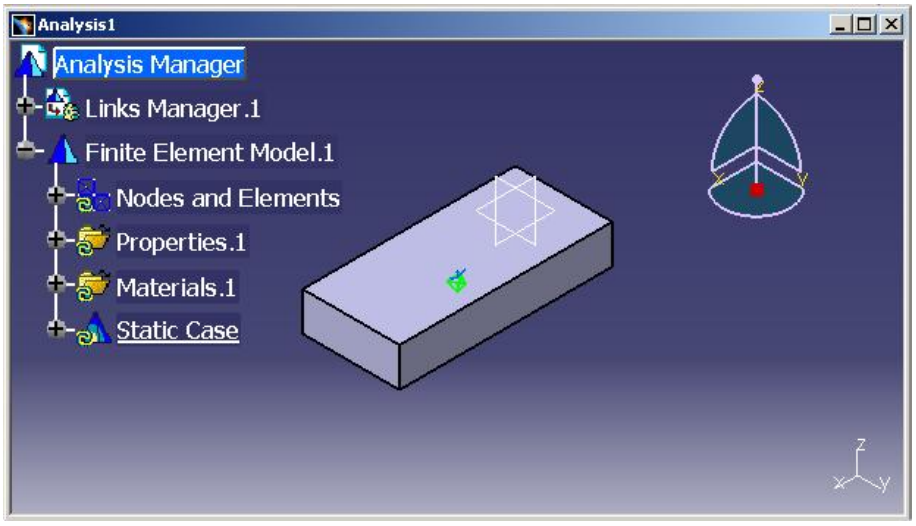

Figure 107: CATAnalysis

Use *Synchronize Teamcenter* to store the CATAnalysis file in Teamcenter. Synchronize will also update the Assembly the CATAnalysis is referencing (see Figure 108).

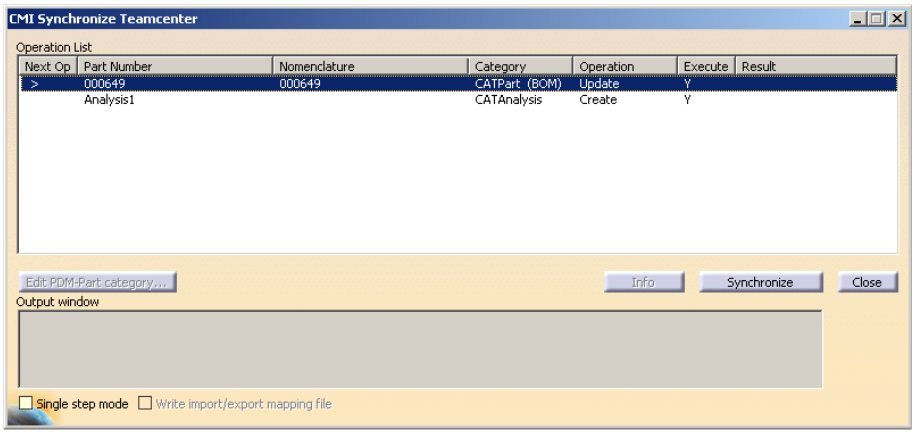

Figure 108: Synchronize Teamcenter of CATAnalysis

In Teamcenter the dataset for the CATAnalysis will be created and attached to the Part or Assembly for which the CATAnalysis was generated (see Figure 109).

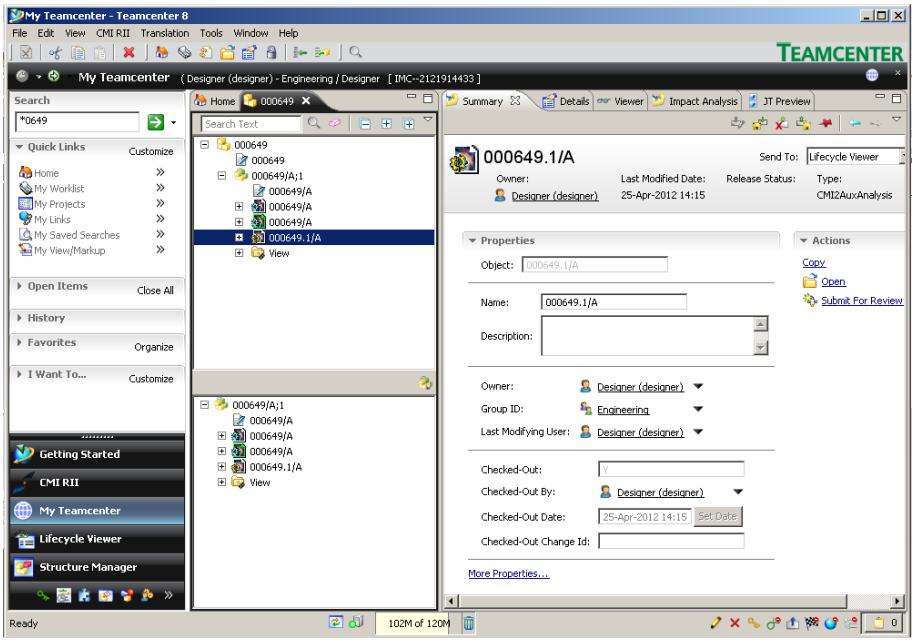

Figure 109: Existing item in Teamcenter

To read the CATAnalysis drop the Item into the CMI RII application.

Set the option *Send analysis files to CATIA?* in the CMI RII preferences or expand the Analysis with the context action *Expand Analysis* and send the Item to CATIA (see Figure 110).

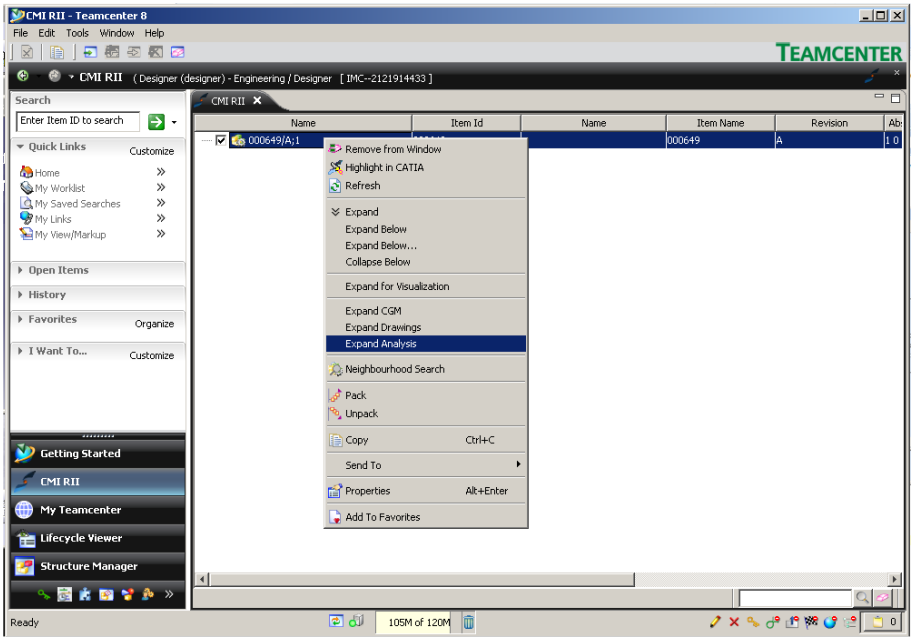

Figure 110: Expand Analysis in CMI RII application

Analysis stored in a CMIArchive dataset

The CATIA V5 data type CATAnalysis can be stored in a CMIArchive (see *Handling of CMIArchives*).

Read an existing product structure document (see Figure 111) to CATIA V5 (see Figure 112).

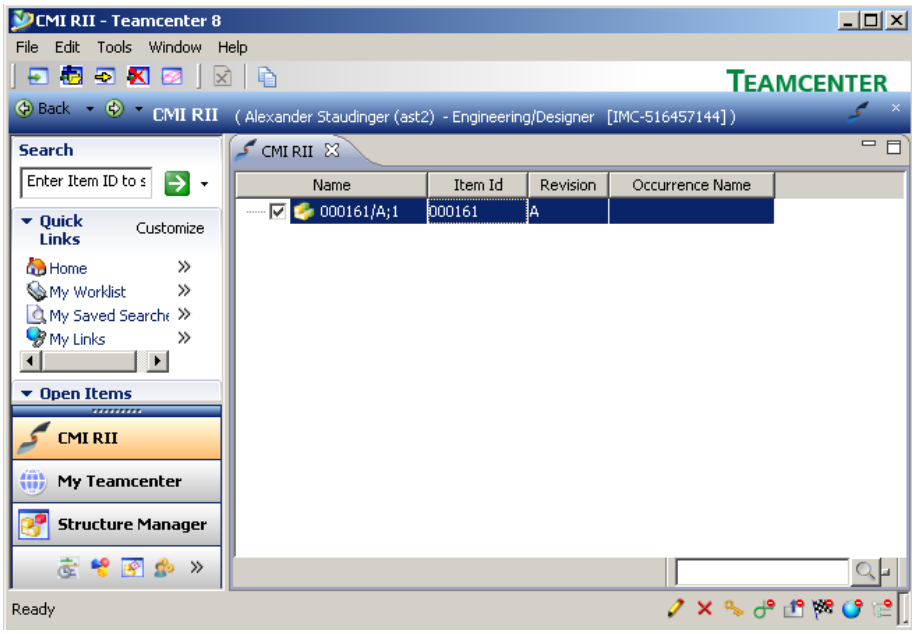

Figure 111: Existing item in Teamcenter

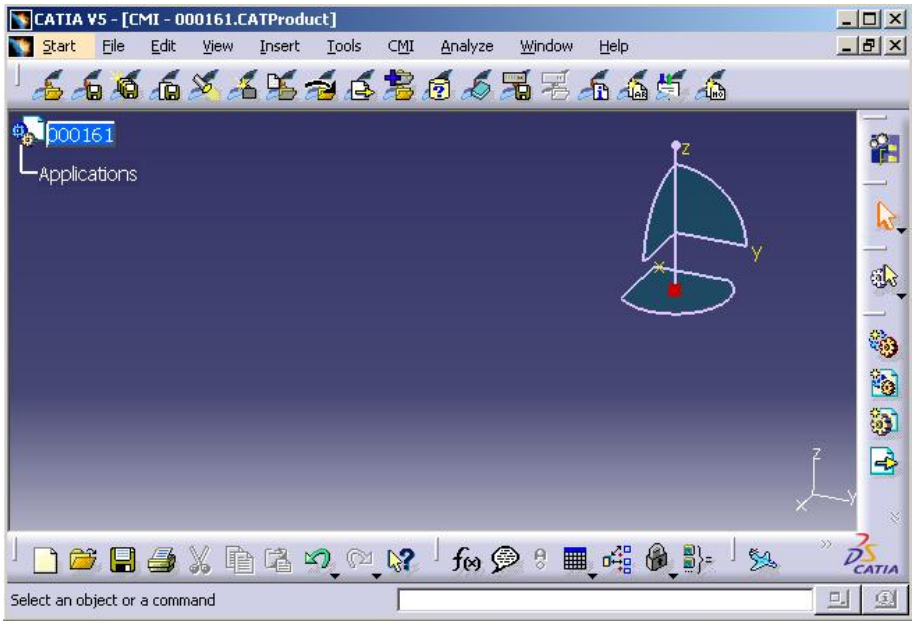
CATIA V5 - [CMI - 000161.CATProduct]
Start File Edit View Insert Tools CMI Analyze Window Help
000161
Applications
Select an object or a command

Figure 112: Item loaded by CMI

Attach an existing CATAnalysis file with the CATIA V5 functionality *Add existing component* (see Figure 113).

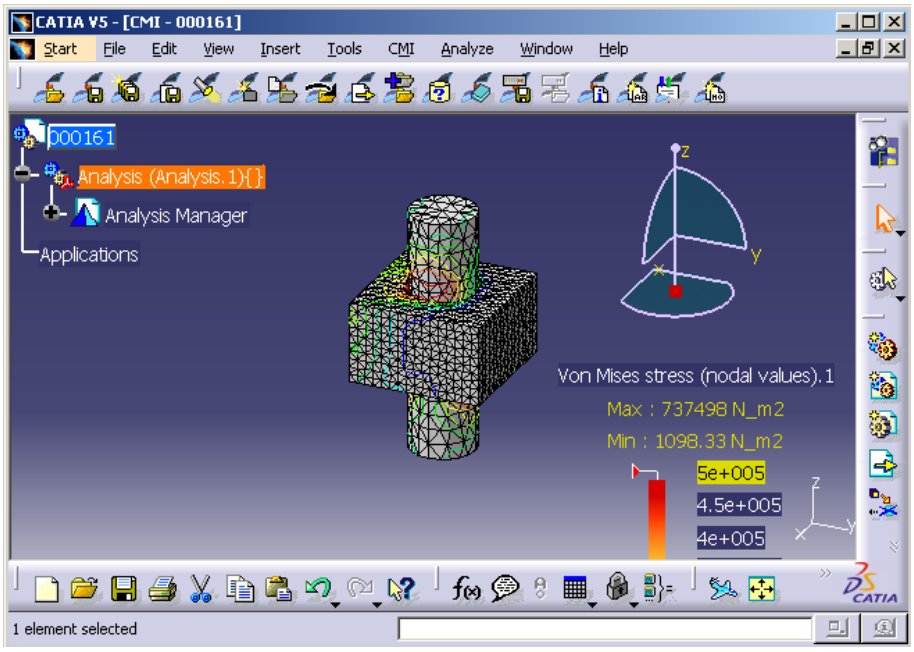

Figure 113: CMI Product with existing CATAnalysis

Select the CATAnalysis in the product structure and use the *Attach Archive* function (see *Handling of CMIArchives*).

The result is a new CMIArchive with the CATAnalysis file, CATProducts, CATParts, and the optional CATAnalysisResults file, which is attached to the existing item. Figure 114 shows the item with the new CMIArchive attached.

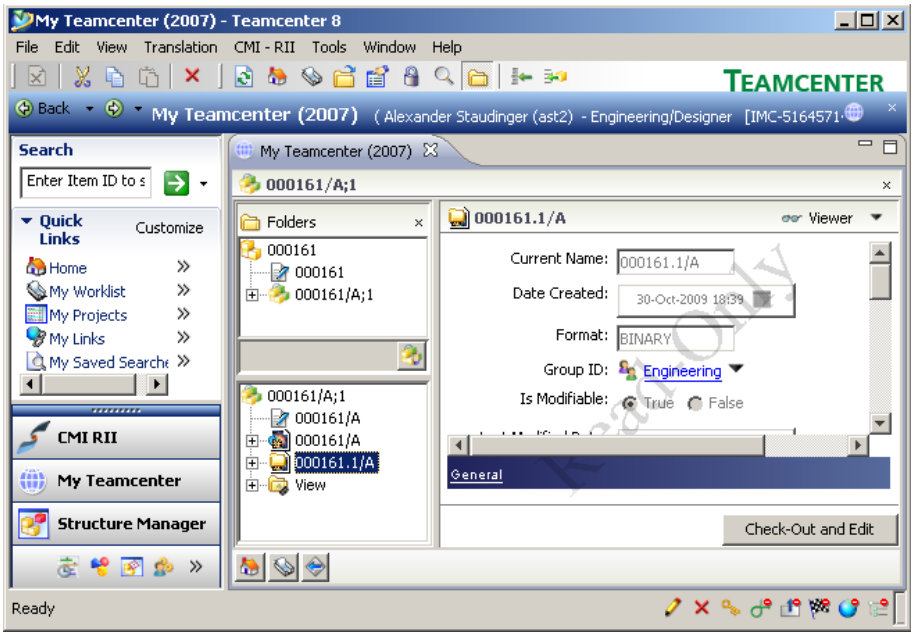

Figure 114: CMIArchive item with CATAnalysis in Teamcenter

The newly created CMIArchive can be opened with the CMI RII application (see Figure 115) and loaded to CATIA with the *Read* command.

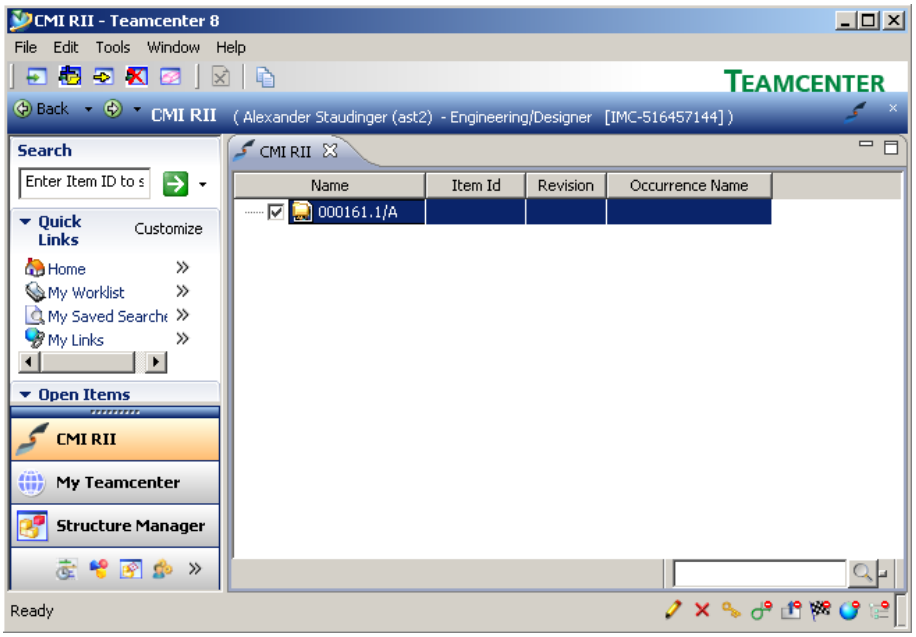

Figure 115: CMI RII application with CMIArchive

The result is the CATAnalysis document in CATIA V5 (see Figure 116).

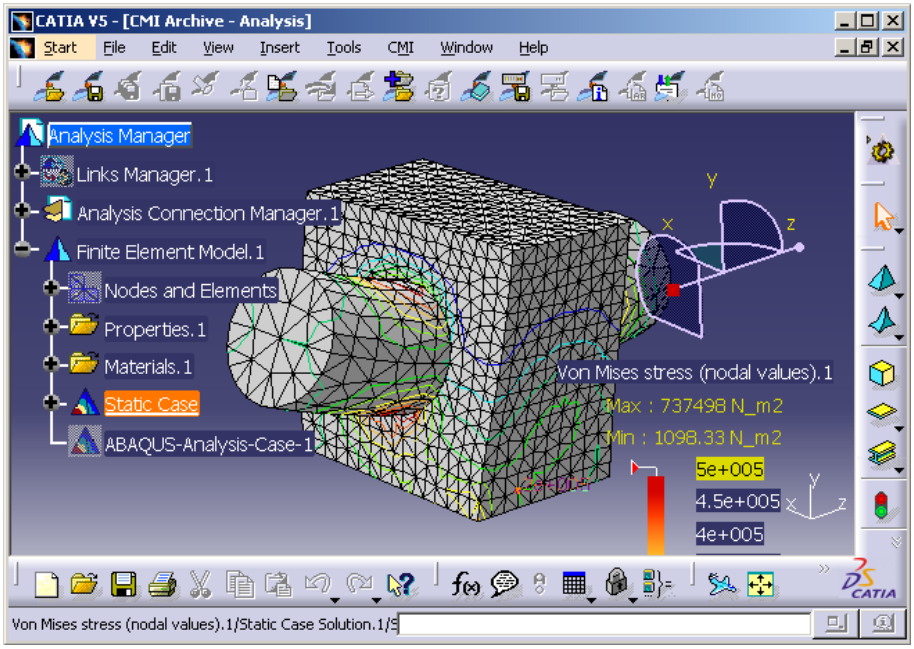

Figure 116: Existing CMIArchive with CATAnalysis loaded by CMI

Changes made by the user can be updated with the standard CMI *Update* commands.

If you only have the V5 GPS product but not a GAS license, you can still store a CATAnalysis in a CMIArchive.

Your administrator should add the following settings to the CATIA environment:

CMI_ENABLE_CRE_ANALYSIS_ARCHIVE=ON

CMI_ANALYSIS_ARCHIVE_OWN_WINDOW=ON

With these settings, you can create a CMIArchive out of the “Analysis Manager”. The second setting ensures that CATAnalysis opens in a separate window, even if the

CMIArchive is attached to an Assembly.

Handling of CATProcess

CATProcess is a CATIA V5 file type. In Teamcenter the CATProcess file can be imported to the CMI2Process dataset with the standard My Teamcenter functionality *New→Dataset…* (see Figure 117).

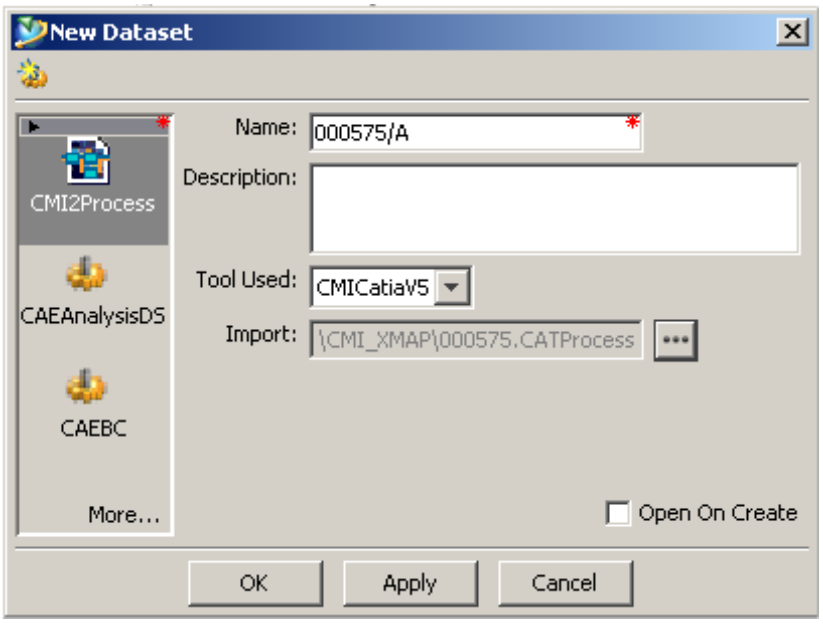

Figure 117: Teamcenter New Dataset dialog

After creating the CMI2Process dataset the dataset can be attached to an Item Revision. Figure 118 shows an example for a Process Element with a CMI2Process dataset.

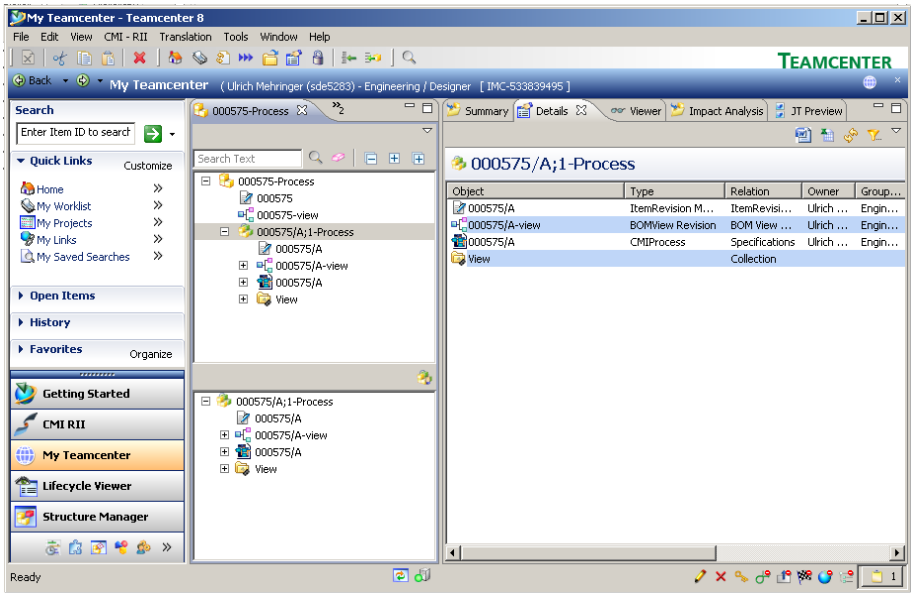

Figure 118: Part with attached CATProcess data item

After sending the Process Element in the CMI RII application CMI will detect the attached CATProcess and changes the icon of the dropped Process Element. Figure 119 shows an example for a Process Element in the CMI RII application window.

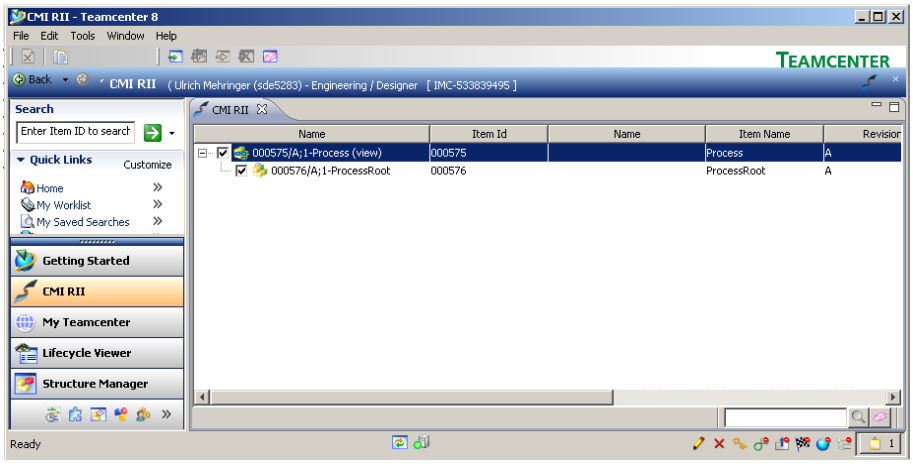

Figure 119: CMI RII application with dropped Process Element

After an expand of the Process Element in the CMI RII application the expanded items are by default marked as Product View Elements. Figure 119 shows an expanded structure. By default all child items of the Process Element are classified as Product View. By customization this can be enhanced to Product View and Resource View. The views are later used in the CATIA V5 module to define the View where the assembly should build in.

After sending the CMI RII application content to CATIA V5 the CATProcess document is loaded in the CATProcess workshop of the CATIA V5 application.

The Product View Assembly is build in the Product List. As described above, the adding of Assemblies to the Resource list can be customized in Teamcenter. Figure 120 shows the opened CATProcess in CATIA V5.

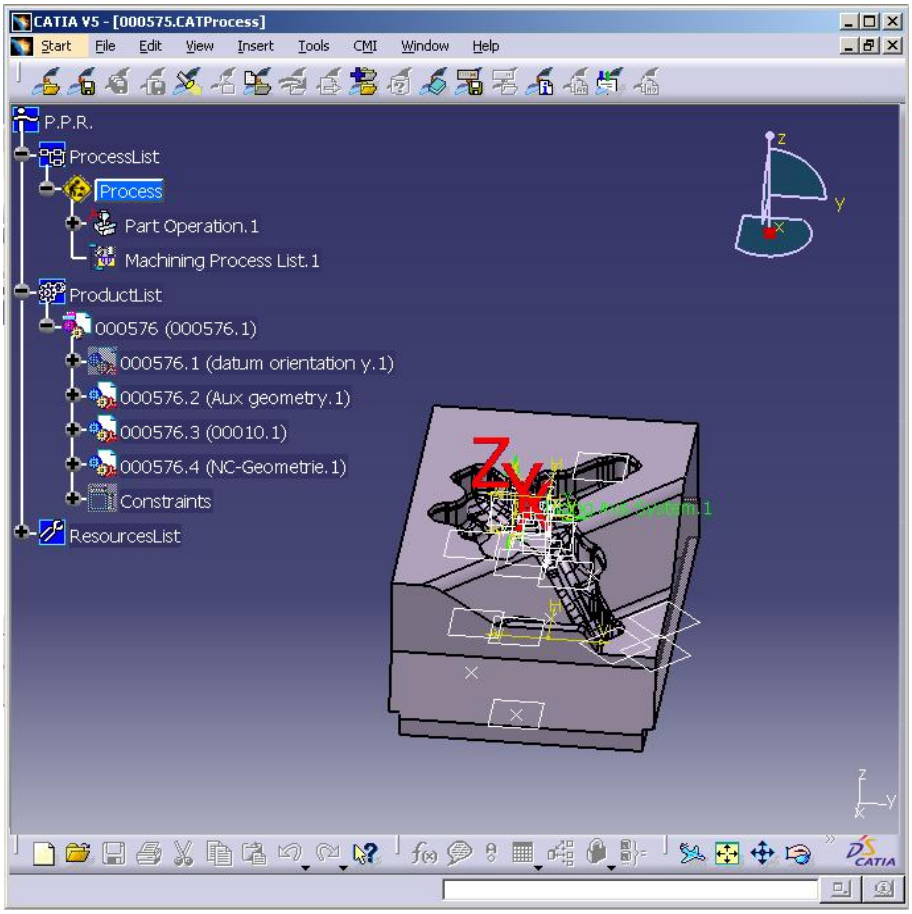

Figure 120: Loaded CATProcess in CATIA V5

Changes in the CATProcess document in CATIA can be updated with the *Update* command of CMI in CATIA V5. All documents in the ProductList and ResourcesList, which are loaded from CMI will also be updated.

The handling of the CATProcess described above, will also work in the Structure Manager (PSE), but the icon for the Process Element will not change.

Handling of Design Tables

CATIA V5 Design Tables can be stored in Teamcenter. Both CSV and Microsoft Excel™ files are supported. The Design Table dataset is linked to the Item Revision and to the CATPart. Design Tables referenced by CATParts and CATProducts are supported.

Design Tables are not stored by default because of performance considerations; also, you need a sound methodology if you allow the use of Design Tables in your methodology, since Design Tables have the power to change your product structures.

The Teamcenter administrator needs to set `CMIWorkWithDesignTables` to `1` in the Teamcenter preferences in order to enable the Design Table support.

The CATIA administrator needs to set `CMI_USE_DTFORPRODUCT=ON` in the CATIA environment in order to enable the support of Design Tables and CATProducts.

Display Design Table

To display the Design Tables in the CATIA structure the relation setting shown in Figure 121 must be set.

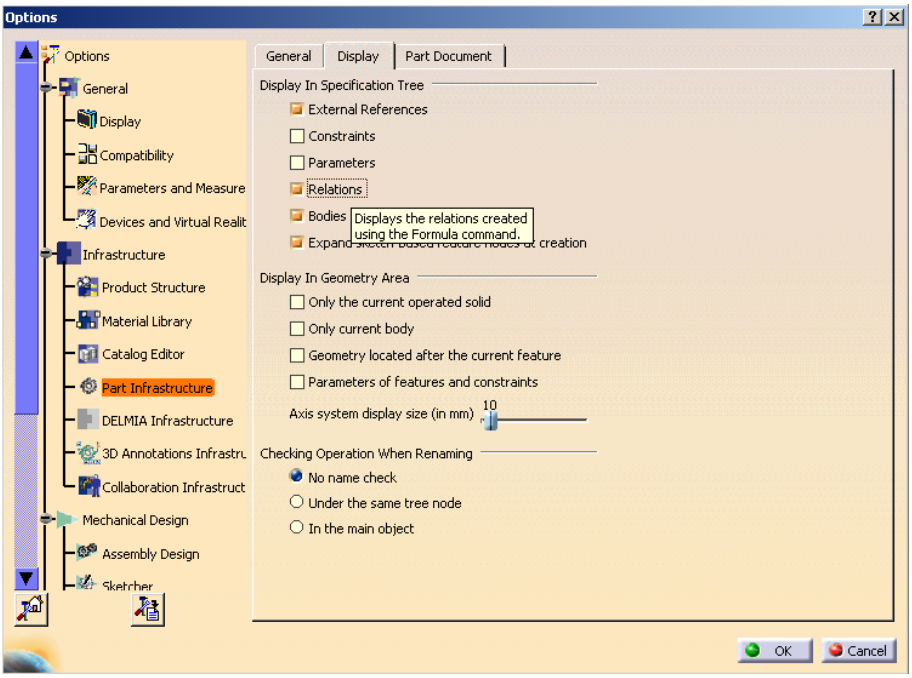

Figure 121: CATIA setting for displaying relations in the structure tree

Create Design Table

For this use case an item was loaded from Teamcenter to CATIA. Then a Design Table was added to the CATPart with the CATIA Design Table command . Figure 122 shows the CATPart with the Design Table.

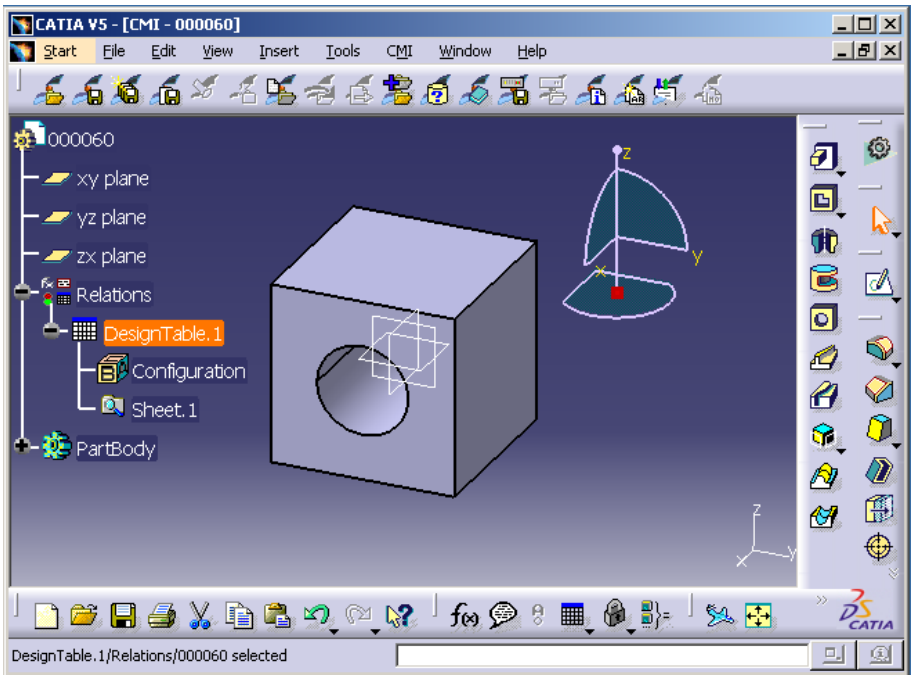

Figure 122: CATPart with Design Table

In CATIA V5 please use the CMI *Synchronize* command. The dialog shown in Figure 123 will show that the newly created Design Table will be created in Teamcenter.

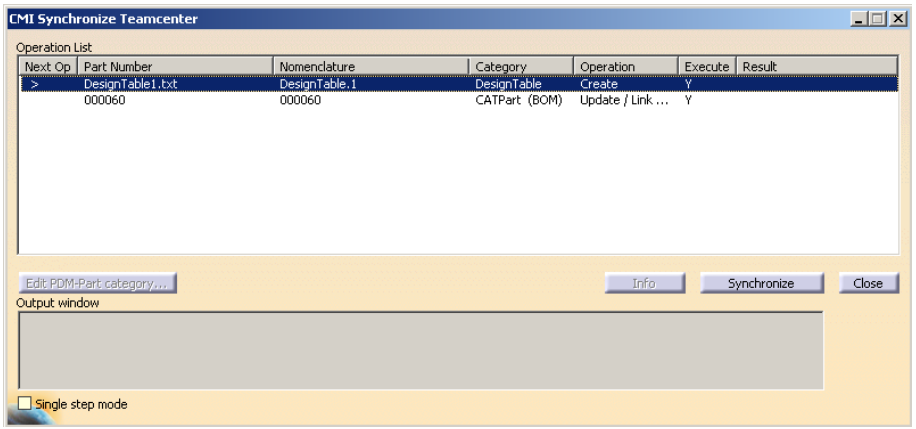

Figure 123: Synchronize dialog with create Design Table operation

The Design Table is created in Teamcenter and linked to the CATPart. Figure 124 shows the result from Teamcenter.

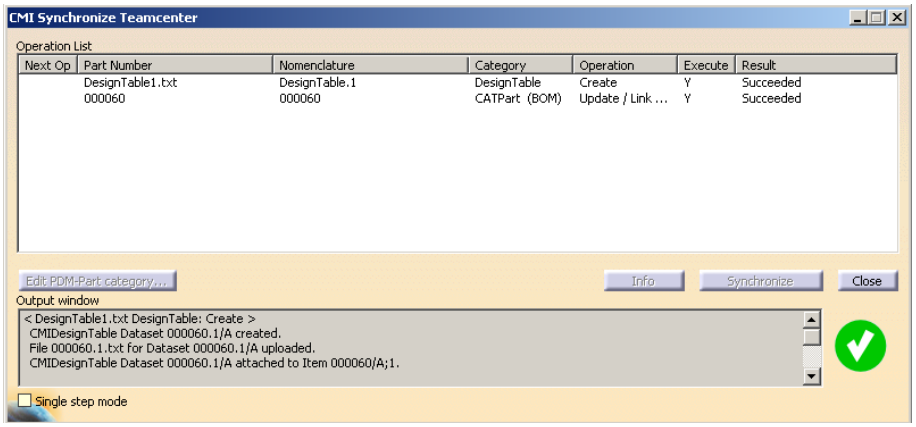

Figure 124: Synchronize dialog with creation result from Teamcenter

Figure 125 shows the result in the My Teamcenter application. The Design Table dataset is created and added to the Item Revision.

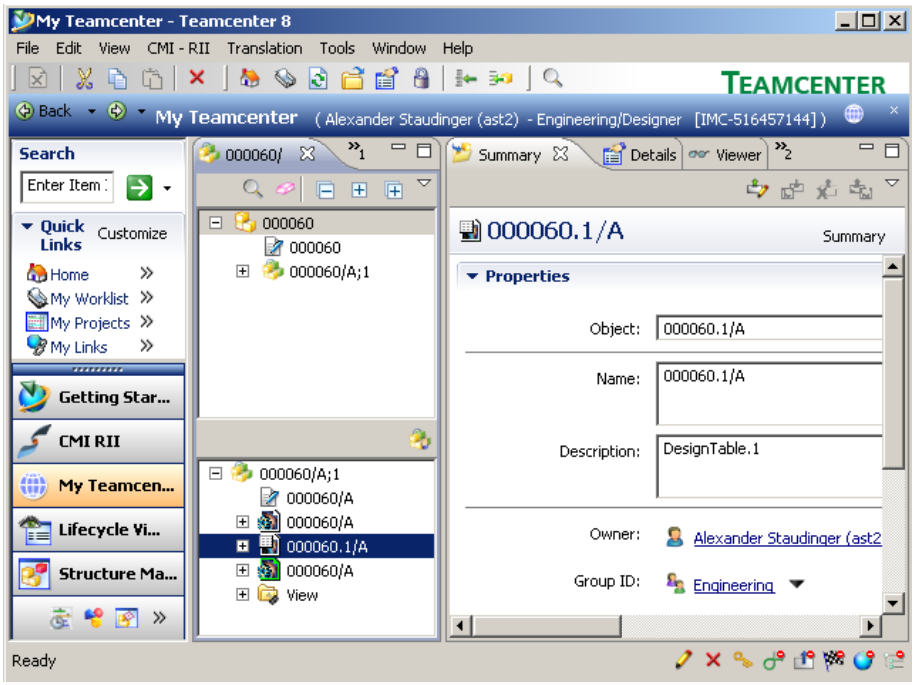

Figure 125: Design Table object in Teamcenter

Update Design Table

The Design Table can be changed in CATIA with a double click on the Design Table object. The dialog shown in Figure 126 will be opened.

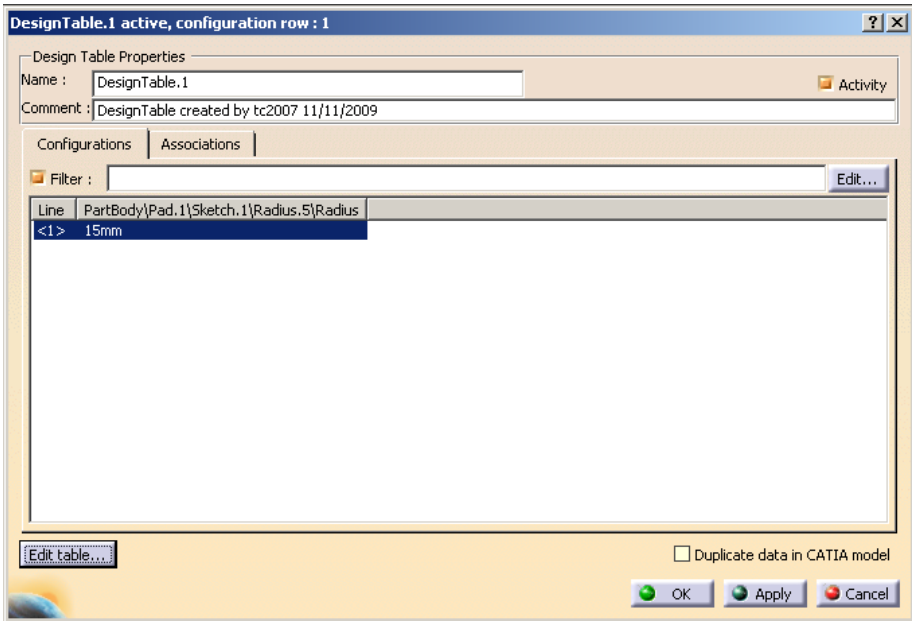

Figure 126: Edit Design Table dialog in CATIA V5

With the *Edit table …* button an editor with the Design Table file is opened (see Figure 127). The radius is changed from 15 to 12.5 mm and the file is saved and the editor is closed.

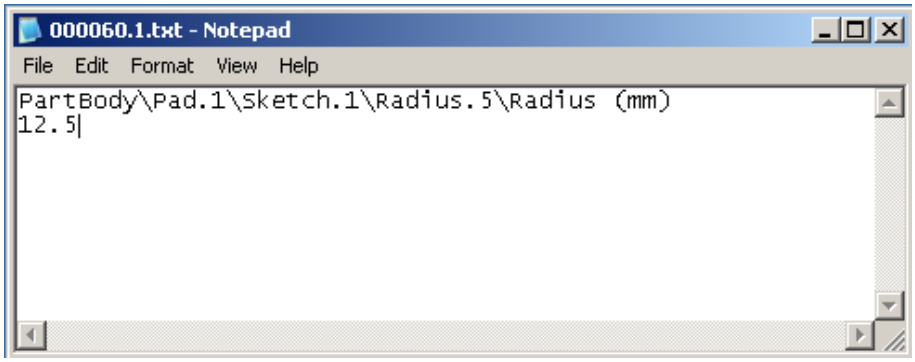

Figure 127: Opened Design Table file

CATIA will present the Knowledge Report (see Figure 128).

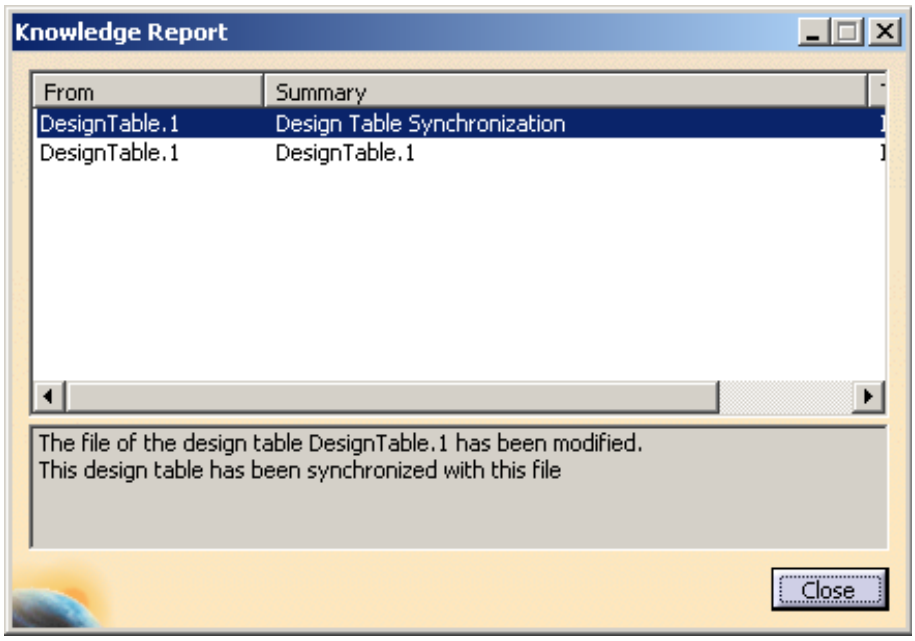

Figure 128: Knowledge Report in CATIA V5

The geometry of the hole is updated. Use the CMI *Update* command in CATIA (see Figure 129) to save the changes in Teamcenter.

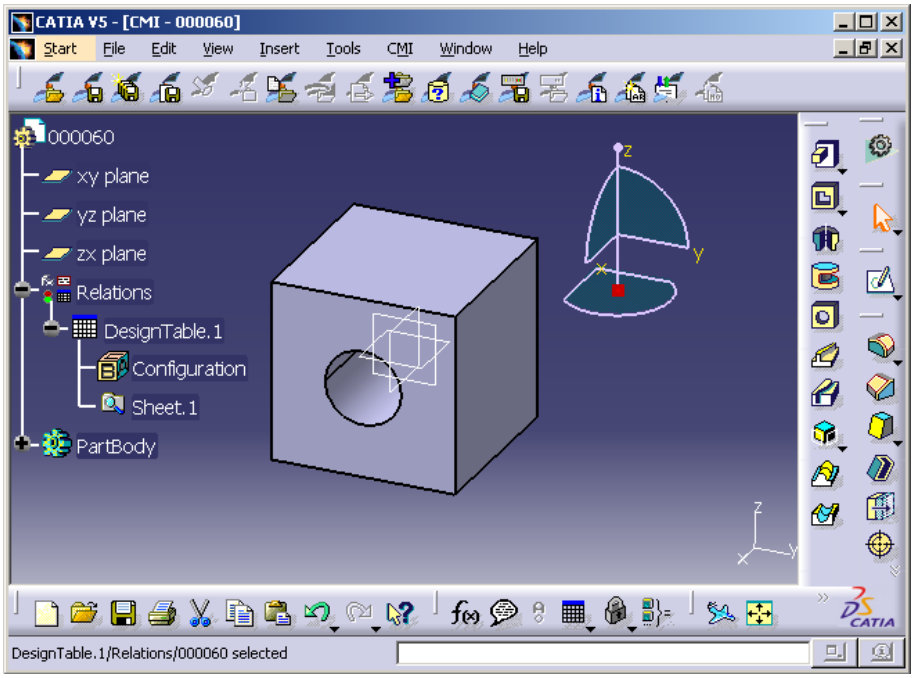

Figure 129: Changed Geometry in CATIA V5

CMI RII will update the changed CATPart and Design Table file to Teamcenter and will show the success dialog (see Figure 130).

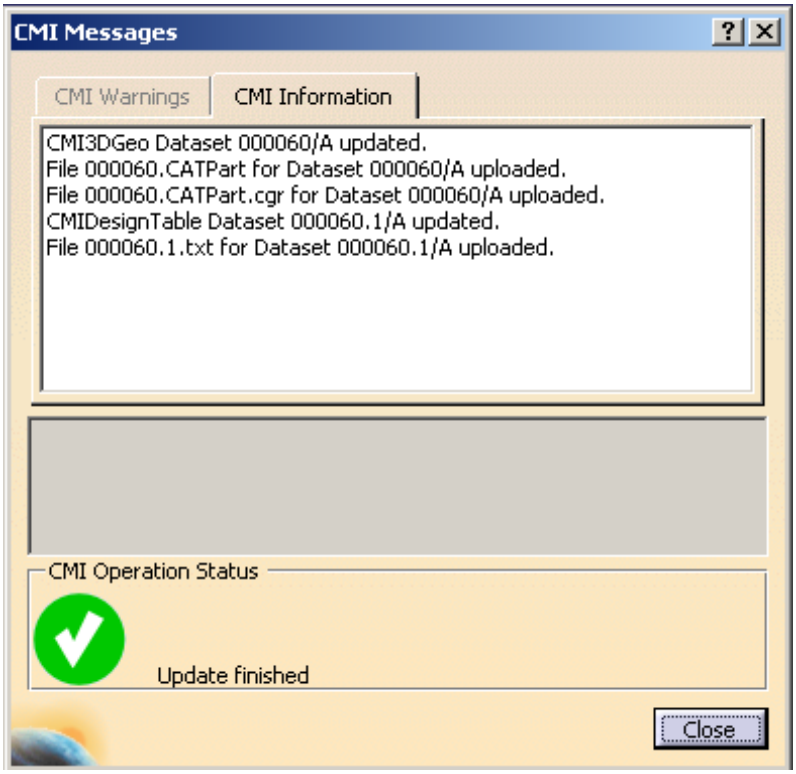

Figure 130: Success message from Teamcenter

Remove Design Table

The Design Table can be removed in CATIA. Figure 131 will show the CATPart without the Design Table.

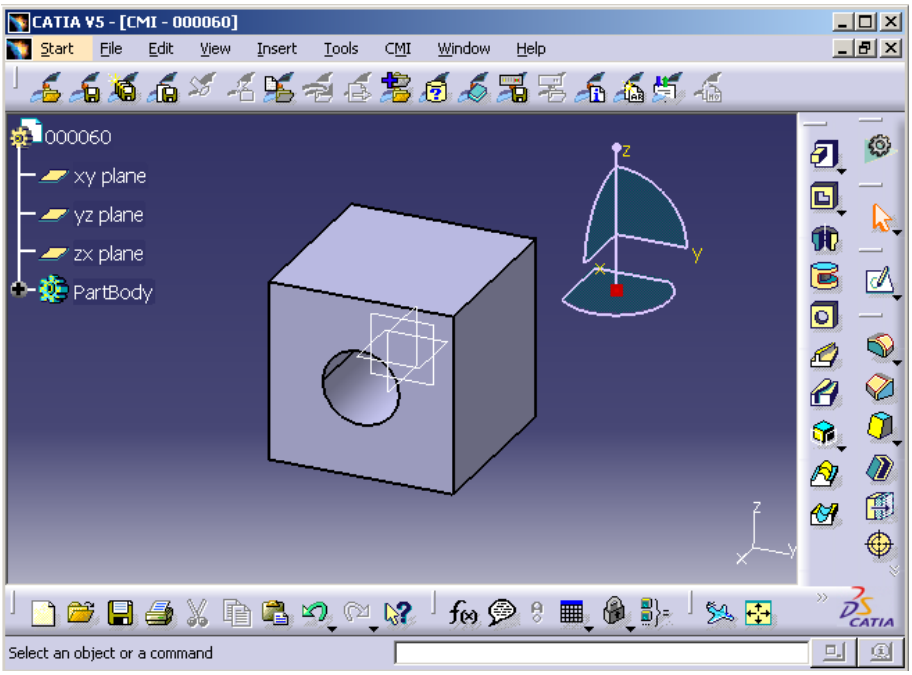

Figure 131: CATPart without Design Table

After pressing the *Synchronize* command the Synchronize dialog is shown. The selected line shows the operation “Update/Drop child”. With the *Info* command the information for the deleted children will be displayed.

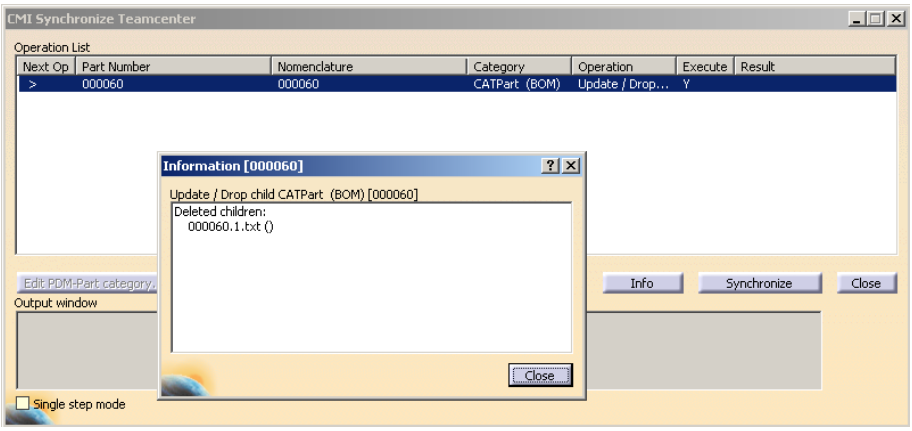

Figure 132: Synchronize dialog before Drop operation

The Synchronize command will remove the link from the CATPart (see Figure 133). The Design Table object is not removed from the item. The user has to check the status and if the Design Table dataset is not longer needed it can be removed in Teamcenter by the user.

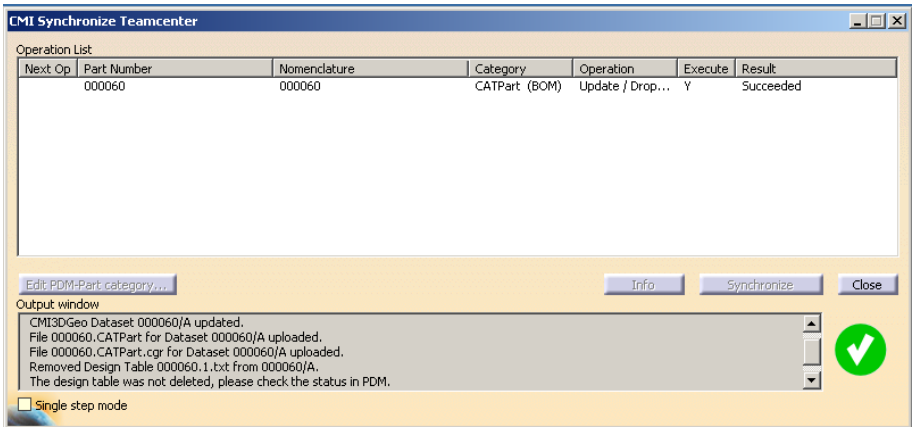

Figure 133: Success dialog from Teamcenter

Support of CATIA V5 Released Cache

CMI supports the use of cgr files in the *released cache* of CATIA V5. For this purpose the cgr files of CATIA models are stored in Teamcenter. During *To CATIA* these cgr files are copied to the released cache instead of the CATIA models to the exchange map. In CATIA V5 the cgr files are loaded in visualization mode.

Use *Edit→Options* to set the CMI RII preferences.

Set “Transfer CGR file To CATIA” to “Only CGR” or “CGR + geometry”

Use *Tools→Options* to set the preferences in CATIA V5.

Set “Work with the Cache System” to “ON” and set the path to the released cache.

“Check timestamps” must be “ON”.

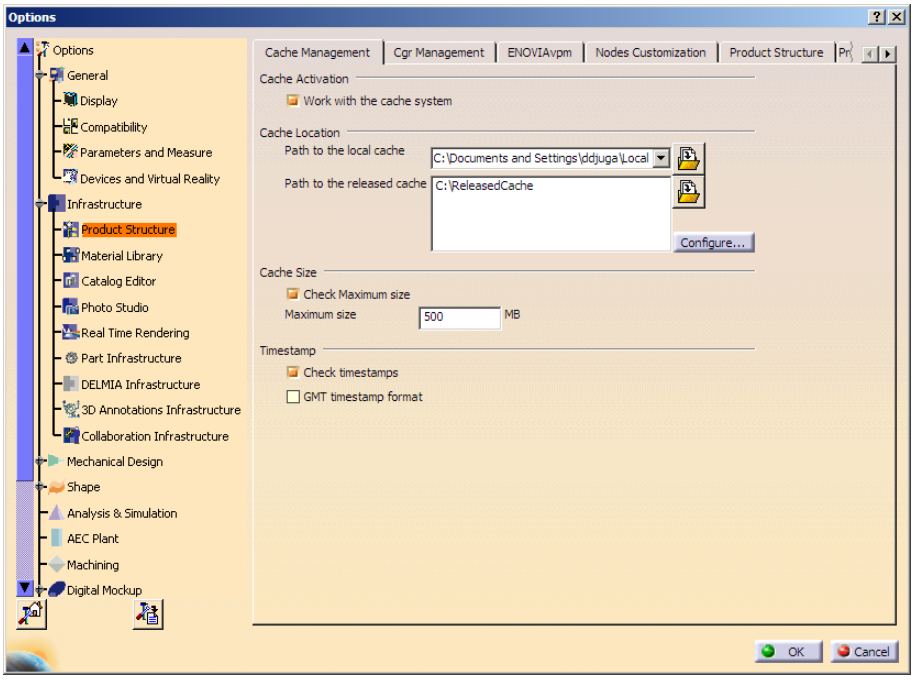

Figure 134: Tools→ Options dialog in CATIA V5

These are the necessary preconditions to copy a cgr file:

- Work with the cache system in CATIA V5 is enabled.
- The released cache is set and exists.
- The CATIA V5 configuration variable `CMI_USERELEASEDCACHE` is set to "`ON`".
- The CMI RII preference "Transfer CGR-File to CATIA V5" is set to "Only CGR" or "CGR + geometry".
- A valid cgr file exists for the CATIA model in Teamcenter.

If the CATIA V5 configuration variable `CMI_SAVEADDITIONALCGR=ON` is set, CMI RII stores a cgr file in Teamcenter whenever a CATPart is created or updated.

Optional commands

In the following section, optional commands are described which must be enabled by the administrator.

SaveAs in Teamcenter

To enable this function the administrator has to set the CATIA V5 environment `CMI_REMOVE_CMISAVEASCMD=OFF`.

With this command a CATPart, CATDrawing or cgm currently set active in CATIA V5 can replace another file in Teamcenter. A CATPart, CATDrawing or cgm selected in Teamcenter and then dropped into CMI RII will be overwritten by the contents of the CATPart, CATDrawing or cgm in CATIA memory.

Design or load your CATPart, CATDrawing or cgm in a separate window in CATIA.

In CATIA V5 select the *Save As in Teamcenter* icon .

Drag and drop or send an item into the CMI RII application in Teamcenter.

In order to *Save As in Teamcenter* with a CATDrawing, drag the 'new' CATDrawing dataset to be overwritten into the CMI RII application in Teamcenter. The CATDrawing active in CATIA V5 will then overwrite its content.

In order to *Save As in Teamcenter* with a cgm, drag the 'new' cgm dataset to be overwritten into the CMI RII application in Teamcenter. The cgm active in CATIA V5 will then overwrite its content.

In order to *Save As in Teamcenter* with a BOM CATPart, drag the 'new' item to be overwritten into the CMI RII application in Teamcenter. The CATPart active in CATIA V5 will then overwrite its content.

In order to *Save As in Teamcenter* with a no BOM CATPart, drag the 'new' auxiliary dataset to be overwritten into the CMI RII application in Teamcenter. The CATPart active in CATIA V5 will then overwrite its content.

Please take care when you *Save As* a CATPart which is used in a CATProduct a reference to the CATPart is stored within the parent CATProduct. Make sure that the

new CATPart is compatible.

Update Position

To enable this function the administrator has to set the CATIA V5 environment `CMI_ENABLE_CMIUPDATEPOSITIONCMD=ON`. This function updates only the transformation matrices in Teamcenter. The CATProduct and CATPart files are not updated.

Update Part

To enable this function the administrator has to set the CATIA V5 environment `CMI_ENABLE_CMIUPDATEPARTCMD=ON`. This function updates all modified CATPart files in Teamcenter. Transformations and CATProduct files are not updated.

Restore Positions

To enable this function the administrator has to set the CATIA V5 environment `CMI_RESTORE_POSITION=ON`. This function restores the positions to their original state loaded from Teamcenter.

Choose Update Position

To enable this function the administrator has to set the CATIA V5 environment `CMI_ENABLE_UPDATEPOSITIONDIALOG=ON`. This function is available for normal *Update* and the *Update Position* command.

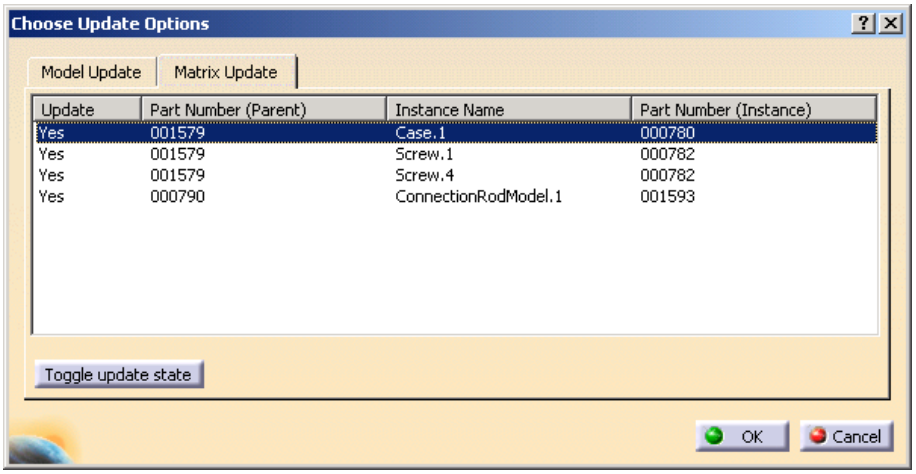

Figure 135: Choose Matrix To Update dialog

If you have changed some positions in the CATIA session this function allows you to select the matrices to be updated. If you select a line in the dialog the

corresponding instance will be highlighted in the CATIA structure tree.

- Yes → Matrix will be updated in Teamcenter
- No → Matrix will stay unchanged in Teamcenter

To change the state you can double click a line or select the line and press the *Toggle update state* button.

Choose Update Geometry

To enable this function the administrator has to set the CATIA V5 environment `CMI_ENABLE_UPD_MODELSELECT_DIALOG=ON`. This function is available for normal *Update* and the *Update Parts* command.

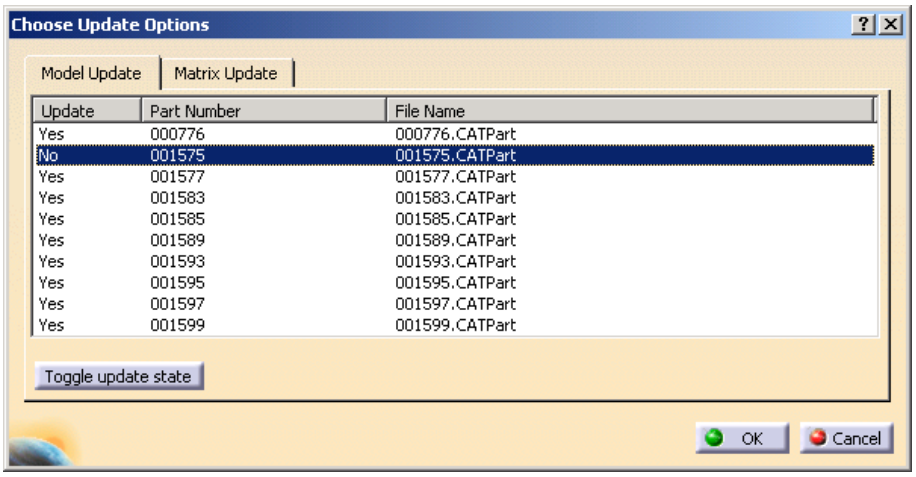

Figure 136: Choose Model To Update dialog

If you have changed some geometries in the CATIA session this function allows you to select the models to be updated.

- Yes → Model will be updated in Teamcenter
- No → Model will stay unchanged in Teamcenter

To change the state you can double click a line or select the line and press the *Toggle update state* button.

Revise

To enable this function the administrator has to set the CATIA V5 environment `CMI_ENABLE_CMIREVISECMD=ON`.

Select a CATPart or CATProduct item in CATIA you want to revise in Teamcenter.

In CATIA V5 select the *Revise in Teamcenter* icon .

The corresponding Item Revision is revised in Teamcenter and the Item Revision itself and the Item Revision children are updated in CATIA in the way a CMIRead of the same data would do it. That is, the metadata (ID, attributes etc.) is updated and structural changes are applied, but no modifications (geometry, position) are lost, and modified flags are preserved.

A subsequent update will update the revised (reread) PDM objects and not the objects initially loaded.

Dataset pseudo Revise

To enable this function the administrator has to set the CATIA V5 environment `CMI_ENABLE_CHECKINOUTDLG_REVISEDATASET=ON`. This function is available in the Check In/Out dialog.

CMI RII supports the standard Teamcenter behavior for the revise process. That means when an Item Revision is going to be revised the CAD Datasets belonging to can be referenced by the new revision of the Item Revision ('Copy As Reference') or copied ('Copy As Object'). With "Copy As Reference" the Dataset is write protected.

In order to be able to modify the CAD Datasets in CATIA the CAD Dataset must be "pseudo Revised". Though, a revise is only possible under certain conditions:

- The CAD Dataset is referenced by a predecessor of the current Item Revision.
- The Item Revision B has "working" state and the user has write access to the Item Revision.
- If the CAD Dataset has "working" state a revise of the dataset is not required and will not be offered therefore.
- Only primary CAD Datasets can be revised: CMI2Part, CMI2AuxPart, CMI2Product or CMI2Drawing.
- Only CAD Datasets that are attached to an Item/Part can be revised.

If these conditions are true then:

- Creation of a new CAD Dataset /B.
- Copy of the named Reference (the CATPart) from the CAD Dataset /A.
- Copy of attributes from CAD Dataset /A.
- Removal of Relationship between Item Revision /B and CAD Dataset /A.
- The CAD Dataset /B will be attached to Item Revision /B.
- Optionally (with CMI preference setting): Automatic Check Out of the new Dataset revision.

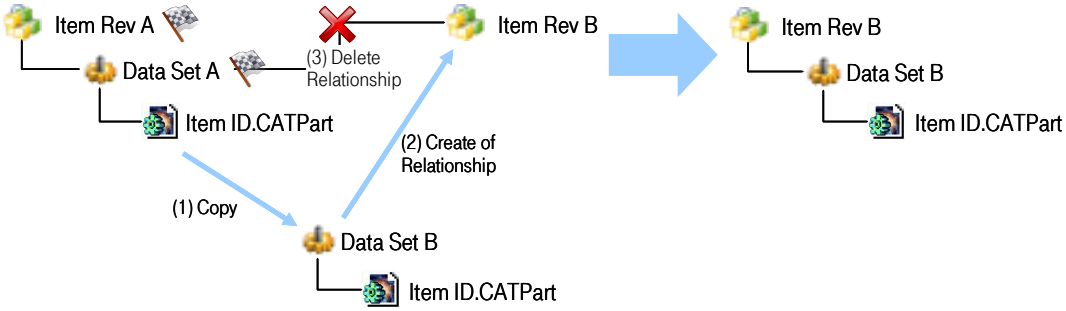

Figure 137: General Process of "Pseudo Revise" for CAD Datasets

Automatic CATDUA

To enable this function the administrator has to set the CATIA V5 environment `CMI_ENABLE_CMICATDUAREAD=ON`.

To clean CATIA files that are stored in Teamcenter with the file based CATDUA utility you can use the *Read with CATDUA* command.

The CMI CATDUAV5 integration needs a template configuration file to run CATDUAV5. The configuration file can be generated like described in the CATIA documentation: “Using CATDUA V5 outside an interactive Session”.

Use the procedure described in “Method 2: Accessing the Batch Interface from the CATUTIL / CATDUA V5 Batch Tool” to define the batch parameters (see Figure 138). Make sure the “Document Selection” is empty. Save the configuration file to CMI_CATDUAV5.xml.

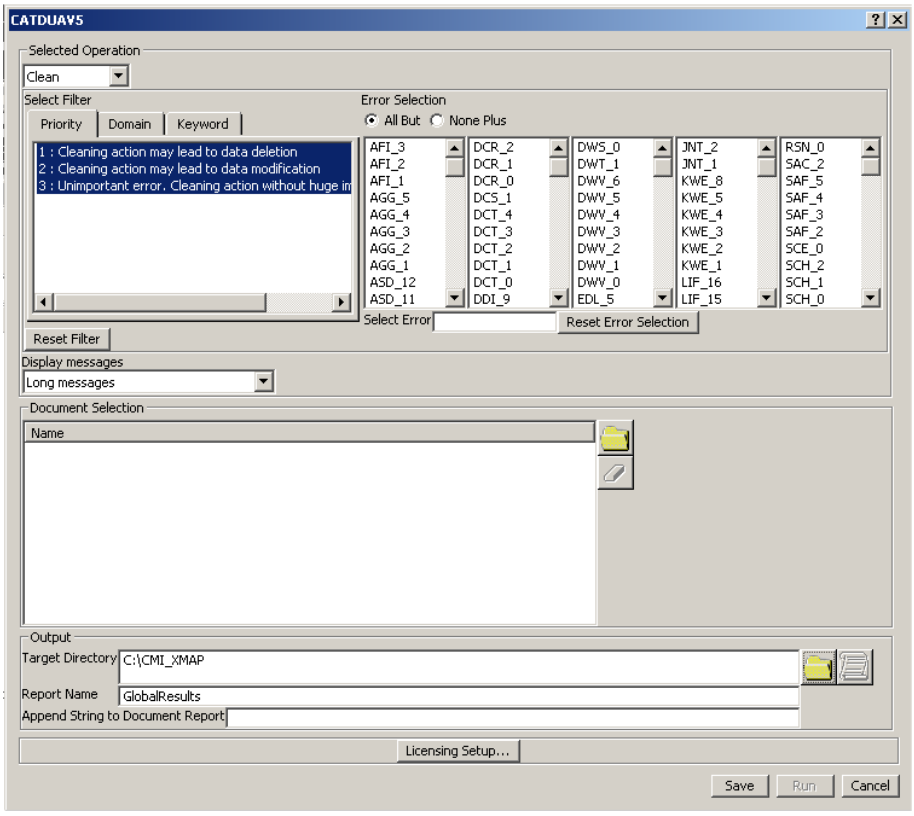

Figure 138: CATDUAV5 parameter dialog

The configuration file CMI_CATDUAV5.xml must be available on every client.

The following variable must be set to point to the CATDUAV5 configuration file:

CMI_CATDUAV5_CONFIG=<path>\CMI_CATDUAV5.xml

Use the icon from the CMI toolbar to read the data that you want to clean.

Select the cleaning method you want to use (see Figure 139):

- “Clean Geometry Files” uses CATDUAV5 for all CATParts and CATDrawings to be loaded from Teamcenter.
- “Clean Structure” uses CATDUAV5 for all CATProducts to be loaded from Teamcenter.

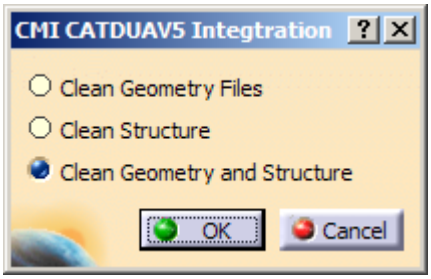

Figure 139: Cleaning Method selection dialog

"OK" starts the *Read from Workbench* and launches the CATDUAV5 utility before loading the files. "Cancel" aborts the Command.

After cleaning the files the result is shown in the web browser (see Figure 140), it can be found in the file %CMIXMAP%\CMI_CATDUA_Result_<YYYY><MM><dd><hh><mm><ss>.htm

C:\CMIXMAP\CMI_CATDUA_Result_20100520153639.htm - Microsoft Internet Explorer
File Edit View Favorites Tools Help
Back Search Favorites
Address C:\CMIXMAP\CMI_CATDUA_Result_20100520153639.htm
Go Links
Global Results
Report Generated on Donnerstag, 20 Mai 2010 at 15:37:09.
Document Location : File
c:\CMIXMAP\PistonAssm.CATProduct OK
c:\CMIXMAP\Piston.CATPart OK
c:\CMIXMAP\PistonBoltAssm.CATProduct OK
c:\CMIXMAP\RetainingRing.CATPart OK
c:\CMIXMAP\PistonBolt.CATPart OK
Checker Global Results
Report for Checked Documents
Reports | Return Codes Detected Prio. 1 Prio. 2 Prio. 3
Report for Cleaned Documents
Reports | Return Codes Detected Fixed Prio. 1 Prio. 2 Prio. 3
Piston.CATPart 0 0 0 0 0
PistonAssm.CATProduct 0 0 0 0 0
PistonBolt.CATPart 0 0 0 0 0
PistonBoltAssm.CATProduct 0 0 0 0 0
RetainingRing.CATPart 0 0 0 0 0
Batch successfully processed - ReturnCode= 0
Done
My Computer

Figure 140: Global Results dialog

After inspection, you can update the cleaned files in Teamcenter. If you do not update, the changes made by CATDUAV5 are not stored.

Note: Cleaning files may take a long time.

Attention: For files that are already open, CMI RII cannot load the version that was cleaned by CATDUA. Make sure that you close the files that you want to clean.

Verification of CATIA Release

CMI can check the CATIA version of files against the current CATIA session during Read. This can be used to avoid loading a document from a newer CATIA release to an older CATIA version. The CATIA Release/SP/HF that was used to save a file in Teamcenter is stored in Teamcenter.

To enable the check, the Teamcenter preference “CMIValidateCatiaVersion” has to be set to “1”. To store the Release Information in Teamcenter the Teamcenter preference “CMIStoreCatiaInfos” has to be set to 1.

Representation Formats in CATIA V5

The CATIA V5 module can be configured to support CATIA V5 shape representation files in a generic way. CATIA V5 Representation files can be used in a product structure and are handled in a similar fashion to V4 Models.

With the following example settings the `3dmap, CATShape, and wrl` Representation formats will be handled by the CMI RII CATIA Module.

To enable support for specific Shape Representations, an administrator can set the following variable in the CATIA V5 environment:

```
CMI_REP_FORMATS={3dmap}{CATShape}{wrl}
```

The same formats must be enabled in the Teamcenter Options.

Use *Edit→Options* to open the Teamcenter preferences dialog.

Switch to the index tab and set the Preference **`CMIRepresentationTypeList`** to a String list with the supported formats like:

- `3dmap`
- `CATShape`, and
- `wrl`

Figure 141 shows a wrl representation in the My Teamcenter application.

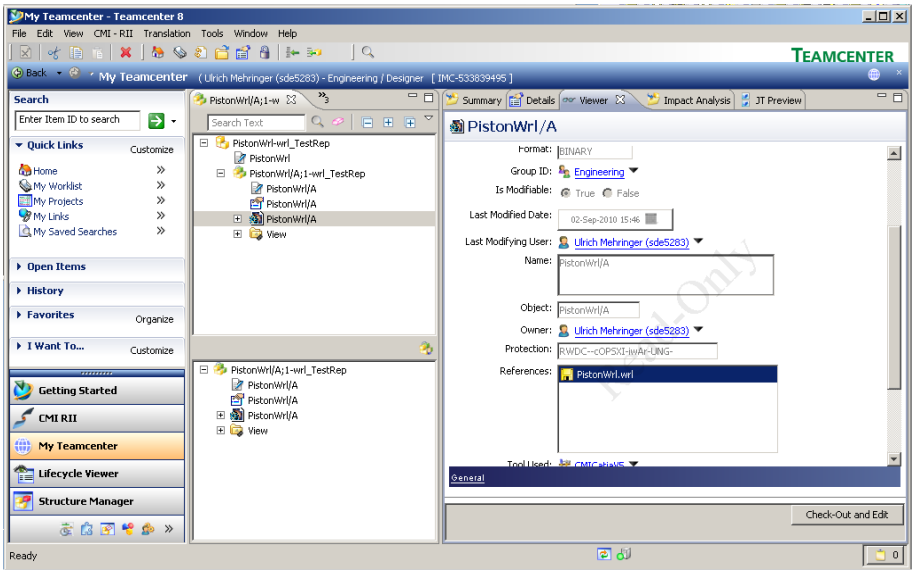

Figure 141: Representation formats in CATIA V5 (CATIA Workbench)

Figure 142 shows the wrl representation loaded in CATIA V5.

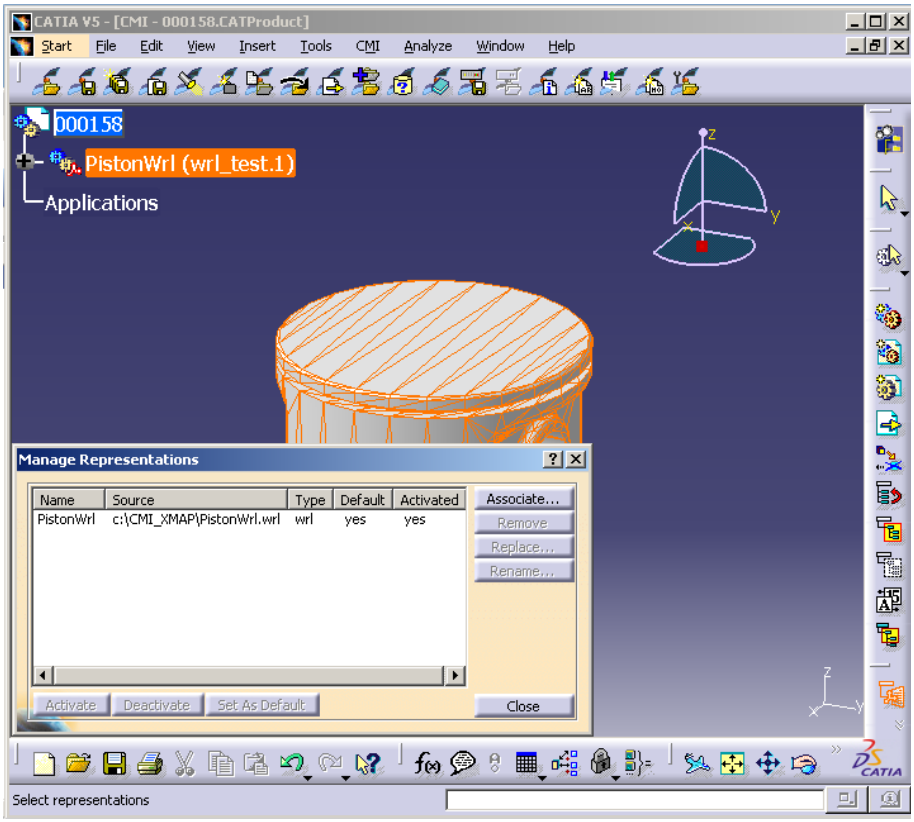

Figure 142: Representation formats in CATIA V5

Import and Export using a mapping file

Set `CMI_ENABLE_CREATE_IMPORT_FILE=ON` in the CATIA environment to enable options in CMI Reconnect and Synchronize Teamcenter commands to map CATIA data that exists both in your PDM system and at a partner site, but under different naming conventions.

Synchronize

Use the *Write Import/Export mapping file* option in the Synchronize dialog (see Figure 143) to record or map original names for CATIA data that is stored in Teamcenter.

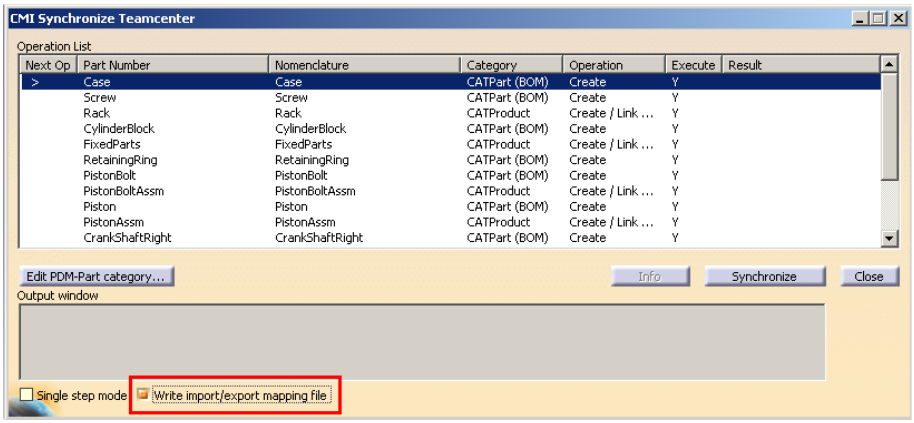
CMI Synchronize Teamcenter
Operation List
Next Op Part Number Nomenclature Category Operation Execute Result
Case Case CATPart (BOM) Create Y
Screw Screw CATPart (BOM) Create Y
Rack Rack CATProduct Create / Link ... Y
CylinderBlock CylinderBlock CATPart (BOM) Create Y
FixedParts FixedParts CATProduct Create / Link ... Y
RetainingRing RetainingRing CATPart (BOM) Create Y
PistonBolt PistonBolt CATPart (BOM) Create Y
PistonBoltAssm PistonBoltAssm CATProduct Create / Link ... Y
Piston Piston CATPart (BOM) Create Y
PistonAssm PistonAssm CATProduct Create / Link ... Y
CrankShaftRight CrankShaftRight CATPart (BOM) Create Y
Edit PDM-Part category...
Info
Synchronize
Close
Output window
Single step mode
Write import/export mapping file

Figure 143: Synchronize Dialog in CATIA V5

As a result of the Synchronize a XML mapping file is created and attached to the top level assembly of the new structure in Teamcenter (see Figure 144). This file maps original names to Teamcenter names and will be used by the *Reconnect* and *Export* commands.

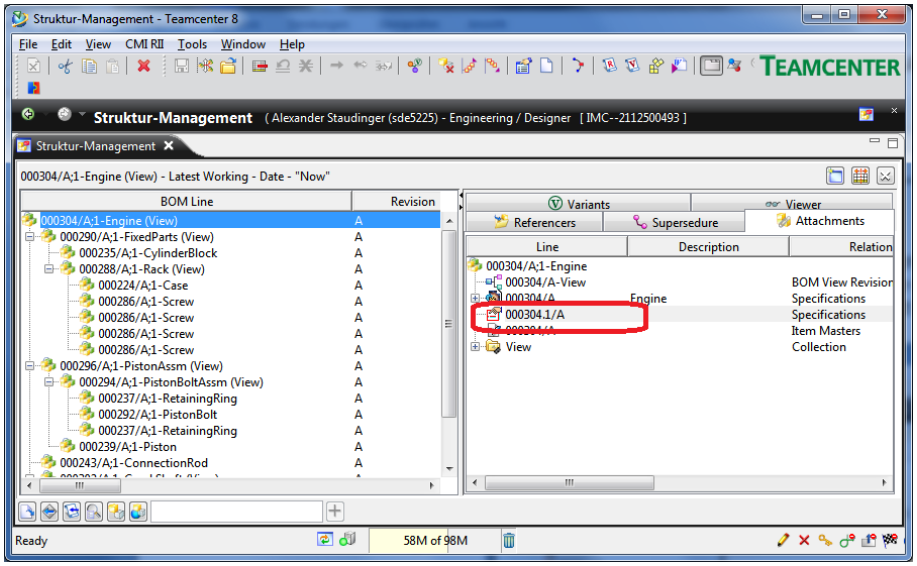

Figure 144: Mapping File in Teamcenter

You should also check this option if you receive a changed version of a structure that was imported, to update the mapping file with new subassemblies.

Reconnect

If a mapping file was created when the product structure was first imported into Teamcenter, this file can be used to map the CATIA names to the names the products have in Teamcenter. Click *Use mapping file* in the reconnect dialog (see Figure 145) to retrieve a mapping file that is attached to the top level part from Teamcenter. If a part was imported from outside, the internal name will be supplied by the mapping file.

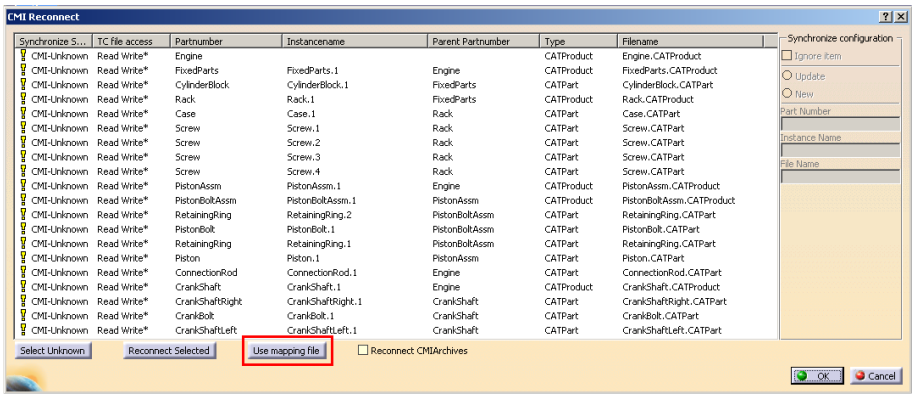

Figure 145: Reconnect dialog in CATIA V5

Export to Folder

To enable this function the administrator has to set the CATIA V5 environment `CMI_ENABLE_EXPORTCMD=ON`.

With the *Export* command you can save data that you have opened from Teamcenter to a folder of your choice. If a mapping file is available the products in the structure can be renamed to their original part numbers and file names.

This allows you to return files that you have originally received from an external partner, in their original state.

Start the Export with the *Export to Folder* button .

CMI asks if you want to use the mapping file (see Figure 146).



Figure 146: Ask use mapping dialog in CATIA V5

- Yes: the structure is stored in the export directory using the original names of the CMI Mapping file.
- No: The structure is stored into the export directory without renaming.

CMI opens a folder selection dialog to select a directory where CMI should store the exported files (see Figure 147).

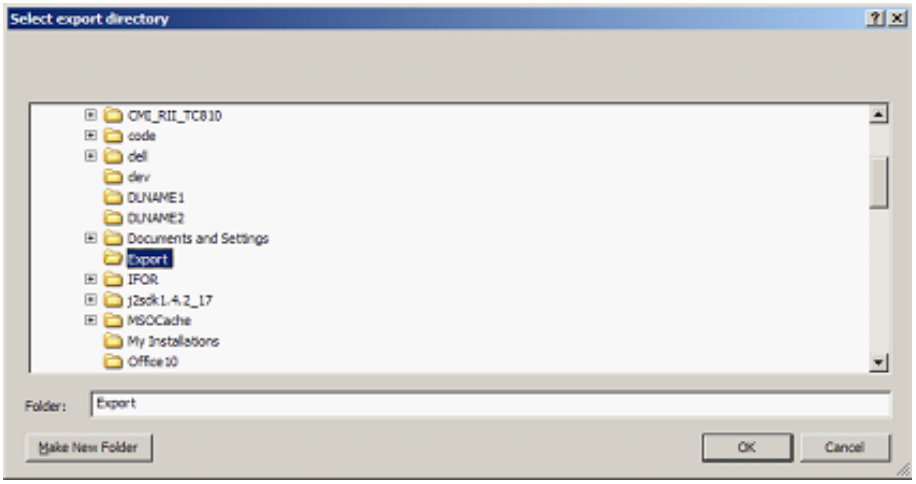

Figure 147: Export Location dialog in CATIA V5

With “OK” CMI performs the export.

After the structure is stored in the export directory CMI shows a summary about the renamed files.

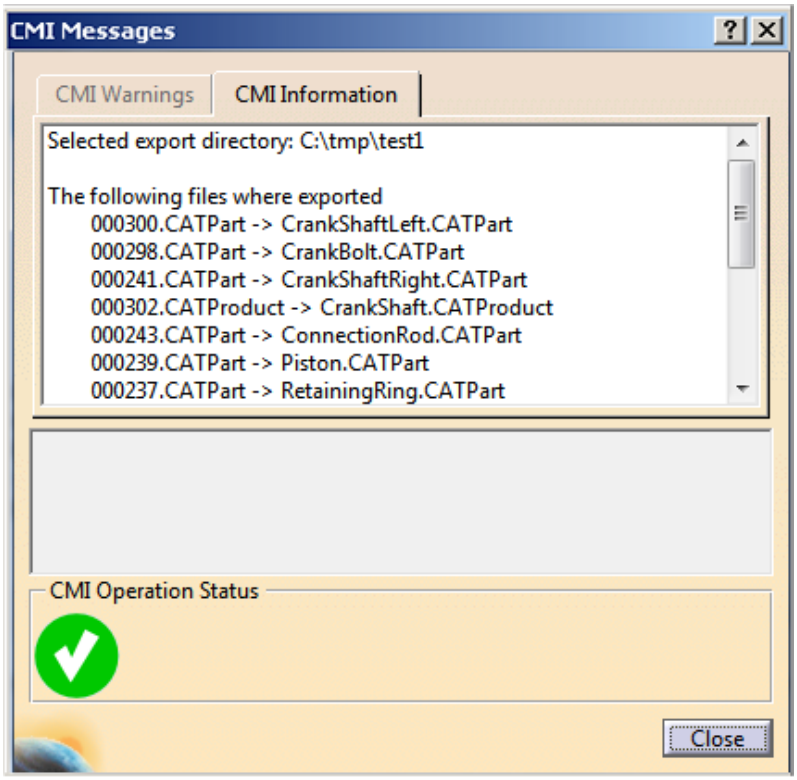

Figure 148: CMI Messages dialog in CATIA V5

The export directory now holds the CATIA files of the exported structure and a CMI Mapping XML file which holds the actual mapping of between Teamcenter and the external structure.

The files in the CATIA session are now “external” and can no longer be updated with CMI. The CATProducts and CATParts point to the external files in the export directory. The part numbers are set to the original part numbers stored in the CMI Mapping file. If CMI_EXPORT_STDATTRIBUTES was set the configured attributes Nomenclature, Definition, Revision or Description are also set back to their original values.

Glossary

Administrator

Person, who configures the system, inserts users, manages user permissions and maintains the database.

Browser

Window that displays *icons* representing *objects*.

Check In

Action that takes from the users the right to update a work item.

Check Out

Action that gives the user the exclusive right to update a work item. Checking out an item creates a copy of the work item in the specified work location.

Configuration Context

An attribute that determines which Item Revision should be displayed (for example, only the last revisions).

Dialog Window

Window in which the user enters information.

Field

Component of a *dialog window* in which the user can enter text.

Generic Workbench

Set of components such as windows, dynamic items and information items, used in *Teamcenter* integration products.

Icon

Graphical representation of an *object*.

List View

Style of *browser* window in which *objects* are viewed as small *icons* in a list with attribute values in columns.

Object

An item or relationship.

Palette

Any group of CATIA functions created for specific requirements.

Plot File

File in a specified format that can be plotted or opened in a viewing tool and represents a 2D view of a model.

Pop-Up Menu

The menu that appears when the user points an *icon* and holds the right mouse button pressed.

Query

To search the database for *objects* that match specific criteria.

Register

To make a file or directory known as an *object* maintained in the Teamcenter database.

Tree View

Style of *browser* window in which *objects* are displayed as relationships in horizontal branches.

Vault

Secure place for storing information. To access the data confined in a vault it is necessary to *check out* or revise the data.